



APC Easy 3S uninterruptible power supply (UPS) Double-conversion (Online) 40 kVA 40000 W

Brand : APC

Product code: E3SUPS40KHB2


Product name : Easy 3S

APC Easy 3S. UPS topology: Double-conversion (Online), Output power capacity: 40 kVA, Output power: 40000 W. AC outlet types: Hardwire. Battery technology: Sealed Lead Acid (VRLA), Battery voltage: 240 V. Form factor: Tower, Product colour: White, International Protection (IP) code: IP20. Compliance certificates: RoHS, Certification: CE, EAC, IEC 62040-1-1, IEC 62040-2, IEC 62040-3, IEC 62040-4, ISTA 2B, RCM, WEEE, REACH



Features		Design	
UPS topology *	Double-conversion (Online)	Form factor *	Tower
Output power capacity *	40 kVA	Product colour *	White
Output power *	40000 W	International Protection (IP) code	IP20
Waveform *	Pure sine	Operational conditions	
Input operation voltage (min) *	304 V	Operating temperature (T-T)	0 - 40 °C
Input operation voltage (max) *	477 V	Storage temperature (T-T)	-15 - 40 °C
Input frequency *	45/65 Hz	Operating relative humidity (H-H)	0 - 95%
Output operation voltage (min)	380 V	Storage relative humidity (H-H)	0 - 95%
Output operation voltage (max)	415 V	Operating altitude	0 - 999.9 m
Output frequency	50/60 Hz	Non-operating altitude	0 - 15000 m
Maximum current	73 A	Certificates	
Number of input phases	3	Compliance certificates	RoHS
Number of output phases	3	Certification	CE, EAC, IEC 62040-1-1, IEC 62040-2, IEC 62040-3, IEC 62040-4, ISTA 2B, RCM, WEEE, REACH
Input power factor	0.99	Packaging content	
Output voltage Total Harmonic Distortion (THD)	3%	Management card included	✗
Input current Total Harmonic Distortion (THD)	3%	Quick installation guide	✓
Noise level	63 dB	Weight & dimensions	
Ports & interfaces		Width	500 mm
AC outlet types	Hardwire	Depth	969 mm
SmartSlot	✓	Height	1400 mm
SmartConnect port	✗		

Battery		Weight & dimensions	
Battery technology	Sealed Lead Acid (VRLA)	Weight	590 kg
Battery voltage	240 V	Packaging data	
Number of batteries supported	4	Package width	683 mm
		Package depth	1114 mm
		Package height	1640 mm
		Package weight	643 kg
Logistics data			
Harmonized System (HS) code		85078000	
Other features			
Output voltage		400 V	

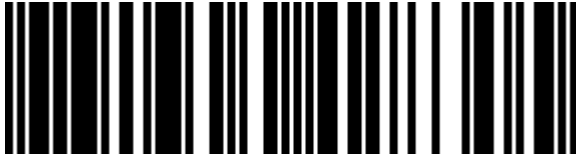

0731304428305



731304428305



8592978343583

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity. Automated scraping, data mining, or harvesting for the purpose of training machine learning models, neural networks, or artificial intelligence systems is strictly prohibited without a commercial license.