



APC Easy UPS 3S uninterruptible power supply (UPS) Double-conversion (Online) 40 kVA 40000 W

Brand : APC

Product code: E3SUPS40KHB1


Product name : Easy UPS 3S

APC Easy UPS 3S. UPS topology: Double-conversion (Online), Output power capacity: 40 kVA, Output power: 40000 W. AC outlet types: Hardwire, Terminal, Serial interface type: RS-232. Battery technology: Sealed Lead Acid (VRLA), Battery voltage: 240 V, Typical backup time at full load: 10 min. Form factor: Tower, Product colour: White, Display type: LCD. Compliance certificates: RoHS, Certification: CE, EAC, IEC 62040-2, IEC 62040-3, IEC 62040-4, ISTA 2B, RCM, WEEE, REACH



Features		Design	
UPS topology *	Double-conversion (Online)	Form factor *	Tower
Output power capacity *	40 kVA	Product colour *	White
Output power *	40000 W	Display type	LCD
Waveform *	Pure sine	International Protection (IP) code	IP20
Input operation voltage (min) *	304 V	Operational conditions	
Input operation voltage (max) *	477 V	Operating temperature (T-T)	0 - 40 °C
Input frequency *	50/60 Hz	Storage temperature (T-T)	-15 - 40 °C
Output operation voltage (min)	380 V	Operating relative humidity (H-H)	0 - 95%
Output operation voltage (max)	400 V	Storage relative humidity (H-H)	0 - 95%
Output frequency regulation	45 - 65 Hz	Operating altitude	0 - 9999 m
Maximum current	73 A	Non-operating altitude	0 - 15000 m
Number of input phases	3	Certificates	
Number of output phases	3	Compliance certificates	RoHS
Efficiency	96%	Certification	CE, EAC, IEC 62040-2, IEC 62040-3, IEC 62040-4, ISTA 2B, RCM, WEEE, REACH
Emergency Power Off (EPO)	✓	Packaging content	
Output voltage Total Harmonic Distortion (THD)	3%	Management card included	✗
Noise level	63 dB	Safety regulation & standards	
Ports & interfaces		Safety	IEC 62040-1-1
AC outlet types	Hardwire, Terminal	Weight & dimensions	
USB port	✓	Width	500 mm
Serial interface	✓		
Serial interface type	RS-232		

Ports & interfaces		Weight & dimensions	
SmartSlot	✓	Depth	969 mm
SmartConnect port	✗	Height	1400 mm
Battery		Weight	590 kg
		Packaging data	
		Package width	683 mm
		Package depth	1114 mm
Battery technology	Sealed Lead Acid (VRLA)	Package height	1640 mm
Battery voltage	240 V	Package weight	643 kg
Typical backup time at full load	10 min	Logistics data	
		Harmonized System (HS) code	85078000

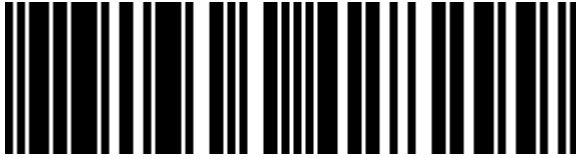

0731304428299



731304428299



8592978409234

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity. Automated scraping, data mining, or harvesting for the purpose of training machine learning models, neural networks, or artificial intelligence systems is strictly prohibited without a commercial license.