Lindy 5m USB 2.0 Type A to B Cable, Anthra Line

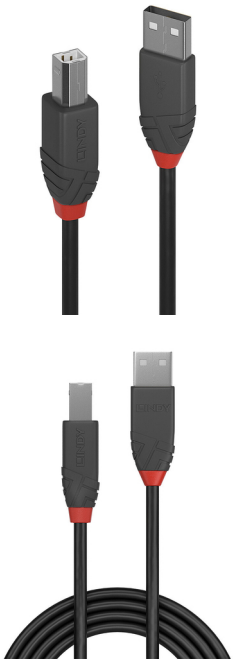

Brand : Lindy

Product code: 36675

Product name : 5m USB 2.0 Type A to B Cable, Anthra Line

5m USB 2.0 Type A to B Cable, Anthra Line

Lindy 5m USB 2.0 Type A to B Cable, Anthra Line:

From the Lines cable connectivity concept developed by Lindy, Anthra Line USB 2.0 Type A to B cables are the professional choice for high performance connections in commercial AV and IT installations.

Anthra Line USB 2.0 cables are premium connections that feature double shielded construction with copper conductors for performance and corrosion resistance. High quality gold plated contacts and connectors maintain optimal signal integrity and maximum reliability.

Data transfer speeds up to 480Mbps are supported for the quick and effortless transfer of large data volumes.

Anthra Line USB 2.0 Type A to B cables are available in lengths from 0.2m to 10m.
Lindy 5m USB 2.0 Type A to B Cable, Anthra Line. Cable length: 5 m. Connector 1: USB A, Connector 2: USB B, USB version: USB 2.0, Maximum data transfer rate: 0.48 Gbit/s, Connector contacts plating: Gold, Product colour: Black

Features	
USB version *	USB 2.0
Connector 1 *	USB A
Connector 2 *	USB B
Connector 1 gender *	Male
Connector 2 gender *	Male
Connector 1 form factor	Straight
Connector 2 form factor	Straight
AWG wire size	26/28
Connector material	Nickel
Contact material	Copper
Connector contacts plating	Gold
Cable jacket material	Polyvinyl chloride (PVC)
Conductor material	Tinned copper
Connector shielding	✔
Connector shield material	Aluminium
Connector housing material	Polyvinyl chloride (PVC)
Maximum data transfer rate	480 Mbit/s
Maximum data transfer rate	0.48 Gbit/s
Cable type	Round cable
Product colour *	Black

Features	
Nominal attenuation	5.8db/km
Weight & dimensions	
Cable length *	5 m
Cable diameter	4.4 mm
Bend radius (min)	1.6 cm
Connector 1 dimensions (WxDxH)	15.5 x 35 x 7.8 mm
Connector 2 dimensions (WxDxH)	11.8 x 35 x 10.2 mm
Packaging data	
Package type	Polybag
Packaging content	
Quantity per pack *	1 pc(s)
Operational conditions	
Operating temperature (T-T)	0 - 60 °C
Storage temperature (T-T)	0 - 60 °C
Certificates	
Certification	RoHS, REACH, UL
Logistics data	
Harmonized System (HS) code	84733080

4002888366755

Catalog Object Cloud

Publication date: 17-JUN-2026. Prints or copies of Information are only valid on the printed Publication date