EPSON

Epson TM-T20III 203 x 203 DPI Wired Thermal POS printer

Brand : Epson

Product name : TM-T20III

Product code: C31CH51012

- Economical: Automatic paper reduction function
- Reliable: Mechanism life of 15 million lines
- Fast print speed: Print speed of 250mm/sec
- Flexible connectivity: Two models: 1) USB + Serial 2) Ethernet
- Peace of mind: Epson is Europe's number one POS printer manufacturer
Themal Line, 250 mm/sec, 80 mm, 203 dpi, Ethernet, 55 dB, 1.7 kg
Epson TM-T20III. Print technology: Thermal, Type: POS printer, Maximum resolution: 203 x 203 DPI.
Maximum roll diameter: 8.3 cm, Supported paper width: 48, 64, 80 mm. Connectivity technology: Wired,
Standard interfaces: Ethernet. Sound pressure level (printing): 55 dB, Mean time between failures
(MTBF): 360000 h, Autocutter durability: 1.5 million cuts. Product colour: Black

Printing	
Maximum resolution	203 x 203 DPI
Print speed	250 mm/sec
Character density	22.6 cpi
Character sets	ANK
Print technology *	Thermal
Type *	POS printer

Paper handling	
Maximum roll diameter	8.3 cm
Supported paper width	48, 64, 80 mm

Ports & interfaces	
Connectivity technology *	Wired
Standard interfaces	Ethernet

Network	
Ethernet LAN *	✔
Wi-Fi *	✘

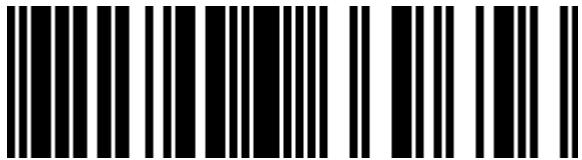| **Features**	
Sound pressure level (printing)	55 dB
Mean time between failures (MTBF)	360000 h
Cutter	✔
Autocutter durability	1.5 million cuts
Print head life	150 km
Country of origin	Philippines
Built-in sensors details	Roll paper cover open sensor, Paper End Sensor, Paper Near End Sensor
Certification	FCC class A, CE marking, EN55022 Class A, UL, CSA, TÜV

Design	
Product colour *	Black

Operational conditions	
Storage relative humidity (H-H)	10 - 90%

Weight & dimensions	
Width	140 mm
Depth	199 mm
Height	146 mm
Weight	1.7 kg

Packaging data	
Cables included	AC
Quantity per pack	1 pc(s)
Package width	192 mm
Package depth	235 mm
Package height	280 mm
Package weight	2.49 kg

Packaging content	
Drivers included	✔
Quick start guide	✔
AC adapter included	✔

Logistics data	
Pallet weight (UK)	0 g
Harmonized System (HS) code	84433210
Products per master (outer) case	4 pc(s)
Master (outer) case width	400 mm
Master (outer) case length	490 mm
Master (outer) case height	295 mm
Master (outer) case gross weight	0 g
Products per pallet	112 pc(s)
Products per pallet layer	16 pc(s)
Pallet gross weight	0 g
Products per pallet (UK)	168 pc(s)

Power			**Logistics data**	
Power source type *	AC		Products per pallet layer (UK)	24 pc(s)
AC input voltage	24 V		**Other features**	
Operational conditions			Buffer size	45 KB
Operating temperature (T-T)	5 - 45 °C		Mean cycles between failures (MCBF)	60000000
Storage temperature (T-T)	-10 - 50 °C		Print head life	150 million characters
Operating relative humidity (H-H)	10 - 90%			

8715946669656

Catalog Object Cloud