

## Zebra DS8178-HC Handheld bar code reader 1D/2D LED White

**Brand :** Zebra

**Product code:** DS8178-HCBU210SS5W

**Product name :** DS8178-HC

Healthcare, White, 1D/2D, IP42, RS-232, USB kit

[Zebra DS8178-HC Handheld bar code reader 1D/2D LED White:](#)


Better Workflows for Healthcare Professionals. Better Experiences for Patients.

As a healthcare provider, you need to give your healthcare professionals the tools they need to provide the very best in patient care, every second of every day. With the DS8100-HC Series handheld imagers, you can.

This premium handheld scanner is purpose-built for healthcare environments, with unparalleled performance on virtually every barcode in any condition, a first-of-its-kind housing delivering maximum protection against the spread of bacteria, flexible user-selectable feedback modes designed for around-the-clock use and more. Streamline workflows for your healthcare professional and deliver better patient experiences with the DS8100-HC Series — only from Zebra.



Scanning		Power	
Type *	Handheld bar code reader	Power source type *	Battery
Scanner type *	1D/2D	Battery technology	Lithium-Ion (Li-Ion)
Sensor type *	LED	Battery type	Built-in battery
Linear (1D) barcodes supported *	Codabar, Code 11, Code 128, Code 39, Code 93, GS1 DataBar Expanded, Interleaved 2 of 5, MSI, Plessey, U.P.C.	Number of batteries supported	1
	Aztec Code, Composite Codes, Data Matrix, Han Xin, MaxiCode, Micro QR Code, MicroPDF417, PDF417, QR Code, TLC-39	Battery capacity	2500 mAh
2D (matrix & stacked) barcodes supported *		Number of reads per charge	65000
		Battery life	83 h
Wavelength	528 nm	Input voltage	5 V
Tilt reading angle	0 - 360°	Weight & dimensions	
Pitch reading angle	0 - 60°	Width	66 mm
Yaw reading angle	0 - 60°	Depth	107 mm
		Height	168 mm
		Weight *	235 g
Ports & interfaces		Operational conditions	
Connectivity technology *	Wired & Wireless	Operating temperature (T-T)	0 - 50 °C
Standard interfaces *	Keyboard wedge, RS-232, USB	Storage temperature (T-T)	-40 - 70 °C
Wireless range	100 m	Operating relative humidity (H-H)	5 - 95%
Bluetooth version	4.0	Logistics data	
Bluetooth Low Energy (BLE)	✓	Harmonized System (HS) code	84716070
Performance			
International Protection (IP) code	IP42		
Product colour *	White		

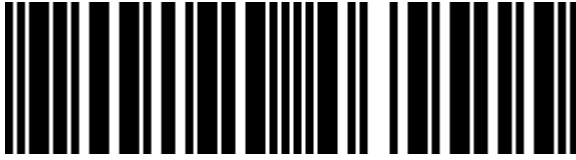

5704174465515



8596375197855

### Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.