DELL UltraSharp 27 4K USB-C Hub Monitor - U2723QE

Brand : DELL   **Product family:** UltraSharp   **Product code:** DELL-U2723QE

Product name : Dell UltraSharp 27 4K USB-C Hub Monitor - U2723QE

- 68.6cm (27") 4K Ultra HD 3840 x 2160 LED IPS
- 8ms, 16:9, 400cd/m², 2000:1
- USB, HDMI, DisplayPort
68.6cm (27") 4K Ultra HD 3840 x 2160 LED IPS, 16:9, 400cd/m², 1.07B, 8ms, 178°/178°, 2000:1

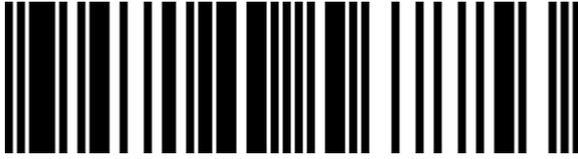**DELL UltraSharp 27 4K USB-C Hub Monitor - U2723QE:**

Be your most productive on a 27 inch monitor with brilliant color and contrast that features the industry's first IPS Black technology and a connectivity hub.
DELL UltraSharp 27 4K USB-C Hub Monitor - U2723QE. Display diagonal: 68.6 cm (27"), Display resolution: 3840 x 2160 pixels, HD type: 4K Ultra HD, Display technology: LCD, Response time: 8 ms, Native aspect ratio: 16:9, Viewing angle, horizontal: 178°, Viewing angle, vertical: 178°. Built-in USB hub, USB hub version: 3.2 Gen 2 (3.1 Gen 2). VESA mounting, Height adjustment. Product colour: Silver

Display

Display diagonal *	68.6 cm (27")
Display resolution *	3840 x 2160 pixels
HD type *	4K Ultra HD
Native aspect ratio *	16:9
Display technology *	LCD
Panel type *	IPS
Backlight type	LED
Touchscreen *	✗
Display brightness (typical)	400 cd/m²
Response time *	8 ms
Anti-glare screen	✔
Screen shape *	Flat
Supported video modes	480p, 576p, 720p, 1080i, 1080p
Contrast ratio (typical) *	2000:1
Maximum refresh rate *	60 Hz
Viewing angle, horizontal	178°
Viewing angle, vertical	178°
Display number of colours *	1.07 billion colours
Response time (fast)	5 ms
Pixel pitch	0.1554 x 0.1554 mm
Pixel density	163.18 ppi
Horizontal scan range	15 - 140 kHz
Vertical scan range	23 - 86 Hz
Viewable size, horizontal	59.7 cm
Viewable size, vertical	33.6 cm
Display diagonal (metric)	68.47 cm
High Dynamic Range (HDR) supported	✔
DDC/CI	✔
Surface hardness	3H
Colour gamut standard	sRGB

Ergonomics

Tilt angle range	-5 - 21°
On Screen Display (OSD)	✔
Plug and Play	✔

Power

Energy efficiency class (SDR) *	F
Energy efficiency class (HDR) *	G
Energy consumption (SDR) per 1000 hours *	26 kWh
Energy consumption (HDR) per 1000 hours *	38 kWh
Power consumption (typical) *	25.9 W
Power consumption (standby) *	0.3 W
Power consumption (max)	220 W
Power consumption (off)	0.2 W
AC input voltage	100 - 240 V
AC input frequency	50 - 60 Hz
Input current	2.7 A
Power supply type	Internal
Energy efficiency scale	A to G

Operational conditions

Operating temperature (T-T)	0 - 40 °C
Storage temperature (T-T)	-20 - 60 °C
Operating relative humidity (H-H)	10 - 80%
Storage relative humidity (H-H)	5 - 90%
Operating altitude	0 - 5000 m
Non-operating altitude	0 - 12192 m

Weight & dimensions

Width (with stand)	611.4 mm
Depth (with stand)	185 mm
Height (with stand)	385.2 mm

Display

sRGB coverage (typical)	100%
DCI-P3 coverage	98%
Heat dissipation (typical)	98.27 BTU/h

Performance

NVIDIA G-SYNC *	✗
AMD FreeSync *	✗
Flicker-free technology	✔
Low Blue Light technology	✔

Multimedia

Built-in speaker(s) *	✗
Built-in camera *	✗

Design

Market positioning *	Office
Product colour *	Silver
Front bezel colour	Black
Feet colour	Silver

Ports & interfaces

Built-in USB hub *	✔
USB hub version	3.2 Gen 2 (3.1 Gen 2)
USB upstream port type	USB Type-C
Number of upstream ports	2
Number of USB Type-C upstream ports quantity	1
USB Type-A downstream ports quantity	5
USB Power Delivery (USB PD)	✔
USB Power Delivery up to	90 W
HDMI *	✔
HDMI ports quantity	1
HDMI version	2.0
DisplayPorts quantity	2
Audio output	✔
Headphone out *	✔
Headphone outputs	1
Headphone connectivity	3.5 mm
HDCP	✔

Network

Wi-Fi	✗

Ergonomics

VESA mounting *	✔
Panel mounting interface	100 x 100 mm
Cable lock slot *	✔
Height adjustment *	✔
Adjustable height (max)	15 cm
Pivot	✔
Pivot angle	-90 - 90°
Swivelling	✔
Swivel angle range	-45 - 45°
Tilt adjustment	✔

Weight & dimensions

Weight (with stand)	6.27 kg
Width (without stand)	611.4 mm
Depth (without stand)	54.3 mm
Height (without stand)	353 mm
Weight (without stand)	4.48 kg
Bezel width (side)	7.35 mm
Bezel width (top)	7.35 mm
Bezel width (bottom)	1 cm
Stand weight	1.79 kg

Packaging data

Package weight	9.53 kg

Packaging content

Stand included	✔
Cables included	AC, DisplayPort, USB Type-C to USB Type-A, USB Type-C to USB Type-C
Quick start guide	✔

Sustainability

Sustainability certificates	ENERGY STAR, EPEAT Gold, TCO
Doesn't contain	Arsenic, PVC/BFR

Carbon footprint

Total carbon footprint (kg of CO2e)	815
Total carbon emissions, standard deviation (kg of CO2e)	203
Carbon emissions, manufacturing (kg of CO2e)	411.27
Carbon emissions, logistics (kg of CO2e)	85.3
Carbon emissions, energy usage (kg of CO2e)	313
Carbon emissions, end-of-life (kg of CO2e)	5.35
PAIA version	1.3.0, 2021

Other features

Picture-by-Picture (PbP)	✔
RJ-45 ports quantity	1
Heavy metals free	Hg (mercury)
Compliance certificates	RoHS
Power management	✔
Supplied AC adapter type	3840 x 2160
Compliance industry standards	ENERGY STAR certified Monitor. EPEAT registered where applicable. TCO Certified & TCO Certified Edge. RoHS Compliant. BFR/PVC Free monitor Meets NFPA 99 leakage current requirements. Arsenic-Free glass and Mercury-Free for the panel only.

Logistics data

Harmonized System (HS) code	85285210

5397184567753

5704174841043

5704174841036
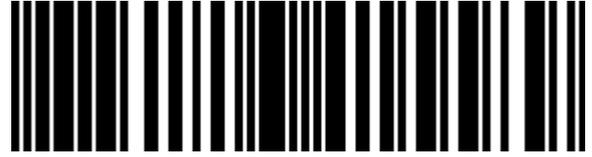
0884116415589

884116415589

Catalog Object Cloud