



## Lindy 3m USB 2.0 Type C to Micro-B Cable, Anthra Line

**Brand :** Lindy

**Product code:** 36893

**Product name :** 3m USB 2.0 Type C to Micro-B Cable, Anthra Line

3m USB 2.0 Type C to Micro-B Cable, Anthra Line

[Lindy 3m USB 2.0 Type C to Micro-B Cable, Anthra Line:](#)


The Anthra Line USB 2.0 Type C to Micro-B cables from Lindy's Cable Lines concept are the professional choice for high performance connections in commercial AV and IT installations.

They are premium connections that feature double shielded construction with tinned copper conductors for performance and corrosion resistance. High quality gold plated contacts maintain signal integrity and reliability.

Data transfer speeds up to 480Mbps are supported for the quick and effortless transfer of large data volumes.

USB Type C features a reversible connector, so no matter which orientation the cable is inserted, a connection will always be found. This connector allows a fully bi-directional cable with automatic host and device negotiation.

Anthra Line USB 2.0 Type C to Micro-B cables are available in the following lengths: 0.5m, 1m, 2m and 3m.

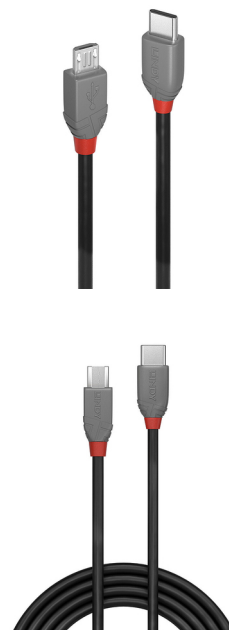

Features		Weight & dimensions	
USB version *	USB 2.0	Cable length *	3 m
Connector 1 *	USB C	Cable diameter	3.5 mm
Connector 2 *	Micro-USB B	Bend radius (min)	2.5 cm
Connector 1 gender *	Male	Connector 1 dimensions (WxDxH)	10.9 x 28.3 x 7.2 mm
Connector 2 gender *	Male	Connector 2 dimensions (WxDxH)	10.7 x 30 x 7.6 mm
Connector 1 form factor	Straight	<b>Packaging data</b>	
Connector 2 form factor	Straight	Package type	Polybag
AWG wire size	28	<b>Packaging content</b>	
Connector contacts plating	Nickel	Quantity per pack *	1 pc(s)
Cable jacket material	Polyvinyl chloride (PVC)	<b>Operational conditions</b>	
Conductor material	Tinned copper	Operating temperature (T-T)	0 - 40 °C
Connector shielding	✓	Storage temperature (T-T)	0 - 70 °C
Maximum data transfer rate	480 Mbit/s	<b>Certificates</b>	
Maximum data transfer rate	0.48 Gbit/s	Certification	RoHS, REACH, California Proposition, UL
Cable type	Round cable	<b>Logistics data</b>	
Product colour *	Black	Harmonized System (HS) code	84733080
Nominal attenuation	1-400MHz < 5.8dB		



4002888368933

### Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity. Automated scraping, data mining, or harvesting for the purpose of training machine learning models, neural networks, or artificial intelligence systems is strictly prohibited without a commercial license.