



Lindy 3m USB 2.0 Type C to Micro-B Cable, Anthra Line

Brand : Lindy

Product code: 36893

Product name : 3m USB 2.0 Type C to Micro-B Cable, Anthra Line

3m USB 2.0 Type C to Micro-B Cable, Anthra Line

[Lindy 3m USB 2.0 Type C to Micro-B Cable, Anthra Line:](#)


The Anthra Line USB 2.0 Type C to Micro-B cables from Lindy's Cable Lines concept are the professional choice for high performance connections in commercial AV and IT installations.

They are premium connections that feature double shielded construction with tinned copper conductors for performance and corrosion resistance. High quality gold plated contacts maintain signal integrity and reliability.

Data transfer speeds up to 480Mbps are supported for the quick and effortless transfer of large data volumes.

USB Type C features a reversible connector, so no matter which orientation the cable is inserted, a connection will always be found. This connector allows a fully bi-directional cable with automatic host and device negotiation.

Anthra Line USB 2.0 Type C to Micro-B cables are available in the following lengths: 0.5m, 1m, 2m and 3m.

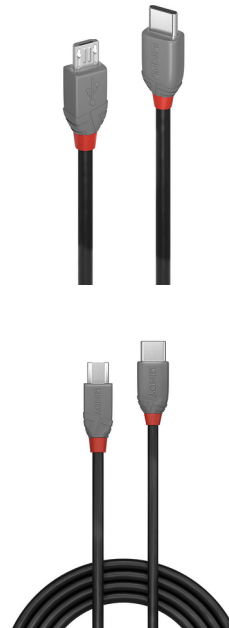

| Features | | Weight & dimensions | |
|----------------------------|--------------------------|--------------------------------|---|
| USB version * | USB 2.0 | Cable length * | 3 m |
| Connector 1 * | USB C | Cable diameter | 3.5 mm |
| Connector 2 * | Micro-USB B | Bend radius (min) | 2.5 cm |
| Connector 1 gender * | Male | Connector 1 dimensions (WxDxH) | 10.9 x 28.3 x 7.2 mm |
| Connector 2 gender * | Male | Connector 2 dimensions (WxDxH) | 10.7 x 30 x 7.6 mm |
| Connector 1 form factor | Straight | Packaging data | |
| Connector 2 form factor | Straight | Package type | Polybag |
| AWG wire size | 28 | Packaging content | |
| Connector contacts plating | Nickel | Quantity per pack * | 1 pc(s) |
| Cable jacket material | Polyvinyl chloride (PVC) | Operational conditions | |
| Conductor material | Tinned copper | Operating temperature (T-T) | 0 - 40 °C |
| Connector shielding | ✓ | Storage temperature (T-T) | 0 - 70 °C |
| Maximum data transfer rate | 480 Mbit/s | Certificates | |
| Maximum data transfer rate | 0.48 Gbit/s | Certification | RoHS, REACH, California Proposition, UL |
| Product colour * | Black | Logistics data | |
| Cable type | Round cable | Harmonized System (HS) code | 84733080 |
| Nominal attenuation | 1-400MHz < 5.8dB | | |



4002888368933

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.