**Canon**

# Canon imagePROGRAF PRO-4100 stampante grandi formati Wi-Fi Ad inchiostro A colori 2400 x 1200 DPI A0 (841 x 1189 mm) Collegamento ethernet LAN

**Marchio :** Canon

**Famiglia del prodotto:** imagePROGRAF

**Codice prodotto:** 3869C003
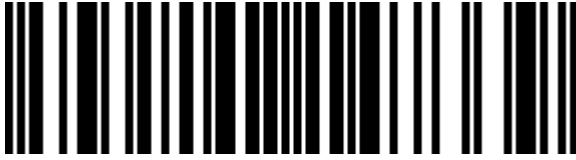
**Nome del prodotto :**
PRO-4100

Canon imagePROGRAF PRO-4100. Tecnologia di stampa: Ad inchiostro, Risoluzione massima: 2400 x 1200 DPI, Testina di stampa: PF-10. Dimensioni massime di stampa: A0 (841 x 1189 mm), Dimensioni ISO serie-A (A0...A9): A0, A1, A2, A3, A3+, Dimensioni ISO serie-B (B0...B9): B0, B1, B2, B4. Connettore USB: USB tipo A, Velocità trasferimento Ethernet LAN: 10,100,1000 Mbit/s. Capacità memoria interna: 500 GB, Supporto di memoria: HDD, Livello di pressione acustica (modalità silenziosa): 35 dB. Consumi (modalità stand-by): 2 W, Consumi: 107 W, Consumi (modalità spento): 0,3 W

## Printing

| | |
|---|---|
| Print technology * | Inkjet |
| Colour * | ✔ |
| Maximum resolution * | 2400 x 1200 DPI |
| Number of print cartridges * | 1 |
| Borderless printing | ✔ |
| Print head | PF-10 |

## Copying

| | |
|---|---|
| Copying * | ✘ |

## Scanning

| | |
|---|---|
| Scanning * | ✘ |

## Paper handling

| | |
|---|---|
| Maximum print size * | A0 (841 x 1189 mm) |
| ISO A-series sizes (A0...A9) | A0, A1, A2, A3, A3+ |
| ISO B-series sizes (B0...B9) | B0, B1, B2, B4 |
| Cut sheets * | ✔ |
| Media thickness | 0.07 - 0.8 mm |
| Maximum roll length | 18 m |
| Maximum roll diameter | 17 cm |
| Roll top margin | 3 mm |
| Media width (sheets) | 152,4 - 1118 mm |
| Media width (rolls) | 152,4 - 1118 mm |
| Roll paper | ✔ |

## Ports & interfaces

| | |
|---|---|
| Wi-Fi * | ✔ |
| Ethernet LAN * | ✔ |
| USB port * | ✔ |
| USB connector | USB Type-A |
| USB 2.0 ports quantity | 1 |
| Ethernet LAN data rates | 10,100,1000 Mbit/s |
| RJ-45 ports quantity | 1 |

## Performance

| | |
|---|---|
| Sound pressure level (quiet mode) | 35 dB |
| Sound pressure level (printing) | 48 dB |
| RAM capacity | 3 GB |
| Certification | TUV, CB, CE, EAC |

## Power

| | |
|---|---|
| Power consumption (standby) | 2 W |
| Power consumption (typical) | 107 W |
| Power consumption (off) | 0.3 W |

## Operational conditions

| | |
|---|---|
| Operating temperature (T-T) | 15 - 30 °C |
| Operating relative humidity (H-H) | 10 - 80% |

## System requirements

| | |
|---|---|
| Windows operating systems supported | Windows 10, Windows 7, Windows 8, Windows 8.1 |
| Mac operating systems supported | Mac OS X 10.10 Yosemite, Mac OS X 10.11 El Capitan, Mac OS X 10.12 Sierra, Mac OS X 10.14 Mojave |

## Weight & dimensions

| | |
|---|---|
| Width | 1820 mm |
| Depth | 915 mm |
| Height | 1042 mm |
| Weight | 177 kg |

## Packaging data

| | |
|---|---|
| Package width | 1593 mm |
| Package depth | 984 mm |
| Package height | 1168 mm |
| Package weight | 145 kg |
| Drivers included | ✔ |
| Bundled software | imagePROGRAF Printer Driver, Professional Print & Layout,† Free Layout Plus, PosterArtist Lite |

## Logistics data

| | |
|---|---|
| Harmonized System (HS) code | 84433210 |

## Performance

| | |
|---|---|
| Internal storage capacity | 500 GB |
| Storage media | HDD |

**4549292147339**