

Dell Pro Precision 5 14

PW514261

Setup and Specifications

Notes, cautions, and warnings

 **NOTE:** A NOTE indicates important information that helps you make better use of your product.

 **CAUTION:** A CAUTION indicates either potential damage to hardware or loss of data and tells you how to avoid the problem.

 **WARNING:** A WARNING indicates a potential for property damage, personal injury, or death.

Chapter 1: Views of Dell Pro Precision 5 14 PW514261.....	5
Right view.....	5
Left view.....	5
Top view.....	7
Front view.....	8
Bottom view.....	9
Locate the Service Tag or Express Service Code label of your computer.....	9
Battery-status light.....	10
Chapter 2: Set up your Dell Pro Precision 5 14 PW514261.....	11
Chapter 3: Specifications of Dell Pro Precision 5 14 PW514261.....	13
Dimensions and weight.....	13
Processor.....	13
Chipset.....	14
Operating system.....	14
Memory.....	14
External ports and slots.....	15
Internal slots.....	15
Ethernet.....	16
Wireless module.....	16
Audio.....	17
Storage.....	17
Keyboard.....	17
Keyboard shortcuts.....	18
Camera.....	20
Touchpad.....	20
Power adapter.....	21
Power adapter requirements.....	21
Battery.....	22
Display.....	23
Fingerprint reader (optional).....	24
GPU—Integrated.....	24
GPU—Discrete.....	24
Multiple display support matrix.....	25
Hardware security.....	25
Smart-card reader.....	25
Contacted smart-card reader.....	25
Contactless smart-card reader.....	26
Operating and storage environment.....	27
ComfortView Plus.....	28
Dell Optimizer.....	28
Dell support policy.....	28

Chapter 4: Getting help and contacting Dell..... 29

Chapter 5: Revision history..... 30

Views of Dell Pro Precision 5 14 PW514261

Right view



Figure 1. Right view

1. Global headset port

Connect headphones or a headset (headphone and microphone combo).

2. USB 3.2 Gen 1 (5 Gbps) port with PowerShare

Connect devices such as external storage devices and printers.

Provides data transfer speeds up to 5 Gbps. PowerShare enables you to charge your USB devices even when your computer is turned off.

NOTE: If your computer is turned off or in a hibernation state, you must connect the power adapter to charge your devices using the PowerShare port. You must enable this feature in the BIOS setup program.

NOTE: Certain USB devices may not charge when the computer is turned off or in a sleep state. In such cases, turn on the computer to charge the device.

3. RJ45 ethernet port (1 Gbps)

Connect an RJ45 ethernet cable from a router or a broadband modem for network or Internet access, with a transfer rate of 10/100/1000 Mbps (maximum 1 Gbps).

4. Security-cable slot (wedge-shaped)

Connect a security cable to prevent unauthorized movement of your computer.

Left view

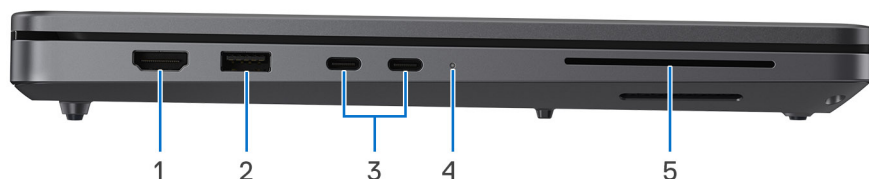


Figure 2. Left view

1. HDMI 2.1 port

Connect to a TV, external display, or another HDMI-in enabled device. Provides video and audio output.

2. **USB 3.2 Gen 1 (5 Gbps) port**

Connect devices such as external storage devices and printers. Provides data transfer speeds up to 5 Gbps.

3. **Two Thunderbolt 4 (40 Gbps) ports with Power Delivery and DisplayPort**

Supports USB4, DisplayPort 2.1, Thunderbolt 4 and also enables you to connect to an external display using a display adapter. Provides data transfer rates of up to 40 Gbps for USB4 and Thunderbolt 4.

 **NOTE:** The power adapter is to be connected to one of these Thunderbolt 4 ports.

 **NOTE:** You can connect a Dell Docking Station to the Thunderbolt 4 ports. For more information, search in the Knowledge Base Resource at [Dell Support Site](#).

 **NOTE:** A USB Type-C to DisplayPort adapter (sold separately) is required to connect a DisplayPort device.

 **NOTE:** USB4 is backward compatible with USB 3.2, USB 2.0, and Thunderbolt 3.

 **NOTE:** Thunderbolt 4 supports two 4K displays or one 8K display.

4. **Power and battery-status light**

Indicates the power state and battery state of the computer.

Solid white—Power adapter is connected and the battery is charging.

Solid amber—Computer is running on battery and the battery charge is low or critical.

Off—Power adapter is disconnected or the battery is fully charged.

 **NOTE:** On certain computer models, the power and battery-status light are also used for diagnostics. For more information, see the *Troubleshooting* section in this document.

5. **Smart-card reader slot (optional)**

Reads information from a smart card with a built-in-chip.

Top view



Figure 3. Top view

1. Power button with optional fingerprint reader

Press to turn on the computer if it is turned off, in sleep state, or in hibernate state.

When the computer is turned on, press the power button to put the computer into sleep state; press and hold the power button for ten seconds to force shut-down the computer.

If the power button has a fingerprint reader, place your finger on the power button to log in.




Figure 4. Active area of the fingerprint reader

NOTE: The highlighted area indicates the actual active fingerprint reader area, and the image is for illustration purposes only.

NOTE: You can customize power-button behavior in Windows. For more information, see [Manuals at Dell Support Site](#).

2. Precision touchpad

Move your finger on the touchpad to move the mouse pointer. Tap to left-click and two fingers tap to right-click.

Front view



Figure 5. Front view

1. Left microphone

Provides digital sound input for audio recording and voice calls.

2. IR Sensor (optional)

The sensor detects the absence of the user and locks the computer to secure it and reduce power consumption.

3. Infrared emitter (optional)

Emits infrared light to support the infrared camera in detecting facial features and tracking motion for secure and responsive functionality.

4. Privacy shutter

Slide the privacy shutter to cover the camera lens and protect your privacy when the camera is not in use.

5. Camera

Enables you to video chat, capture photos, and record videos.

6. Camera-status light

Turns on when the camera is in use.

7. Right microphone

Provides digital sound input for audio recording and voice calls.

Bottom view



Figure 6. Bottom view

1. Right speaker

Provide audio output.

2. MyDell QR code

MyDell is your hub for content that is personalized for your Dell Pro Precision 5 14 PW514261, including videos, articles, manuals, and access to support.

3. Service Tag/Express Service Code label

The Service Tag is a unique alphanumeric identifier that enables Dell service technicians to identify the hardware components in your computer and access warranty information. The Express Service Code is a numeric version of the Service Tag.

4. Air vents

Provides ventilation for your computer. Clogged air vents can cause overheating and can affect the performance of your computer and potentially cause hardware issues. Keep the air vents clear of obstructions and clean them regularly to prevent the build-up of dust and dirt. For more information about cleaning air vents, search [Dell Support Site](#).

5. Left speaker

Provide audio output.

Locate the Service Tag or Express Service Code label of your computer

The service tag is a unique alphanumeric identifier that allows Dell service technicians to identify the hardware components in your computer and access warranty information. The Express Service Code is a numeric version of the Service Tag.

For more information about how to find the Service Tag of your computer, search [Dell Support Site](#).



Figure 7. Service Tag/Express Service Code location

Battery-status light

The following table lists the battery-status light of your Dell Pro Precision 5 14 PW514261.

Table 1. Battery-status light behavior

Power source	LED behavior	System power state	Battery charge level
AC adapter	Off	S0 or S5	100%
AC adapter	Solid white	S0 or S5	< 100%
Battery	Off	S0 or S5	11-100%
Battery	Solid amber	S0 or S5	< 10%

- S0 (ON): The computer is turned on.
- S3 (Sleep): Screen is off, and the computer is in sleep mode.
- S4 (Hibernate): The computer consumes the least power in the Hibernate state than in the ON or OFF state. The computer is almost in the OFF state. The context data is written to a storage device, allowing you to resume from where you left after the computer is turned on.
- S5 (OFF): The computer is in a shutdown state.

Set up your Dell Pro Precision 5 14 PW514261

About this task

NOTE: The images in this document may differ from your computer depending on the configuration you ordered.

Steps

1. Connect the power adapter and press the power button.

NOTE: To conserve battery power, the battery might enter power-saving mode. Ensure that the power adapter is connected before turning on the computer.



Figure 8. Connect the power adapter and press the power button

2. Finish the operating system setup.

For Ubuntu:

Follow the on-screen instructions to complete the setup. For more information about installing and configuring Ubuntu, search [Dell Support Site](#).

For Windows:

Follow the on-screen instructions to complete the setup. When setting up, it is recommended that you:

- Connect to a network for Windows updates.


NOTE: If connecting to a secured wireless network, enter the password for the wireless network access when prompted.

- If connected to the Internet, sign-in with an existing Microsoft account or create an account. If not connected to the Internet, create an offline account.

- On the **Support and Protection** screen, enter your contact details.

3. Locate and use Dell apps from the Windows Start menu. This step is optional but recommended.

Table 2. Locate Dell apps

Resources	Description
	Dell Optimizer is an application that is designed to enhance computer performance and productivity by optimizing settings for power, battery, display, collaboration touchpad, and presence detection. It also provides access to applications purchased with your new computer. For more information, see Dell Optimizer User's Guide at Dell Support Site.
	Dell Product Registration Register your computer with Dell.
	Dell Help & Support Access help and support for your computer.
	SupportAssist SupportAssist is a proactive and predictive technology that offers automated technical support for Dell computers. It proactively monitors both hardware and software, addressing performance issues, preventing security threats, and automating engagement with Dell Technical Support. For more information, see the SupportAssist documentation at Dell Support Site.  NOTE: In SupportAssist, click the warranty expiry date to renew or upgrade your warranty.

Specifications of Dell Pro Precision 5 14 PW514261

Dimensions and weight

The following table lists the height, width, depth, and weight of your Dell Pro Precision 5 14 PW514261.

Table 3. Dimensions and weight

Description	Values
Front height	13.97 mm (0.55 in.)
Rear height	18.33 mm (0.72 in.)
Width	313 mm (12.32 in.)
Depth	227.3 mm (8.94 in.)
Weight  NOTE: The weight of your computer depends on the configuration that you ordered.	Minimum weight: 1.81 kg (3.98 lb)

Processor

The following table lists the details of the processors that are supported on your Dell Pro Precision 5 14 PW514261.

Table 4. Processor

Description	Option one	Option two	Option three
Type	Intel Core Ultra 5 336H	Intel Core Ultra 7 366H	Intel Core Ultra 9 386H
Wattage	65 W	80 W	80 W
Total cores	12	16	16
Number of Performance-cores	4	4	4
Number of Efficient-cores	4	8	8
Number of Low Power Efficient-cores	4	4	4
Total threads	12	16	16
Speed	Up to 4.60 GHz	Up to 4.80 GHz	Up to 4.90 GHz
Performance-core frequency			
Base frequency	1.90 GHz	2 GHz	2.10 GHz
Maximum turbo frequency	4.60 GHz	4.80 GHz	4.90 GHz
Efficient-core frequency			
Base frequency	1.50 GHz	1.60 GHz	1.60 GHz

Table 4. Processor (continued)

Description	Option one	Option two	Option three
Maximum turbo frequency	3.40 GHz	3.60 GHz	3.70 GHz
Low Power Efficient-core frequency			
Base frequency	1.50 GHz	1.60 GHz	1.60 GHz
Maximum turbo frequency	3.20 GHz	3.40 GHz	3.50 GHz
Processor cache	18 MB	18 MB	18 MB
Integrated graphics	Intel Graphics	Intel Graphics	Intel Graphics
X ^e -cores	4	4	4
Neural Processing Unit (NPU) AI performance	Up to 50 TOPS	Up to 50 TOPS	Up to 50 TOPS
 NOTE: Tera Operations Per Second (TOPS) is an AI performance metric that measures how many trillions of operations per second an AI processor can perform.			

Chipset

The following table lists the details of the chipset that is supported by your Dell Pro Precision 5 14 PW514261.

Table 5. Chipset

Description	Values
Chipset	Integrated with the processor
Processor	- Intel Core Ultra 5 Processor 336H - Intel Core Ultra 7 Processor 366H - Intel Core Ultra 9 Processor 386H
DRAM bus width	64-bit
Flash EPROM	Up to 64 MB
PCIe bus	Up to Gen5

Operating system

Your Dell Pro Precision 5 14 PW514261 supports the following operating systems:

- Windows 11 Home
- Windows 11 Pro
- Ubuntu Linux 24.04 LTS

Memory

The following table lists the memory specifications that are supported by your Dell Pro Precision 5 14 PW514261.

Table 6. Memory specifications

Description	Values
Memory slots	LPCAMM2 slots

Table 6. Memory specifications (continued)

Description	Values
Memory type	LPCAMM DDR5x
Memory speed	8533 MT/s
Maximum memory configuration	64 GB
Minimum memory configuration	16 GB
Memory size per slot	16 GB, 32 GB, or 64 GB
Memory configurations supported	16 GB: 1 x 16 GB, LPCAMM DDR5x, 8533 MT/s, dual-channel 32 GB: 1 x 32 GB, LPCAMM DDR5x, 8533 MT/s, dual-channel 64 GB: 1 x 64 GB, LPCAMM DDR5x, 8533 MT/s, dual-channel

External ports and slots

The following table lists the external ports and slots on your Dell Pro Precision 5 14 PW514261.

Table 7. External ports and slots

Description	Values
Network port	One RJ45 ethernet port (10 Gbps)
USB ports	- Two Thunderbolt 4 (40 Gbps) ports with Power Delivery and DisplayPort - One USB 3.2 Gen 1 (5 Gbps) port with PowerShare - One USB 3.2 Gen 1 (5 Gbps) port
Audio port	One global headset jack
Video port(s)	- Two Thunderbolt 4 (40 Gbps) ports with Power Delivery and DisplayPort - One HDMI 2.1 port
Media-card reader	One optional smart-card reader slot
Power-adaptor port	Supported via two Thunderbolt 4 (40 Gbps) ports with Power Delivery and DisplayPort
Security-cable slot	One wedge-shaped lock slot

Internal slots

The following table lists the internal slots of your Dell Pro Precision 5 14 PW514261.

Table 8. Internal slots

Description	Values
M.2	One M.2 Key-M (2230/2280) slot for solid-state drive

Table 8. Internal slots

Description	Values
	 NOTE: To learn more about the features of different types of M.2 cards, search Dell Support Site .

Ethernet

The following table lists the wired Ethernet Local Area Network (LAN) specifications of your Dell Pro Precision 5 14 PW514261.

Table 9. Ethernet specifications

Description	Values
Model	- Intel I219-LM for vPro configurations - Intel I219-V for non-vPro configurations
Transfer rate	10/100/1000 Mbps

Wireless module

The following table lists the Wireless Local Area Network (WLAN) module that is supported on your Dell Pro Precision 5 14 PW514261.

Table 10. Wireless module specifications

Description	Values
Model number	Intel BE211
Transfer rate	5760 Mbps
Frequency bands supported	2.4 GHz 5 GHz 6 GHz
Wireless standards	- Wi-Fi 802.11a/b/g - Wi-Fi 4 (Wi-Fi 802.11n) - Wi-Fi 5 (Wi-Fi 802.11ac) - Wi-Fi 6E (Wi-Fi 802.11ax) - Wi-Fi 7 (Wi-Fi 802.11be)
Encryption	64-bit/128-bit WEP 128-bit AES-CCMP 256-bit AES-GCMP
Bluetooth wireless card  NOTE: The functionality of the Bluetooth wireless card may vary based on the operating system.	Bluetooth 6.0 wireless card

Audio

The following table lists the audio specifications of your Dell Pro Precision 5 14 PW514261.

Table 11. Audio specifications

Description	Values
Audio controller	Realtek ALC3333
Stereo conversion	Supported
Internal audio interface	SoundWire interface
External audio interface	One global headset port
Number of speakers	Two
Internal-speaker amplifier	Supported
External volume controls	Keyboard shortcut controls
Speaker output:	
Average	4 W
Peak	5 W
Microphone	Dual-array digital microphones

Storage

This section lists the storage options on your Dell Pro Precision 5 14 PW514261.

Your Dell Pro Precision 5 14 PW514261 supports one of the following storage configurations: One M.2 2230/M.2 2280 solid-state drive

Table 12. Storage specifications

Storage type	Interface type	Capacity
M.2 2230 solid state drive	PCIe Gen 4 x4 NVMe	256 GB, 512 GB or 1 TB
M.2 2280 solid state drive, Self-Encrypting	PCIe Gen 5 x4 NVMe	1 TB or 2 TB

Keyboard

The following table lists the keyboard specifications of your Dell Pro Precision 5 14 PW514261.

Table 13. Keyboard specifications

Description	Values
Keyboard type	• Magnetite, Standard AI hotkey backlit keyboard • Magnetite, Standard AI hotkey non-backlit keyboard
Keyboard layout	QWERTY

Table 13. Keyboard specifications (continued)

Description	Values
Number of keys	79 keys (Arabic, Canadian [Bilingual], Chinese [Traditional], English International, English US, French Canadian, Greek, Hebrew, Korean, Russian, Thai, Ukrainian) 80 keys (Belgian, Bulgarian, Czech/Slovak [MUI], Danish, English UK, Estonian, French European, German, Hungarian, Icelandic, Italian, Nordic MUI, Norwegian, Portuguese [Iberian], Slovenian, Spanish, Swedish/Finnish, Swiss European, Turkish) 81 keys (Portuguese [Brazil]) 83 keys (Japanese)
Key pitch	Horizontal = 18.05 mm Vertical = 18.05 mm
Keyboard shortcuts	Some keys on your keyboard have two symbols on them. These keys can be used to type alternate characters or to perform secondary functions. - To type the alternate character, press Shift and the desired key. - To perform secondary functions, press Fn and the desired key.  NOTE: You can define the primary behavior of the function keys (F1–F12) by changing Function Key Behavior in the BIOS Setup program.  NOTE: If Copilot in Windows is not available on your computer, pressing the Copilot key launches Windows search. For more information about Copilot in Windows, search Dell Support site.

Keyboard shortcuts

 **NOTE:** Keyboard characters may differ depending on the keyboard language configuration. Keys that are used for shortcuts remain the same across all language configurations.

Some keys on your keyboard have two symbols on them. These keys can be used to type alternate characters or to perform secondary functions. The symbol that is shown on the lower part of the key refers to the character that is typed out when the key is pressed. If you press shift and the key, the symbol that is shown on the upper part of the key is typed out. For example, if you press **2**, **2** is typed out; if you press **Shift + 2**, **@** is typed out.

The keys F1-F12 at the top row of the keyboard are function keys for multimedia control, as indicated by the icon at the bottom of the key. Press the function key to invoke the task represented by the icon. For example, pressing F1 mutes the audio (refer to the table below).

However, if the function keys F1-F12 are needed for specific software applications, multimedia functionality can be disabled by pressing **Fn + Esc**. Subsequently, multimedia control can be invoked by pressing **Fn** and the respective function key. For example, mute audio by pressing **Fn + F1**.

 **NOTE:** You can also define the primary behavior of the function keys (F1–F12) by changing **Function Key Behavior** in BIOS setup program.

Table 14. Function key primary behavior

Function key	Primary behavior
F1	Mute or unmute audio
F2	Decrease volume
F3	Increase volume

Table 14. Function key primary behavior (continued)

Function key	Primary behavior
F4	Microphone Mute
F5	Keyboard Illumination/Backlight
F6	Decrease brightness
F7	Increase brightness
F8	Switch to external display
F10	Print screen
F11	Home
F12	End

The **Fn** key is also used with selected keys on the keyboard to invoke secondary functions.

Table 15. Secondary behavior

Function key	Secondary behavior
Fn + F1	Operating system and application-specific F1 behavior
Fn + F2	Operating system and application-specific F2 behavior
Fn + F3	Operating system and application-specific F3 behavior
Fn + F4	Operating system and application-specific F4 behavior
Fn + F5	Operating system and application-specific F5 behavior
Fn + F6	Operating system and application-specific F6 behavior
Fn + F7	Operating system and application-specific F6 behavior
Fn + F8	Operating system and application-specific F8 behavior
Fn + F9	Operating system and application-specific F9 behavior
Fn + F10	Operating system and application-specific F10 behavior
Fn + F11	Operating system and application-specific F11 behavior
Fn + F12	Operating system and application-specific F12 behavior
Fn + Ctrl	Open the application menu
Fn + Esc	Toggle between multimedia and function key behavior
Fn + PgUp	Scroll up the document or page
Fn + PgDn	Scroll down the document or page
Fn + Home	Move to the beginning of the document
Fn + End	Move to the end of the document
Copilot	Launch Copilot in Windows NOTE: If Copilot in Windows is not available on your computer, the Copilot key launches Recall. If both Recall and Copilot in Windows are not available on your computer, the Copilot key launches Windows Search. For more information about Copilot in Windows and Recall, search in the Knowledge Base Resource at the Dell Support Site.

Camera

The following table lists the camera specifications of your Dell Pro Precision 5 14 PW514261.

Table 16. Camera specifications

Description	Option one	Option two
Number of cameras	One	One
Camera type	FHD+ RGB HDR camera	8MP HDR + IR camera
Camera location	Front	Front
Camera sensor type	CMOS sensor technology	CMOS sensor technology
Camera resolution:		
Still image	2.07 megapixel	8.29 megapixel
Video	1920 x 1080 (FHD) at 30 fps	2560 x 1440 (QHD) at 30 fps
Infrared camera resolution:		
Video	Not applicable	480 x 360 at 15 fps
Diagonal viewing angle:		
Camera	80.2 degrees	88.10 degrees
Infrared camera	Not applicable	86.60 degrees

Touchpad

The following table lists the touchpad specifications of your Dell Pro Precision 5 14 PW514261.

Table 17. Touchpad specifications

Description	Values
Touchpad resolution:	
Horizontal	>=300 DPI
Vertical	>=300 DPI
Touchpad dimensions:	
Horizontal	125 mm (4.92 in.)
Vertical	88 mm (3.46 in.)
Touchpad gestures	For more information about the touchpad gestures that are available on: - Windows, search Microsoft Support Site. - Ubuntu, search Ubuntu Support Site.

Power adapter

The following table lists the power adapter specifications of your Dell Pro Precision 5 14 PW514261.

Table 18. Power-adapter specifications

Description	Option one	Option two
Type	65 W AC adapter, USB Type-C	100 W AC adapter, USB Type-C
Power-adapter dimensions:		
Height	28 mm (1.10 in.)	26.50 mm (1.04 in.)
Width	51 mm (2.01 in.)	60 mm (2.36 in.)
Depth	112 mm (4.41 in.)	122 mm (4.80 in.)
Input voltage	100 VAC - 240 VAC	100 VAC - 240 VAC
Input frequency	50 Hz - 60 Hz	50 Hz - 60 Hz
Input current (maximum)	1.70 A	1.70 A
Output current (continuous)	20 V/3.25 A 15 V/3 A 9 V/3 A 5 V/3 A	20 V/5 A 15 V/3 A 9 V/3 A 5 V/3 A
Rated output voltage	20 VDC 15 VDC 9 VDC 5 VDC	20 VDC 15 VDC 9 VDC 5 VDC
Temperature range:		
Operating	0°C to 40°C (32°F to 104°F)	0°C to 40°C (32°F to 104°F)
Storage	-40°C to 70°C (-40°F to 158°F)	-40°C to 70°C (-40°F to 158°F)
 CAUTION: Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components.		

Power adapter requirements

 **NOTE:** If you did not purchase the Dell-branded power adapter that is recommended for your computer, ensure that the power adapter you use meets the following requirements.

The following table lists the power adapter requirements for your Dell Pro Precision 5 14 PW514261.

Table 19. Power adapter requirements

Description	Value
Power that is required from a power adapter to achieve optimal performance.	65 W
Power that charges the computer at a slower speed.  NOTE: A warning message may appear informing you about the use of a lower-powered adapter and slower charging speed.	Less than 60 W
Minimum power that is required from a power adapter to operate the computer and charge the battery.	27 W

Table 19. Power adapter requirements (continued)

Description	Value
 NOTE: A warning message appears informing you about the use of a lower-powered adapter and slower charging speed.	
USB Power Delivery (PD) fast charging	Supported
ExpressCharge mode	Supported  NOTE: Ensure that the computer with a 45 Wh battery is connected to a 65 W power adapter for this feature to be supported.

Table 20. Power adapter requirements

Description	Value
Power that is required from a power adapter to achieve optimal performance.	100 W
Power that charges the computer at a slower speed.  NOTE: A warning message may appear informing you about the use of a lower-powered adapter and slower charging speed.	Less than 100 W
Minimum power that is required from a power adapter to operate the computer and charge the battery.  NOTE: A warning message appears informing you about the use of a lower-powered adapter and slower charging speed.	45 W
USB Power Delivery (PD) fast charging	Supported
ExpressCharge mode	Supported  NOTE: Ensure that the computer with a 64 Wh battery is connected to a 100 W power adapter for this feature to be supported.  NOTE: Ensure that the computer with a 96 Wh battery is connected to a 130 W power adapter for this feature to be supported.

Battery

The following table lists the battery specifications of your Dell Pro Precision 5 14 PW514261.

Table 21. Battery specifications

Description	Values
Battery type	4-cell, 72 Wh, Lithium Ion Polymer, Standard Life, ExpressCharge
Battery voltage	15.60 VDC
Battery weight (maximum)	0.27 kg (0.60 lb)
Battery dimensions:	
Height	7.64 mm (0.30 in.)
Width	266.62 mm (10.45 in.)
Depth	72.68 mm ((2.86 in.)
Temperature range:	

Table 21. Battery specifications (continued)

Description	Values
Operating	- Charge: 0°C to 50°C (32°F to 122°F) - Discharge: 0°C to 60°C (32°F to 140°F)
Storage	-20°C to 65°C (-40°F to 149°F)
Battery operating time	Varies depending on operating conditions and can significantly reduce under certain power-intensive condition.
Battery charging time (approximate)	3 hours (when the computer is turned off)
 NOTE: You can control the charging time, duration, start and end time, and so on, using the Dell Power Manager application. For more information about Dell Power Manager, search Dell Support Site .	
Coin-cell battery	Not applicable
 CAUTION: Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components.	
 CAUTION: Dell Technologies recommends that you charge the battery regularly for optimal power consumption.	

Display

The following table lists the display specifications of your Dell Pro Precision 5 14 PW514261.

Table 22. Display specifications

Description	Option one	Option two	Option three
Display type	14" Full High Definition Plus (FHD+)	14" Full High Definition Plus (FHD+)	14" Quad High Definition Plus (QHD+), ComfortView Plus
Touch options	Not supported	Supported	Not supported
Display-panel technology	Wide-viewing Angle (WVA)	Wide-viewing Angle (WVA)	Wide-viewing Angle (WVA)
Display-panel dimensions (active area):			
Height	188.50 mm (7.42 in.)	188.50 mm (7.42 in.)	188.50 mm (7.42 in.)
Width	301.59 mm (11.87 in.)	301.59 mm (11.87 in.)	301.59 mm (11.87 in.)
Diagonal	355.65 mm (14 in.)	355.65 mm (14 in.)	355.65 mm (14 in.)
Display-panel native resolution	1920 x 1200	1920 x 1200	2560 x 1600
Luminance (typical)	400 nits	400 nits	400 nits
Megapixels	2.3	2.3	4.1
Color gamut	45% NTSC	100% sRGB	100% sRGB
Pixels Per Inch (PPI)	162	162	215
Contrast ratio (typical)	800:1	800:1	1200:1
Response time (maximum)	35 ms	35 ms	35 ms
Refresh rate	60 Hz	60 Hz	120 Hz
Horizontal view angle	- Minimum: 80 +/- degrees - Typical: 85 +/- degrees	- Minimum: 80 +/- degrees - Typical: 85 +/- degrees	- Minimum: 80 +/- degrees - Typical: 85 +/- degrees
Vertical view angle	Minimum: 80 +/- degrees	Minimum: 80 +/- degrees	Minimum: 80 +/- degrees

Table 22. Display specifications (continued)

Description	Option one	Option two	Option three
	• Typical: 85 +/- degrees	• Typical: 85 +/- degrees	• Typical: 85 +/- degrees
Pixel pitch	0.157 x 0.157	0.157 x 0.157	0.117 x 0.117
Power consumption (maximum)	3.68 W	4.40 W	4.63 W
Anti-glare vs glossy finish	Anti-glare	Anti-glare	Anti-glare

Fingerprint reader (optional)

The following table lists the specifications of the optional fingerprint-reader of your Dell Pro Precision 5 14 PW514261.

Table 23. Fingerprint reader specifications

Description	Values
Sensor technology	Capacitive sensing
Sensor resolution	500 dpi
Sensor pixel size	108 mm x 88 mm

GPU—Integrated

The following table lists the specifications of the integrated Graphics Processing Unit (GPU) supported by your Dell Pro Precision 5 14 PW514261.

Table 24. GPU—Integrated

Controller	Memory size	Processor
Intel Graphics	Shared system memory	- Intel Core Ultra 5 Processor 336H - Intel Core Ultra 7 Processor 366H - Intel Core Ultra 9 Processor 386H

GPU—Discrete

The following table lists the specifications of the discrete Graphics Processing Unit (GPU) supported by your Dell Pro Precision 5 14 PW514261.

Table 25. GPU—Discrete

Controller	Memory size	Memory type
NVIDIA RTX Pro 500 Blackwell	6 GB	GDDR7

Multiple display support matrix

The following table lists the multiple display support matrix for your Dell Pro Precision 5 14 PW514261.

Table 26. Multiple display support matrix

Graphics Card	Direct Graphics Controller Direct Output Mode	Supported external displays with computer internal display on	Supported external displays with computer internal display off
Intel Graphics	Not supported	3	4
NVIDIA Graphics	Not supported	3	4

Hardware security

The following table lists the hardware security of your Dell Pro Precision 5 14 PW514261.

Table 27. Hardware security

Hardware security
One wedge-shaped lock slot
Windows Hello - Fingerprint Reader (optional)
Trusted Platform Module TPM 2.0
FIPS 140-2 certification for TPM
TCG Certification for TPM (Trusted Computing Group)
Finger Print Reader in Power Button available with and without ControlVault 3 Plus
ControlVault 3 Plus Advanced Authentication with FIPS 140-3 Level 3 Certification
Contacted Smart Card and ControlVault 3 Plus
Contactless Smart Card, NFC, and ControlVault 3 Plus
SED SSD NVMe, SSD per SDL

Smart-card reader

Contacted smart-card reader

The following table lists the contacted smart-card reader specifications of your Dell Pro Precision 5 14 PW514261.

Table 28. Contacted smart-card reader specifications

Capability	Description
ISO 7816 -3 Class A Card Support	Reader capable of reading 5 V powered smart card
ISO 7816 -3 Class B Card Support	Reader capable of reading 3 V powered smart card
ISO 7816 -3 Class C Card support	Reader capable of reading 1.8 V powered smart card
ISO 7816-1 Compliant	Specification for the reader
ISO 7816 -2 Compliant	Specification for smart card device physical characteristics (size, location of connection points, and so on)
T=0 support	Cards support character-level transmission

Table 28. Contacted smart-card reader specifications (continued)

Capability	Description
T=1 support	Cards support block-level transmission
EMVCo Compliant	Compliant with EMVCo (for electronic payment standards) smart card standards published to EMVCo Site
EMVCo Certified	Formally certified based on EMVCO smart card standards
PC/SC operating system interface	Personal Computer or Smart Card specification for integration of hardware readers into personal computer environments
CCID driver compliance	Common driver support for Integrated Circuit Card Interface Device for OS level drivers
Windows Certified	Device certified by Microsoft WHCK
FIPS 201 (PIV/HSPD-12) Compliant via GSA	Device compliant with FIPS 201/PIV/HSPD-12 requirements
FIDO2 compliance	Dell ControlVault 3 Smart-card reader is compliant with the FIDO SPEC

Contactless smart-card reader

This section lists the contactless smart-card reader specifications of your Dell Pro Precision 5 14 PW514261.

Table 29. Contactless smart-card reader specifications

Capability	Description
FeliCa Card Support	Reader and software capable of supporting FeliCa contactless cards
ISO 14443 Type A Card Support	Reader and software capable of supporting ISO 14443 Type A contactless cards
ISO 14443 Type B Card Support	Reader and software capable of supporting ISO 14443 Type B contactless cards
ISO/IEC 21481	Reader and software capable of supporting ISO/IEC 21481 compliant contactless cards and tokens
ISO/IEC 18092	Reader and software capable of supporting ISO/IEC 18092 compliant contactless cards and tokens
ISO 15693 Card Support	Reader and software capable of supporting ISO 15693 contactless cards
NFC Tag Support	Supports reading and processing of NFC compliant tag information
NFC Reader Mode	Support for NFC Forum Defined Reader mode
NFC Writer Mode	Support for NFC Forum Defined Writer mode
NFC Peer-to-Peer Mode	Support for NFC Forum Defined Peer-to-Peer mode
EMVCo Compliant	Compliant with EMVCO smart card standards as published to EMVCo Site
EMVCo Certified	Formally certified based on EMVCO smart card standards
NFC Proximity OS Interface	Enumerates NFP (Near Field Proximity) device for operating system to utilize
PC/SC OS interface	Personal Computer/Smart Card specification for integration of hardware readers into personal computer environments

Table 29. Contactless smart-card reader specifications (continued)

Capability	Description
CCID driver compliance	Common driver support for Integrated Circuit Card Interface Device for operating system level drivers
Windows Certified	Device compatible with Windows operating systems
Dell ControlVault support	The device connects to Dell ControlVault for usage and processing
FIDO2 compliance	Dell ControlVault 3 Smart-card reader is compliant with the FIDO SPEC

Table 30. Supported cards

Manufacturer	Card
HID	jCOP readertest3 A card (14443a)
	1430 1L
	DESFire D8H
	iClass (Legacy)
	iClass SEOS
NXP/MIFARE	MIFARE DESFire 8K White PVC Cards
	MIFARE Classic 1K White PVC Cards
	NXP MIFARE Classic S50 ISO Card
G&D	idOnDemand - SCE3.2 144K
	SCE6.0 FIPS 80K Dual+ 1 K Mifare
	SCE6.0 nonFIPS 80K Dual+ 1 K Mifare
	SCE6.0 FIPS 144K Dual + 1K Mifare
	SCE6.0 nonFIPS 144K Dual + 1 K Mifare
	SCE7.0 FIPS 144K
Oberthur	idOnDemand - OCS5.2 80K
	ID-One Cosmo 64 RSA D V5.4 T = 0 card

Operating and storage environment

This table lists the operating and storage specifications of your Dell Pro Precision 5 14 PW514261.

Airborne contaminant level: G1 as defined by ISA-S71.04-1985

Table 31. Computer environment

Description	Operating	Storage
Temperature range	0°C to 35°C (32 °F to 95°F)	-40°C to 65°C (-40°F to 149°F)
Relative humidity (maximum)	10% to 90% (non-condensing)	0% to 95% (non-condensing)
Vibration (maximum)*	0.66 GRMS	1.30 GRMS
Shock (maximum)	110 G†	160 G†

Table 31. Computer environment (continued)

Description	Operating	Storage
Altitude range	-15.2 m to 3048 m (-49.87 ft to 10,000 ft)	-15.2 m to 10,668 m (-49.87 ft to 35,000 ft)
 CAUTION: Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components.		

* Measured using a random vibration spectrum that simulates the user environment.

† Measured using a 2 ms half-sine pulse.

ComfortView Plus

 **WARNING:** Prolonged exposure to blue light from the display may lead to long-term effects such as eye strain, eye fatigue, or damage to the eyes.

Blue light is a color in the light spectrum which has a short wavelength and high energy. Chronic exposure to blue light, particularly from digital sources may disrupt sleep patterns and cause long-term effects such as eye strain, eye fatigue, or damage to the eyes.

The display on this computer is designed to minimize blue light and complies with TÜV Rheinland's requirement for low blue light displays.

Low blue light mode is enabled at the factory, so no further configuration is necessary.

To reduce the risk of eye strain, it is also recommended that you:

- Position the display at a comfortable viewing distance between 20 inches and 28 inches (50 cm and 70 cm) from your eyes.
- Blink frequently to moisten your eyes, wet your eyes with water, or apply eye drops.
- Take an extended break for 20 minutes every two hours.
- Look away from your display, and gaze at a distant object at 20 ft (609.60 cm) away for at least 20 seconds during each break.

Dell Optimizer

Dell Optimizer is an AI-based software application that allows you to customize your computer settings for power and battery, and more.

For Dell Pro Precision 5 14 PW514261 with Dell Optimizer, you can:

- Extend the battery life of your computer with Intelligent Battery Extender and Dynamic Charge.
- Tune the performance, power consumption, cooling, and fan noise with selectable thermal modes.
- Access and secure your computer depending on your physical presence.
- Download and redeem the apps that are purchased with your computer.

For more information about configuring and using these features, search for *Dell Optimizer* at the [Dell Support Site](#).

Dell support policy

For information about Dell support policy, search [Dell Support Site](#).

Getting help and contacting Dell

Self-help resources

You can get information and help on Dell products and services using these self-help resources:

Table 32. Self-help resources

Self-help resources	Resource location
Information about Dell products and services	Dell Site
Contact Support	In Windows search, type <code>Contact Support</code> , and press Enter.
Online help for operating system	Windows Support Site Linux Support Site
Access top solutions, diagnostics, drivers and downloads, and learn more about your computer through videos, manuals, and documents.	Your Dell computer is uniquely identified using a Service Tag or Express Service Code. To view relevant support resources for your Dell computer, enter the Service Tag or Express Service Code at Dell Support Site . For more information about how to find the Service Tag for your computer, see Locate the Service Tag on your computer .
Dell knowledge base articles	1. Go to Dell Support Site. 2. On the menu bar at the top of the Support page, select Support > Support Library. 3. In the Search field on the Support Library page, type the keyword, topic, or model number, and then click or tap the search icon to view the related articles.

Contacting Dell

To contact Dell for sales, technical support, or customer service issues, see [Contact Support at Dell Support Site](#).

 **NOTE:** Availability of the services may vary depending on the country or region, and product.

 **NOTE:** If you do not have an active Internet connection, you can find contact information in your purchase invoice, packing slip, bill, or Dell product catalog.

Revision history

Tracks all updates that are made to the document. It typically includes the date of change, version number, and a brief description of the modification. This log helps maintain transparency, accountability, and a clear timeline of progress.

Table 33. Revision history

Revision	Date	Description
A00	May 2026	Original publish date.