

### Overview


**Shape the Future of QuickSpecs – Your Input Matters**

### HPE Networking Comware Switch Series 5960

The HPE Networking Comware Switch Series 5960 are high-density, high-performance top-of-rack (ToR) switches suited for deployment at the core and aggregation layer of enterprise data centers, large cloud service providers, and telco environments.

These switches offer multiple connectivity options with high-density 400G connectivity and are backward compatible with the widely used 100G QSFP28 ports. Switching capacity of 12.8 Tbps and redundant hot-swappable power supplies offer exceptional performance with improved power savings. VXLAN/EVPN and DRNI lead to improved scalability and resiliency. Enhanced software features such as SR-MPLS running with the latest OS Comware v9 enables a dynamic and highly available network.

HPE Intelligent Management Center (IMC) support on these switches provides a consistent network manageability experience through centralized configuration, compliance, policy management, monitoring, and troubleshooting. The HPE Networking Comware Switch Series 5960 also supports HPE IMC Orchestrator and Analyzer for DC fabric orchestration and application telemetry.

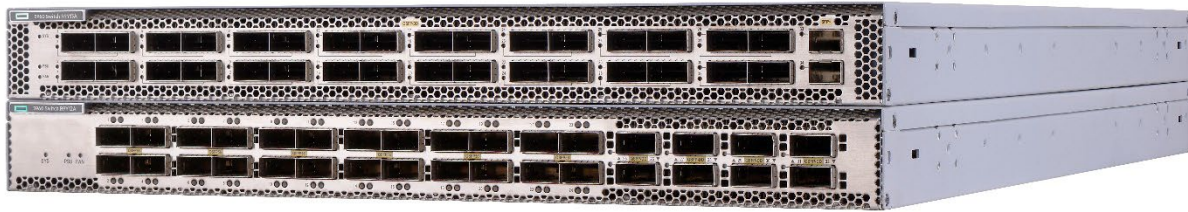

### HPE Networking Comware 5960 Switch Series

#### Key features

- High-performance, high-density, and backward-compatible switch with varied 400/200/100G connectivity options
- New-generation OS Comware v9 offering enhanced software features such as Segment Routing MPLS, egress ACL, egress rate limiting, and others for highly distributed environments
- Dual, redundant, hot-swappable power supplies maintain a dynamic and highly available network
- Supports HPE IMC for a consistent network manageability experience; integrates with HPE IMC Orchestrator and Analyzer for DC fabric orchestration, monitoring, and application telemetry

## Standard Features

### Features and Benefits

Consistent and advanced data center switches with flexible connectivity options

- The HPE Networking Comware Switch Series 5960 offers multiple connectivity options of 25/40/100/200/400G with three SKUs
  - A high-density 32 x 400GbE QSFP-DD switch
  - A highly flexible 24x100/200G + 8x400G QSFP-DD switch that is backward compatible with the widely used 100G QSFP28 ports
  - A high-density 48x100G 6 QSFP-DD switch
- Supports new-generation OS Comware v9 offering enhanced features such as SR-MPLS, SRv6, and others for highly distributed environments built on a modular and open architecture; supports containerized deployment; can run third-party software applications
- VXLAN/EVPN for network virtualization and overlay solutions for improved flexibility
- Supports DRNI that combines multiple physical switches into one virtual distributed-relay (DR) system for doubling aggregate bandwidth, fast forwarding, resiliency, and high availability

### High-Performance Data Center Switching

- The HPE Networking Comware Switch Series 5960 supports redundant, hot-swappable power modules and varied fan speeds to meet the actual demands, thereby, ensuring a dynamic and highly available network
- Delivers up to 25.6 Tbps switching capacity for demanding data center applications
- Low latency, under 1  $\mu$ s delivering increased network throughput
- Uses programmable chips that improve flexibility and aid in network expansion by defining forwarding logic and developing new features as per user needs through simple software upgrades
- HPE Networking Comware 5960R is a router switch for border leaf or DCI connection with MACsec security connection.
- HPE Networking Comware 5960R series switches support 400G 120km ZR+ transceiver, which is suitable for DCI connection scenarios, and can partially replace the transmission equipment through the ZR+ module, which is more convenient to manage.

### Rich Quality of Service (QoS) Features

- The HPE Networking Comware Switch Series 5960 support Layer 2 to Layer 4 packet filtering for traffic classification based on source MAC address, destination MAC address, source IP address, destination IP address, TCP/UDP port number, protocol type, and VLAN
- Supports committed access rate (CAR) and line rate for anomaly detection and troubleshooting
- Provides extensive traffic prioritization with strict priority (SP) queuing, weighted round robin (WRR), SP+WRR, WFQ, and SP+WFQ

### Segment Routing

- SRv6 is a future-oriented new-generation protocol. It naturally supports IPv6 and satisfies access to massive address spaces. SRv6 can identify applications and tenants, realize intelligent routing based on index such as delay and bandwidth, and ensure SLA. At the same time, SRv6 implements a unified protocol, which simplifies configuration.
- SRv6 uses segments with a length of 128 bits to define network functions, and then by arranging the segments, a series of forwarding and processing behaviors of network devices can be implemented to complete service orchestration. Compared with MPLS SR protocol, it has stronger scalability and better compatibility with SDN controller, which is more conducive to deploying applications in DCI, MAN and other scenarios.
- The notable feature of SRv6 is that the forwarding plane adopts IPV6. Based on the reachability of IPV6, it is easier to realize the interconnection of different networks. SRv6 is used for forwarding within a domain, and only ordinary IPV6 forwarding is required between domains. It does not need to be like MPLS which needs to convert MPLS to IP and do a lot of complicated configurations.



## Standard Features

### Improved Visibility and Simplified Management

- The HPE Networking Comware Switch Series 5960 supports operations, administration, and maintenance (OAM) for improved manageability
  - These switches can send real-time information, statistics, and RDMA notifications to the data center operation and maintenance platform through ERSPAN and gRPC protocols, thereby, enabling improved visibility
  - Supports real-time analysis, troubleshooting, and risk warning to improve network performance and ensure business continuity
  - Uses multiple access methods including SNMPv1/v2c/v3, Telnet, SSH 2.0, SSL, and FTP to monitor essential network functions; and supports events, alarm, history, and statistics group plus a private alarm extension group
  - Supports centralized configuration, compliance and policy management, monitoring, and troubleshooting with HPE IMC to provide a consistent network manageability experience; for DC fabric orchestration and application telemetry, this switch supports HPE IMC Orchestrator and Analyzer
- 



## Configuration Information

### BTO Models

#### BTO Switch Enclosures

Rule #	Description	SKU
3, 6, 8, 9, 10	<p>HPE Networking Comware Data Center Switch 48p QSFP28 100G 6p QSFP-DD 400G 5960R</p> <ul style="list-style-type: none"> <li>• 48 QSFP+/QSFP28 40/100G ports (min=0 \ max=48)</li> <li>• 6 QSFP28/QSFP-DD 100G/400G ports (min=0 \ max=6)</li> <li>• 1 RJ45 Management Port</li> <li>• 1 Console port</li> <li>• 1 USB2.0 port</li> <li>• 2 Power Supply Slots (Min 1 required)</li> <li>• 6 Fan Tray Slots (Min 6 required)</li> <li>• 2U - Height</li> </ul>	S4J82A
3, 4, 5, 6, 7, 8, 9	<p>HPE Networking Comware Data Center Switch 24-port 100/200G QSFP56 8-port 400G QSFP-DD 5960</p> <ul style="list-style-type: none"> <li>• 24 QSFP+/QSFP28 40/100G ports (min=0 \ max=24)</li> <li>• 8 QSFP28/QSFP-DD 100G/400G ports (min=0 \ max=8)</li> <li>• 1 RJ45 Management Port</li> <li>• 1 Console port</li> <li>• 1 USB2.0 port</li> <li>• 2 Power Supply Slots (Min 1 required)</li> <li>• 6 Fan Tray Slots (Min 6 required)</li> <li>• 1U - Height</li> </ul>	R9Y12A
1, 2, 3, 4, 5, 7, 8, 9	<p>HPE Networking Comware Data Center Switch 32-port 400G QSFP-DD 5960</p> <ul style="list-style-type: none"> <li>• 32 QSFP+/ QSFP28/QSFP-DD 40G/100G/400G ports (min=0 \ max=32)</li> <li>• 2 SFP/SFP+ 1/10G ports (min=0 \ max=2)</li> <li>• 1 RJ45 Management Port</li> <li>• 1 Console port</li> <li>• 1 USB2.0 port</li> <li>• 2 Power Supply Slots (Min 1 required)</li> <li>• 6 Fan Tray Slots (Min 6 required)</li> <li>• 1U - Height</li> </ul>	R9Y13A
Rule #	Description	
1	<p><b>The following SFP Transceivers install into this switch's Management Port and SFP+ Ports: (Use BTO only when adding to switch)</b></p> <p>HPE Networking X120 1G SFP LC SX Transceiver JD118B</p> <p>HPE Networking X120 1G SFP LC LX Transceiver JD119B</p> <p>HPE Networking X120 1G SFP RJ45 T Transceiver JD089B</p> <p>HPE Networking X120 1G SFP LC LH100 Transceiver JD103A</p>	
2	<p><b>The following SFP+ Transceivers install into this Switch: (Use BTO only when adding to switch)</b></p> <p>HPE Networking X130 10G SFP+ LC BiDi 10km-Uplink Transceiver JL737A</p> <p>HPE Networking X130 10G SFP+ LC BiDi 10km-Downlink Transceiver JL738A</p> <p>HPE Networking X130 10G SFP+ LC BiDi 40km-Uplink Transceiver JL739A</p> <p>HPE Networking X130 10G SFP+ LC BiDi 40km-Downlink Transceiver JL740A</p> <p>HPE Networking X130 10G SFP+ LC SR Transceiver JD092B</p> <p>HPE Networking X130 10G SFP+ LC LR Transceiver JD094B</p> <p>HPE Networking X130 10G SFP+ LC LH 80km Transceiver JG915A</p> <p>HPE Networking X2A0 10G SFP+ to SFP+ 7m Active Optical Cable JL290A</p> <p>HPE Networking X2A0 10G SFP+ to SFP+ 10m Active Optical Cable JL291A</p> <p>HPE Networking X2A0 10G SFP+ to SFP+ 20m Active Optical Cable JL292A</p>	

## Configuration Information

	HPE Networking X240 10G SFP+ SFP+ 0.65m DAC Cable	JD095C
	HPE Networking X240 10G SFP+ SFP+ 1.2m DAC Cable	JD096C
	HPE Networking X240 10G SFP+ SFP+ 3m DAC Cable	JD097C
	HPE Networking X240 10G SFP+ SFP+ 5m DAC Cable	JG081C
3	<b>The following QSFP+ Transceivers install into this Switch: (Use BTO only when adding to switch)</b>	
	HPE Networking X140 40G QSFP+ MPO SR4 Transceiver	JG325B
	HPE Networking X140 40G QSFP+ CSR4 300m Transceiver	JG709A
	HPE Networking X140 40G QSFP+ LC BiDi 100m MM Transceiver	JL251A
	HPE Networking X140 40G QSFP+ LC LR4 SM 10km 1310nm Transceiver	JG661A
	HPE Networking X140 40G QSFP+ LC LR4L 2km SM Transceiver	JL286A
	HPE Networking X140 40G QSFP+ LC ER4 40km SM Transceiver	JL306A
	HPE Networking Comware 40G PLR4 QSFP+ 10km Transceiver	S4J93A
	HPE Networking X2A0 40G QSFP+ to QSFP+ 7m Active Optical Cable	JL287A
	HPE Networking X2A0 40G QSFP+ to QSFP+ 10m Active Optical Cable	JL288A
	HPE Networking X2A0 40G QSFP+ to QSFP+ 20m Active Optical Cable	JL289A
	HPE Networking Comware X240 40G QSFP+ QSFP+ 1m Direct Attach Copper Cable	JG326A
	HPE Networking Comware X240 40G QSFP+ QSFP+ 3m Direct Attach Copper Cable	JG327A
	HPE Networking Comware X240 40G QSFP+ QSFP+ 5m Direct Attach Copper Cable	JG328A
4	<b>The following QSFP28 Transceivers install into this Switch: (Use BTO only when adding to switch)</b>	
	HPE Networking X150 100G QSFP28 PSM4 500m SM Transceiver	JH420A
5	<b>The following QSFP28 Transceivers install into this Switch: (Use BTO only when adding to switch)</b>	
	HPE Networking X240 QSFP28 4xSFP28 1m Direct Attach Copper Cable	JL282A
	HPE Networking X240 QSFP28 4xSFP28 3m Direct Attach Copper Cable	JL283A
	HPE Networking X240 QSFP28 4xSFP28 5m Direct Attach Copper Cable	JL284A
6	<b>The following QSFP28 Transceivers install into this Switch: (Use BTO only when adding to switch)</b>	
	HPE Networking Comware X240 40G QSFP+ to 4x10G SFP+ 1m Direct Attach Copper Splitter Cable	JG329A
	HPE Networking Comware X240 40G QSFP+ to 4x10G SFP+ 3m Direct Attach Copper Splitter Cable	JG330A
	HPE Networking Comware X240 40G QSFP+ to 4x10G SFP+ 5m Direct Attach Copper Splitter Cable	JG331A
7	<b>The following QSFP-DD Transceivers install into this Switch: (Use BTO only when adding to switch)</b>	
	HPE Networking X1E0 400G QSFP-DD to QSFP-DD 2m Passive Cable	R9J28A
	HPE Networking X1E0 400G QSFP-DD SR8 MM850 100m OM4 MPO16/APC Transceiver	R9J29A
	HPE Networking X1E0 400G QSFP-DD FR4-WDM1300 2km LC Transceiver	R9J30A
	HPE Networking Comware 1xQSFP-DD 400G to 4xQSFP56 100G 2x50G PAM4 2.5m Split Direct Attach Cable	S0E49A
	HPE Networking Comware 1xQSFP-DD 400G to 8xSFP56 50G 2.5m Split Direct Attach Cable	S0P73A
8	<b>If ANY Option is integrated OD1 to this Switch, then the Switch requires OD1. (Box level integration is not allowed)</b>	
9	<b>The following QSFP28 Transceivers install into this Switch: (Use BTO only when adding to switch)</b>	
	HPE Networking X150 100G QSFP28 MPO SR4 100m MM Transceiver	JL274A
	HPE Networking X150 100G QSFP28 eSR4 300m MM Transceiver	JH672A
	HPE Networking X150 100G QSFP28 LC LR4 10km SM Transceiver	JL275A
	HPE Networking X150 100G QSFP28 CWDM4 2km SM Transceiver	JH673A
	HPE Networking X240 100G QSFP28 1m DAC Cable	JL271A
	HPE Networking X240 100G QSFP28 3m DAC Cable	JL272A
	HPE Networking X240 100G QSFP28 5m DAC Cable	JL273A
	HPE Networking X2A0 100G QSFP28 to QSFP28 7m Active Optical Cable	JL276A
	HPE Networking X2A0 100G QSFP28 to QSFP28 10m Active Optical Cable	JL277A
	HPE Networking X2A0 100G QSFP28 to QSFP28 20m Active Optical Cable	JL278A
	HPE Networking X150 100G QSFP28 LC SWDM4 100m MM Transceiver	JH419A
	HPE Networking X150 100G QSFP28 LC BiDi 100m MM Transceiver	JQ344A
	HPE Networking X2A0 100G QSFP28 5m Active Optical Cable	JL796A
	HPE Networking X2A0 100G QSFP28 30m Active Optical Cable	JL795A

Configuration Information

10	The following QSFP-DD Transceivers install into this Switch: (Use BTO only when adding to switch)		
	HPE Networking X1E0 400G QSFP-DD to QSFP-DD 2m Passive Cable		R9J28A
	HPE Networking X1E0 400G QSFP-DD SR8 MM850 100m OM4 MPO16/APC Transceiver		R9J29A
	HPE Networking X1E0 400G QSFP-DD FR4-WDM1300 2km LC Transceiver		R9J30A
Notes:	<ul style="list-style-type: none"><li>Drop down under power supply should offer the following options and results:<ul style="list-style-type: none"><li>Switch/Router/Power Supply to PDU Power Cord - B2B in North America, Mexico, Taiwan, and Japan or B2C ROW. (OCA Default B2B or B2C for Rack Level CTO)</li><li>Switch/Router/Power Supply to Wall Power Cord - Localized Option (OCA Default for BTO)</li><li>High Volt Switch/Router/Power Supply to Wall Power Cord - B2E Option. (Offered only in North America, Mexico, Taiwan, and Japan)</li><li>No Power Cord - AC3 Option</li></ul></li><li>Locking Power Cord (J9955A) L6-20P is available through the OCA Accessories tab</li><li>OCA Only Model Selection Form - HPE Offering &gt; Switches &gt; HPE Networking Comware &gt; Access: HPE Networking Comware 5960 Switch Series</li></ul>		



## Configuration Information

### Rack Level Integration CTO Models

CTO Switch Chassis		SKU
Rule #	Description	
3, 6, 8, 9, 10	<p>HPE Networking Comware Data Center Switch 48p QSFP28 100G 6p QSFP-DD 400G 5960R</p> <ul style="list-style-type: none"> <li>• 48 QSFP+/QSFP28 40/100G ports (min=0 \ max=48)</li> <li>• 6 QSFP28/QSFP-DD 100G/400G ports (min=0 \ max=6)</li> <li>• 1 RJ45 Management Port</li> <li>• 1 Console port</li> <li>• 1 USB2.0 port</li> <li>• 2 Power Supply Slots (Min 1 required)</li> <li>• 6 Fan Tray Slots (Min 6 required)</li> <li>• 2U - Height</li> </ul>	S4J82A
3, 4, 5, 6, 7, 8, 9	<p>HPE Networking Comware Data Center Switch 24-port 100/200G QSFP56 8-port 400G QSFP-DD 5960</p> <ul style="list-style-type: none"> <li>• 24 QSFP+/QSFP28 40/100G ports (min=0 \ max=24)</li> <li>• 8 QSFP28/QSFP-DD 100G/400G ports (min=0 \ max=8)</li> <li>• 1 RJ45 Management Port</li> <li>• 1 Console port</li> <li>• 1 USB2.0 port</li> <li>• 2 Power Supply Slots (Min 1 required)</li> <li>• 6 Fan Tray Slots (Min 6 required)</li> <li>• 1U - Height</li> </ul>	R9Y12A
1, 2, 3, 4, 5, 7, 8, 9	<p>HPE Networking Comware Data Center Switch 32-port 400G QSFP-DD 5960</p> <ul style="list-style-type: none"> <li>• 32 QSFP+/QSFP28/QSFP-DD 40G/100G/400G ports (min=0 \ max=32)</li> <li>• 2 SFP/SFP+ 1/10G ports (min=0 \ max=2)</li> <li>• 1 RJ45 Management Port</li> <li>• 1 Console port</li> <li>• 1 USB2.0 port</li> <li>• 2 Power Supply Slots (Min 1 required)</li> <li>• 6 Fan Tray Slots (Min 6 required)</li> <li>• 1U - Height</li> </ul>	R9Y13A
Configuration Rules		
Rule #	Description	
1	<p>The following SFP Transceivers install into this switch's Management Ports and SFP+ Ports: (Use OD1 or B01 if switch is CTO) - if applicable</p> <p>HPE Networking X120 1G SFP LC SX Transceiver</p> <p>HPE Networking X120 1G SFP LC LX Transceiver</p> <p>HPE Networking X120 1G SFP RJ45 T Transceiver</p> <p>HPE Networking X120 1G SFP LC LH100 Transceiver</p>	<p>JD118B</p> <p>JD119B</p> <p>JD089B</p> <p>JD103A</p>
2	<p>The following SFP+ Transceivers install into this Switch: (Use OD1 or B01 if switch is CTO) - if applicable</p> <p>HPE Networking X130 10G SFP+ LC BiDi 10km-Uplink Transceiver</p> <p>HPE Networking X130 10G SFP+ LC BiDi 10km-Downlink Transceiver</p> <p>HPE Networking X130 10G SFP+ LC BiDi 40km-Uplink Transceiver</p> <p>HPE Networking X130 10G SFP+ LC BiDi 40km-Downlink Transceiver</p> <p>HPE Networking X130 10G SFP+ LC SR Transceiver</p> <p>HPE Networking X130 10G SFP+ LC LR Transceiver</p> <p>HPE Networking X130 10G SFP+ LC LH 80km Transceiver</p> <p>HPE Networking X2A0 10G SFP+ to SFP+ 7m Active Optical Cable</p> <p>HPE Networking X2A0 10G SFP+ to SFP+ 10m Active Optical Cable</p>	<p>JL737A</p> <p>JL738A</p> <p>JL739A</p> <p>JL740A</p> <p>JD092B</p> <p>JD094B</p> <p>JG915A</p> <p>JL290A</p> <p>JL291A</p>

## Configuration Information

	HPE Networking X2A0 10G SFP+ to SFP+ 20m Active Optical Cable	JL292A
	HPE Networking X240 10G SFP+ SFP+ 0.65m DAC Cable	JD095C
	HPE Networking X240 10G SFP+ SFP+ 1.2m DAC Cable	JD096C
	HPE Networking X240 10G SFP+ SFP+ 3m DAC Cable	JD097C
	HPE Networking X240 10G SFP+ SFP+ 5m DAC Cable	JG081C
3	<b>The following QSFP+ Transceivers install into this Switch: (Use OD1 or B01 if switch is CTO) - if applicable</b>	
	HPE Networking X140 40G QSFP+ MPO SR4 Transceiver	JG325B
	HPE Networking X140 40G QSFP+ CSR4 300m Transceiver	JG709A
	HPE Networking X140 40G QSFP+ LC BiDi 100m MM Transceiver	JL251A
	HPE Networking X140 40G QSFP+ LC LR4 SM 10km 1310nm Transceiver	JG661A
	HPE Networking X140 40G QSFP+ LC LR4L 2km SM Transceiver	JL286A
	HPE Networking X140 40G QSFP+ LC ER4 40km SM Transceiver	JL306A
	HPE Networking Comware 40G PLR4 QSFP+ 10km Transceiver	S4J93A
	HPE Networking X2A0 40G QSFP+ to QSFP+ 7m Active Optical Cable	JL287A
	HPE Networking X2A0 40G QSFP+ to QSFP+ 10m Active Optical Cable	JL288A
	HPE Networking X2A0 40G QSFP+ to QSFP+ 20m Active Optical Cable	JL289A
	HPE Networking Comware X240 40G QSFP+ QSFP+ 1m Direct Attach Copper Cable	JG326A
	HPE Networking Comware X240 40G QSFP+ QSFP+ 3m Direct Attach Copper Cable	JG327A
	HPE Networking Comware X240 40G QSFP+ QSFP+ 5m Direct Attach Copper Cable	JG328A
4	<b>The following QSFP28 Transceivers install into this Switch: (Use OD1 or B01 if switch is CTO) - if applicable</b>	
	HPE Networking X150 100G QSFP28 PSM4 500m SM Transceiver	JH420A
5	<b>The following QSFP28 Transceivers install into this Switch: (Use OD1 or B01 if switch is CTO) - if applicable</b>	
	HPE Networking X240 QSFP28 4xSFP28 1m Direct Attach Copper Cable	JL282A
	HPE Networking X240 QSFP28 4xSFP28 3m Direct Attach Copper Cable	JL283A
	HPE Networking X240 QSFP28 4xSFP28 5m Direct Attach Copper Cable	JL284A
6	<b>The following QSFP28 Transceivers install into this Switch: (Use OD1 or B01 if switch is CTO) - if applicable</b>	
	HPE Networking Comware X240 40G QSFP+ to 4x10G SFP+ 1m Direct Attach Copper Splitter Cable	JG329A
	HPE Networking Comware X240 40G QSFP+ to 4x10G SFP+ 3m Direct Attach Copper Splitter Cable	JG330A
	HPE Networking Comware X240 40G QSFP+ to 4x10G SFP+ 5m Direct Attach Copper Splitter Cable	JG331A
7	<b>The following QSFP-DD Transceivers install into this Switch: (Use OD1 or B01 if switch is CTO) - if applicable</b>	
	HPE Networking X1E0 400G QSFP-DD to QSFP-DD 2m Passive Cable	R9J28A
	HPE Networking X1E0 400G QSFP-DD SR8 MM850 100m OM4 MPO16/APC Transceiver	R9J29A
	HPE Networking X1E0 400G QSFP-DD FR4-WDM1300 2km LC Transceiver	R9J30A
	HPE Networking Comware 1xQSFP-DD 400G to 4xQSFP56 100G 2x50G PAM4 2.5m Split Direct Attach Cable	S0E49A
	HPE Networking Comware 1xQSFP-DD 400G to 8xSFP56 50G 2.5m Split Direct Attach Cable	S0P73A
8	<b>If HPE CTO Switch Chassis is selected for Rack Level Integration, Then the Switch needs to integrate (with OD1) to the Rack.</b>	
9	<b>The following QSFP28 Transceivers install into this Switch: (Use BTO only when adding to switch)</b>	
	HPE Networking X150 100G QSFP28 MPO SR4 100m MM Transceiver	JL274A
	HPE Networking X150 100G QSFP28 eSR4 300m MM Transceiver	JH672A
	HPE Networking X150 100G QSFP28 LC LR4 10km SM Transceiver	JL275A
	HPE Networking X150 100G QSFP28 CWDM4 2km SM Transceiver	JH673A
	HPE Networking X240 100G QSFP28 1m DAC Cable	JL271A
	HPE Networking X240 100G QSFP28 3m DAC Cable	JL272A
	HPE Networking X240 100G QSFP28 5m DAC Cable	JL273A
	HPE Networking X2A0 100G QSFP28 to QSFP28 7m Active Optical Cable	JL276A
	HPE Networking X2A0 100G QSFP28 to QSFP28 10m Active Optical Cable	JL277A
	HPE Networking X2A0 100G QSFP28 to QSFP28 20m Active Optical Cable	JL278A

## Configuration Information

	HPE Networking X150 100G QSFP28 LC SWDM4 100m MM Transceiver	JH419A
	HPE Networking X150 100G QSFP28 LC BiDi 100m MM Transceiver	JQ344A
	HPE Networking X2A0 100G QSFP28 5m Active Optical Cable	JL796A
	HPE Networking X2A0 100G QSFP28 30m Active Optical Cable	JL795A
10	<b>The following QSFP-DD Transceivers install into this Switch: (Use BTO only when adding to switch)</b>	
	HPE Networking X1E0 400G QSFP-DD to QSFP-DD 2m Passive Cable	R9J28A
	HPE Networking X1E0 400G QSFP-DD SR8 MM850 100m OM4 MPO16/APC Transceiver	R9J29A
	HPE Networking X1E0 400G QSFP-DD FR4-WDM1300 2km LC Transceiver	R9J30A
<b>Notes:</b>	<ul style="list-style-type: none"> <li>– Drop down under power supply should offer the following options and results:               <ul style="list-style-type: none"> <li>○ Switch/Router/Power Supply to PDU Power Cord - B2B in North America, Mexico, Taiwan, and Japan or B2C ROW. (OCA Default B2B or B2C for Rack Level CTO)</li> <li>○ Switch/Router/Power Supply to Wall Power Cord - Localized Option (OCA Default for BTO)</li> <li>○ High Volt Switch/Router/Power Supply to Wall Power Cord - B2E Option. (Offered only in North America, Mexico, Taiwan, and Japan)</li> <li>○ No Power Cord - AC3 Option</li> </ul> </li> <li>– Locking Power Cord (J9955A) L6-20P is available through the OCA Accessories tab</li> </ul>	

Enter the following menu selections as integrated to the CTO Model X server above if order is factory built.

## Switch Options

### Transceivers

#### SFP Transceivers

Rule #	Description	SKU
	HPE Networking X120 1G SFP RJ45 T Transceiver	JD089B
	HPE Networking X120 1G SFP LC SX Transceiver	JD118B
	HPE Networking X120 1G SFP LC LX Transceiver	JD119B
	HPE Networking X120 1G SFP LC LH100 Transceiver	JD103A

#### SFP+ Transceivers

Rule #	Description	SKU
	HPE Networking X130 10G SFP+ LC BiDi 10km-Uplink Transceiver	JL737A
	HPE Networking X130 10G SFP+ LC BiDi 10km-Downlink Transceiver	JL738A
	HPE Networking X130 10G SFP+ LC BiDi 40km-Uplink Transceiver	JL739A
	HPE Networking X130 10G SFP+ LC BiDi 40km-Downlink Transceiver	JL740A
	HPE Networking X130 10G SFP+ LC SR Transceiver	JD092B
	HPE Networking X130 10G SFP+ LC LR Transceiver	JD094B
	HPE Networking X130 10G SFP+ LC ER 40km Transceiver	JG234A
	HPE Networking X130 10G SFP+ LC LH 80km Transceiver	JG915A
	HPE Networking X2A0 10G SFP+ to SFP+ 7m Active Optical Cable	JL290A
	HPE Networking X2A0 10G SFP+ to SFP+ 10m Active Optical Cable	JL291A
	HPE Networking X2A0 10G SFP+ to SFP+ 20m Active Optical Cable	JL292A
	HPE Networking X240 10G SFP+ SFP+ 0.65m DAC Cable	JD095C
	HPE Networking X240 10G SFP+ SFP+ 1.2m DAC Cable	JD096C
	HPE Networking X240 10G SFP+ SFP+ 3m DAC Cable	JD097C
	HPE Networking X240 10G SFP+ SFP+ 5m DAC Cable	JG081C

#### QSFP+ Transceivers

Rule #	Description	SKU
	HPE Networking X140 40G QSFP+ MPO SR4 Transceiver	JG325B
	HPE Networking X140 40G QSFP+ CSR4 300m Transceiver	JG709A
	HPE Networking X140 40G QSFP+ LC BiDi 100m MM Transceiver	JL251A
	HPE Networking X140 40G QSFP+ LC LR4 SM 10km 1310nm Transceiver	JG661A
	HPE Networking X140 40G QSFP+ LC LR4L 2km SM Transceiver	JL286A
	HPE Networking X140 40G QSFP+ LC ER4 40km SM Transceiver	JL306A
	HPE Networking Comware 40G PLR4 QSFP+ 10km Transceiver	S4J93A

## Configuration Information

HPE Networking X2A0 40G QSFP+ to QSFP+ 7m Active Optical Cable	JL287A
HPE Networking X2A0 40G QSFP+ to QSFP+ 10m Active Optical Cable	JL288A
HPE Networking X2A0 40G QSFP+ to QSFP+ 20m Active Optical Cable	JL289A
HPE Networking Comware X240 40G QSFP+ QSFP+ 1m Direct Attach Copper Cable	JG326A
HPE Networking Comware X240 40G QSFP+ QSFP+ 3m Direct Attach Copper Cable	JG327A
HPE Networking Comware X240 40G QSFP+ QSFP+ 5m Direct Attach Copper Cable	JG328A
HPE Networking Comware X240 40G QSFP+ to 4x10G SFP+ 1m Direct Attach Copper Splitter Cable	JG329A
HPE Networking Comware X240 40G QSFP+ to 4x10G SFP+ 3m Direct Attach Copper Splitter Cable	JG330A
HPE Networking Comware X240 40G QSFP+ to 4x10G SFP+ 5m Direct Attach Copper Splitter Cable	JG331A

### QSFP28 Transceivers

Rule #	Description	SKU
	HPE Networking X150 100G QSFP28 MPO SR4 100m MM Transceiver	JL274A
	HPE Networking X150 100G QSFP28 LC SWDM4 100m MM Transceiver	JH419A
	HPE Networking X150 100G QSFP28 LC BiDi 100m MM Transceiver	JQ344A
	HPE Networking X150 100G QSFP28 eSR4 300m MM Transceiver	JH672A
	HPE Networking X150 100G QSFP28 PSM4 500m SM Transceiver	JH420A
	HPE Networking X150 100G QSFP28 LC LR4 10km SM Transceiver	JL275A
	HPE Networking X150 100G QSFP28 CWDM4 2km SM Transceiver	JH673A
	HPE Networking Comware 100G FR1 QSFP28 LC 2km SMF Transceiver	S2P29A
	HPE Networking X2A0 100G QSFP28 to QSFP28 7m Active Optical Cable	JL276A
	HPE Networking X2A0 100G QSFP28 to QSFP28 10m Active Optical Cable	JL277A
	HPE Networking X2A0 100G QSFP28 to QSFP28 20m Active Optical Cable	JL278A
	HPE Networking X240 100G QSFP28 1m DAC Cable	JL271A
	HPE Networking X240 100G QSFP28 3m DAC Cable	JL272A
	HPE Networking X240 100G QSFP28 5m DAC Cable	JL273A
	HPE Networking X240 QSFP28 4xSFP28 1m Direct Attach Copper Cable	JL282A
	HPE Networking X240 QSFP28 4xSFP28 3m Direct Attach Copper Cable	JL283A
	HPE Networking X240 QSFP28 4xSFP28 5m Direct Attach Copper Cable	JL284A
	HPE Networking X2A0 100G QSFP28 5m Active Optical Cable	JL796A
	HPE Networking X2A0 100G QSFP28 30m Active Optical Cable	JL795A

### QSFP-DD Transceivers

Rule #	Description	SKU
	HPE Networking X1E0 400G QSFP-DD SR8 MM850 100m OM4 MPO16/APC Transceiver	R9J29A
	HPE Networking X1E0 400G QSFP-DD FR4-WDM1300 2km LC Transceiver	R9J30A
	HPE Networking X1E0 400G QSFP-DD to QSFP-DD 2m Passive Cable	R9J28A
	HPE Networking Comware 1xQSFP-DD 400G to 4xQSFP56 100G 2x50G PAM4 2.5m Split Direct Attach Cable	S0E49A
	HPE Networking Comware 1xQSFP-DD 400G to 8xSFP56 50G 2.5m Split Direct Attach Cable	S0P73A

## Internal Power Supplies

Rule #	Description	SKU
1, 2	HPE Networking Comware 5960 400G 1600W AC Power Supply Unit	R9Y18A
	<ul style="list-style-type: none"> <li>includes 1 x c15, 1600w</li> </ul>	
	HPE Networking Comware 5960 400G 1600W AC Power Supply Unit PDU	R9Y18A#B2B
	<ul style="list-style-type: none"> <li>C15 PDU Jumper Cord (NA/MX/TW/JP)</li> </ul>	
	HPE Networking Comware 5960 400G 1600W AC Power Supply Unit PDU	R9Y18A#B2C
	<ul style="list-style-type: none"> <li>C15 PDU Jumper Cord (ROW)</li> </ul>	
	HPE Networking Comware 5960 400G 1600W AC Power Supply Unit No Loc	R9Y18A#AC3
	<ul style="list-style-type: none"> <li>No Localized Power Cord Selected</li> </ul>	
1	HPE Networking Comware 5960 400G 48VDC 2400W Power Supply Unit	R9Y19A
	<ul style="list-style-type: none"> <li>Includes 1 x c19, 1600w</li> </ul>	

### Configuration Rules

Rule #	Description
1	PSU's cannot be mixed in the same switch enclosure



## Configuration Information

- 2 Localization (Wall Power Cord) required on orders without B2B, B2C, and AC3 (PDU Power Cord) .  
(See Localization Menu)

REMARK: When Switches/Routers are Factory Racked, Then B2B, or B2C should be the Defaulted Power Cable option on the Switches/Routers.

- Notes:**
- Drop down under power supply should offer the following options and results:
    - Switch/Router to PDU Power Cord - B2B in NA, Mexico, Taiwan, and Japan or B2C ROW. (Watson Default B2B or B2C for Rack Level CTO)
    - Switch/Router/Power Supply to Wall Power Cord - Localized Option (Watson Default for BTO and Box Level CTO)
    - No Power Cord - AC3 Option

## Fan Trays

Rule #	Description	SKU
1, 2	HPE Networking Comware Module 400G Port Side to Power Supply Side Airflow Fan 5960	R9Y16A
1, 2	HPE Networking Comware Module 400G Power Supply Side to Port Side Airflow Fan 5960	R9Y17A

### Configuration Rules

Rule #	Description
1	Fan Trays cannot be mixed in the same switch enclosure
2	This fan tray is supported on: R9Y12A, R9Y13A, S4J82A

**Notes:** If there is any empty space below the switch in a rack when using Back to Front Fan Tray, R9Y17A, the rack will receive an Air Plenum kit that takes up 1U of additional space in the rack. The Air Plenum kit is not required on fully configured racks. The Air Plenum Kit is a non-saleable SKU, and is brought in automatically for CTO Factory Rack Level Integration.

## Software

### IMC

#### Orchestrator

Rule #	Description	SKU
1, 2	HPE Networking IMC Orchestrator Base License E-LTU	JL849AAE
1, 3	HPE Networking IMC Orchestrator Analyzer Add-on License E-LTU	JL850AAE
1, 4	HPE Networking IMC Orchestrator Network Node Add-on License E-LTU	JL851AAE
1, 3	HPE Networking IMC Orchestrator Analyzer IP Host Add-on License E-LTU	JL852AAE

### Configuration Rules

Rule #	Description
1	When configuring 12900 Switch Chassis(JH262A or JL255A), this Orchestrator Service is available when one of the following Type X MPUs is added: HPE Networking 12904E Type X Main Processing Unit HPE Networking 12900E Type X Main Processing Unit
2	IMC Orchestrator Base E-LTU sku must be Qty 1 per solution
3	If this analyzer E-LTU is selected, then Qty 1 must be added per solution. Additionally, if this Analyzer E-LTU is selected, then IP Host E-LTU must match qty of desired Hosts.
4	This Network Node Add-on E-LTU must match the switch qty in the solution

**Notes:** If there is any empty space below the switch in a rack when using Back to Front Fan Tray, R9Y17A, the rack will receive an Air Plenum kit that takes up 1U of additional space in the rack. The Air Plenum kit is not required on fully configured racks. The Air Plenum Kit is a non-saleable SKU, and is brought in automatically for CTO Factory Rack Level Integration.



## Technical Specifications

HPE NW CW 5960 24x100G/200G+ 8x400GQDD Sw (R9Y12A)	
<b>I/O ports and slots</b>	1 I/O module slot Supports a max of 24x100G/200G QSFP56/ QSFP28 ports, 8x400G QDD ports
<b>Additional ports and slots</b>	1 console port, 1 out of band management port, 1 USB port
<b>Power modules and slots</b>	2 power supply slots. 1 minimum power supply required (ordered separately)
<b>Fan tray</b>	6 hot swappable fans
<b>Physical Characteristics</b>	
<b>Dimensions (HxWxD)</b>	44 mm x 440 mm x 460 mm
<b>Weight</b>	≤ 13.5 kg
<b>Memory and proc</b>	D-1627 @ 2.9 GHz, 16G DDR4, 240G SSD
<b>Mounting and enclosure</b>	Mounts in an EIA standard 19-inch rack or other equipment cabinet (hardware included); horizontal surface mounting only
<b>Performance</b>	
<b>Latency</b>	<1μs
<b>Switching capacity</b>	16Tbps
<b>Forwarding capacity</b>	268 Bps
<b>MAC address table size</b>	32K (Route mode) 224K(MAC mode)
<b>Routing table size</b>	IPv4 97500 (MAC mode) 980000(24B)/ 1000000(32B) (Routing mode) IPv6 97500 (MAC mode) 1000000 (80B/128B) (Routing mode)
<b>MAC &amp; ARP table size</b>	ARP Entries — Upto 88K MAC Entries — Upto 500K
<b>Operating temp</b>	0°C to 40°C
<b>Operating relative humidity</b>	5% to 95%, noncondensing
<b>Non-operating/storage temp</b>	–40°F to 158°F (–40°C to 70°C)
<b>Non-operating/storage relative humidity</b>	5% to 95%, noncondensing
<b>Acoustic</b>	59.5 dB at 40% Fan Speed 72.3 dB at 70% Fan Speed 79.6 dB at 100% Fan Speed
<b>Airflow direction</b>	From front to rear
<b>Electrical Characteristics</b>	
<b>Frequency</b>	50/60 Hz
<b>Maximum heat dissipation</b>	2552BTU/h
<b>Current</b>	70A (12V)
<b>Voltage</b>	DC—Input Voltage 180V to 320V AC—Input Voltage 100V to 240V
<b>Maximum power rating</b>	748W
<b>Idle power</b>	Dual AC 146W  <b>Notes:</b> Idle power is the actual power consumption of the device with no ports connected. Maximum power rating and maximum heat dissipation are the worst-case theoretical maximum numbers provided for planning the infrastructure with fully loaded PoE (if equipped), 100% traffic, all ports plugged in, and all modules populated.
<b>Safety</b>	UL 60950-1CAN/CSA C22.2 No 60950-1IEC 60950-1AS/NZS 60950-1FDA 21 CFR Subchapter J GB 4943.1UL 62368-1CAN/CSA C22.2 No 62368-1IEC 62368-1EN 62368-1AS/NZS 62368-1
<b>Emissions</b>	FCC Part 15 SubpartB CLASS A ICES-003 CLASS A VCCI CLASS ACISPR 32 CLASS A EN 55032 CLASS A AS/NZS CISPR 32 CLASS A CISPR 35EN 55035EN 61000-3-2EN 61000-3-3ETSI EN 300 386

## Technical Specifications

<b>Telecom</b>	
<b>Management</b>	IMC; CLI; out-of-band management; SNMP Manager; Telnet; FTP. <b>Notes:</b> The customer must install a minimum of one power supply, as the device does not come with one. The customer must install 6 fan kits, as the device does not come with one.
<b>Services</b>	Refer to the Hewlett Packard Enterprise website at <a href="https://hpe.com/networking/services">hpe.com/networking/services</a> for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local Hewlett Packard Enterprise sales office

**HPE NW CW 5960 32x400G QSFP-DD Sw (R9Y13A)**

<b>I/O ports and slots</b>	1 I/O module slot Supports a max of 32 400G QSFP-DD ports and 2 SFP+ ports
<b>Additional ports and slots</b>	1 console port, 1 out of band management port, 1 USB port
<b>Power modules and slots</b>	2 power supply slots. 1 minimum power supply required (ordered separately)
<b>Fan tray</b>	6 hot swappable fans
<b>Physical Characteristics</b>	
<b>Dimensions (HxWxD)</b>	44 mm x 440 mm x 660 mm
<b>Weight</b>	≤ 12.2 kg
<b>Memory and proc</b>	D-1627 @ 2.9 GHz, 16G DDR4, 240G SSD
<b>Mounting and enclosure</b>	Mounts in an EIA standard 19-inch rack or other equipment cabinet (hardware included); horizontal surface mounting only
<b>Performance</b>	
<b>Latency</b>	<1 μs
<b>Switching capacity</b>	25.6Tbps
<b>Forwarding capacity</b>	353 Bps
<b>MAC address table size</b>	32K (Route mode) 224K(MAC mode)
<b>Routing table size</b>	IPv4 196000 (MAC mode) 980000 (24B)/ 1000000 (32B) (Routing mode) IPv6 196000 (MAC mode) 1000000 (80B/128B) (Routing mode)
<b>MAC &amp; ARP table size</b>	ARP Entries — Upto 88K MAC Entries — Upto 500K
<b>Operating temp</b>	0°C to 40°C
<b>Operating relative humidity</b>	5% to 95%, noncondensing
<b>Non-operating/storage temp</b>	–40°F to 158°F (–40°C to 70°C)
<b>Non-operating/storage relative humidity</b>	5% to 95%, noncondensing
<b>Acoustic</b>	60.3 dB at 40% Fan Speed 73.2 dB at 70% Fan Speed 78.9 dB at 100% Fan Speed
<b>Airflow direction</b>	From front to rear
<b>Electrical Characteristics</b>	
<b>Frequency</b>	50/60 Hz
<b>Maximum heat dissipation</b>	3890BTU/h
<b>Current</b>	70A (12V)
<b>Voltage</b>	DC—Input Voltage 180V to 320V AC—Input Voltage 100V to 240V
<b>Maximum power rating</b>	1140W
<b>Idle power</b>	Dual AC 168W <b>Notes:</b> Idle power is the actual power consumption of the device with no ports connected. Maximum power rating and maximum heat dissipation are the worst-case

## Technical Specifications

	theoretical maximum numbers provided for planning the infrastructure with fully loaded PoE (if equipped), 100% traffic, all ports plugged in, and all modules populated.
<b>Safety</b>	UL 60950-1CAN/CSA C22.2 No 60950-1IEC 60950-1AS/NZS 60950-1FDA 21 CFR Subchapter J GB 4943.1UL 62368-1CAN/CSA C22.2 No 62368-1IEC 62368-1EN 62368-1AS/NZS 62368-1
<b>Emissions</b>	FCC Part 15 SubpartB CLASS A ICES-003 CLASS A VCCI CLASS ACISPR 32 CLASS A EN 55032 CLASS A AS/NZS CISPR 32 CLASS A CISPR 35EN 55035EN 61000-3-2EN 61000-3-3ETSI EN 300 386
<b>Telecom</b>	
<b>Management</b>	IMC; CLI; out-of-band management; SNMP Manager; Telnet; FTP. <b>Notes:</b> The customer must install a minimum of one power supply, as the device does not come with one. The customer must install 6 fan kits, as the device does not come with one.
<b>Services</b>	Refer to the Hewlett Packard Enterprise website at <a href="https://hpe.com/networking/services">hpe.com/networking/services</a> for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local Hewlett Packard Enterprise sales office

### HPE NW CW Sw 48C 6D 5960R (S4J82A)

<b>I/O ports and slots</b>	1 I/O module slot Supports a max of 48x100G QSFP28 (*24x100G QSFP56) 6 QSFP-DD ports
<b>Additional ports and slots</b>	1 console port, 1 out of band management port-copper, 1 USB port, 1 PPS/ToD time synchronization port
<b>Power modules and slots</b>	2 power supply slots. 1 minimum power supply required (ordered separately)
<b>Fan tray</b>	6 hot swappable fans
<b>Physical Characteristics</b>	
<b>Dimensions (HxWxD)</b>	65.5 mm × 440 mm × 660 mm
<b>Weight</b>	≤ 20 kg
<b>Memory and proc</b>	32G DDR4 Memory, 4GB NAND FLASH (eMMC)
<b>Mounting and enclosure</b>	Mounts in an EIA standard 19-inch rack or other equipment cabinet (hardware included); horizontal surface mounting only
<b>Performance</b>	
<b>Latency</b>	5~6 ms (64-byte packets)
<b>Switching capacity</b>	14.4 Tbps
<b>Forwarding capacity</b>	2700 Mpps
<b>MAC address table size</b>	Normal — 500K Routing — 155K
<b>Routing table size</b>	3.9M IPV4/3.9M IPV6
<b>MAC &amp; ARP table size</b>	ARP Entries — Upto 88K MAC Entries — Upto 500K
<b>Environment</b>	
<b>Operating temp</b>	0°C to 40°C
<b>Operating relative humidity</b>	5% to 95%, noncondensing
<b>Non-operating/storage temp</b>	-40°F to 158°F (-40°C to 70°C)
<b>Non-operating/storage relative humidity</b>	5% to 95%, noncondensing
<b>Acoustic</b>	
<b>Airflow direction</b>	From front to rear
<b>Electrical Characteristics</b>	
<b>Frequency</b>	50/60 Hz
<b>Maximum heat dissipation</b>	2112 BTU/hr
<b>Current</b>	52A (12V)
<b>Voltage</b>	DC — Input Voltage 180V to 320V AC — Input Voltage 100V to 240V

## Technical Specifications

<b>Maximum power rating</b>	1600W (Max)
<b>Idle power</b>	<p>Single power supply — 218W Dual power supplies — 229W</p> <p><b>Notes:</b> Idle power is the actual power consumption of the device with no ports connected. Maximum power rating and maximum heat dissipation are the worst-case theoretical maximum numbers provided for planning the infrastructure with fully loaded PoE (if equipped), 100% traffic, all ports plugged in, and all modules populated.</p>
<b>Safety</b>	<p>UL 60950-1 CAN/CSA C22.2 No 60950-1 IEC 60950-1 AS/NZS 60950-1 FDA 21 CFR Subchapter J GB 4943.1 UL 62368-1 CAN/CSA C22.2 No 62368-1 IEC 62368-1 EN 62368-1 AS/NZS 62368-1</p>
<b>Emissions</b>	<p>FCC Part 15 Subpart B Class A ICES-003 Class A VCCI Class A CISPR 32 Class A EN 55032 Class A AS/NZS CISPR32 Class A CISPR 35 EN 55035 EN 61000-3-2 EN 61000-3-3 ETSI EN 300 386</p>
<b>Telecom</b>	
<b>Management</b>	<p>IMC; CLI; out-of-band management; SNMP Manager; Telnet; FTP. <b>Notes:</b> The customer must install a minimum of one power supply, as the device does not come with one. The customer must install 6 fan kits, as the device does not come with one.</p>
<b>Services</b>	<p>Refer to the Hewlett Packard Enterprise website at <a href="http://hpe.com/networking/services">hpe.com/networking/services</a> for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local Hewlett Packard Enterprise sales office</p>



## Technical Specifications

Standards and Protocols	
Item	Standards
<b>Forwarding mode</b>	Store-forward
<b>Virtualization</b>	Distributed device management Distributed link aggregation Distributed resilient routing
<b>Link aggregation</b>	100GbE/200GbE/400GbE port aggregation Static aggregation, dynamic aggregation
<b>Data center</b>	VXLAN VXLAN DCI 802.1Qbb PFC, 802.1Qaz ETS, ECN, DCBX EVPN distributed gateway NETCONF, Python RDMA, RoCE
<b>Jumbo frame</b>	Supported
<b>MAC address table</b>	Static MAC address MAC address
<b>VLAN</b>	Port-based VLAN (quantity: 4094) Default VLAN
<b>Traffic monitoring</b>	sFlow®/Netstream
<b>DHCP</b>	DHCP client DHCP snooping/DHCP relay DHCP snooping support for Option 82/DHCP relay agent support for Option 82 IPv6 DHCP client DHCP relay
<b>ARP</b>	Gratuitous ARP Dynamic ARP source-suppression ARP
<b>IP routing</b>	Static routing, OSPFv1/v2/v3, BGP, IS-IS ECMP, VRRP, policy-based routing BGP4+ for IPv6, VRRP, IPv6 policy-based routing OSPFv3, ISISv6
<b>IPv6</b>	IPv6 ND ICMPv6, Telnetv6, SFT Pv6, SNMP over IPv6, BFDv6, VRRPv3 IPv6 tunnel
<b>Zero touch provisioning (ZTP)</b>	Auto-config
<b>MPLS</b>	L3VPN VPLS MPLS L3VPN MPLS L2VPN (Martini, Kompella) LDP VPLS QinQ, Supports P/PE Function
<b>Segment Routing (Supported with 5960R)</b>	MPLS SR, TI-LFA FRR MPLS TE policy, SRv6 EVPN VPLS over SRv6 EVPN VPWS over SRv6 MPLS L3VPN over SRv6 EVPN L3VPN over SRv6



## Technical Specifications

<b>MSTP</b>	STP/RSTP/MSTP PVST+/RPVST+ STP root guard BPDU guard
<b>QoS/ACL</b>	Inbound and outbound traffic rate limit Committed Access Rate (CAR) Eight output queues on each port Flexible port and queue-based queuing and scheduling algorithms SP, WRR, WFQ, SP+WRR, and SP+WFQ queuing 802.1p and DSCP priority remarking Packet filtering at Layer 2 to Layer 4 Traffic classification based on source MAC address, destination MAC address, source IPv4/IPv6 address, destination IPv4/IPv6 address, port number, protocol type, and VLAN Time range-based ACL Bi-directional ACLs (inbound and outbound) ACLs VLAN-based ACL assignment WRED
<b>Mirroring</b>	Traffic mirroring N:4 port mirroring Local port mirroring, remote port mirroring Multiple remote mirroring ports (reflector port)
<b>LACP</b>	LACP LACP local forwarding first LACP short time LACP stack split detection
<b>Security</b>	Hierarchical user management and password protection AAA/RADIUS/HWTACACS MACsec (only supported with 5960R) SSH 2.0 HTTPS/SSL PKI
<b>LLDP</b>	LLDP LLDP-MED
<b>Loading and upgrading</b>	Loading/upgrading through the XMODEM protocol Loading/upgrading through FTP and TFTP
<b>Management and maintenance</b>	Configuration via CLI, Telnet, and console port scheduled job SNMPv1/v2c/v3 Telemetry gRPC HPE IMC System logs Hierarchical alarms NTP, SNTP Power, fan, and temperature alarms Debugging information output Ping and traceroute File uploading and downloading through the USB port
<b>Safety</b>	UL 60950-1 CAN/CSA C22.2 No. 60950-1 IEC 60950-1, EN 60950-1 AS/NZS 60950-1 FDA 21 CFR Subchapter J GB 4943.1



Technical Specifications

EMC	FCC Part 15 Subpart B CLASS A ICES-003 CLASS A VCCI CLASS A CISPR 32 CLASS A EN 55032 CLASS A AS/NZS CISPR 32 CLASS A CISPR 24 EN 55024 EN 61000-3-2 EN 61000-3-3 ETSI EN 300 386 GB/T 9254 YD/T 993
-----	--





## Summary of Changes

Date	Version History	Action	Description of Change
21-July-2025	<b><u>Version 10</u></b>	Changed	Survey link updated
27-May-2025	<b><u>Version 9</u></b>	Changed	Switching capacity was updated for R9Y12A and R9Y13A in Technical Specifications.
05-May-2025	<b><u>Version 8</u></b>	Changed	Configuration Information section was updated.
02-Dec-2024	<b><u>Version 7</u></b>	Changed	Configuration Information section was updated.
04-Nov-2024	<b><u>Version 6</u></b>	Changed	Standard Features and Configuration Information sections were updated.
05-Aug-2024	<b><u>Version 5</u></b>	Changed	Technical Specifications section was updated.
06-May-2024	<b><u>Version 4</u></b>	Changed	Configuration Information section was updated.
20-Nov-2023	<b><u>Version 3</u></b>	Changed	Technical Specifications section was updated.
07-Aug-2023	<b><u>Version 2</u></b>	Changed	Overview section was updated.
05-Jun-2023	<b><u>Version 1</u></b>	New	New QuickSpecs



## Copyright

Make the right purchase decision.  
Contact our presales specialists.

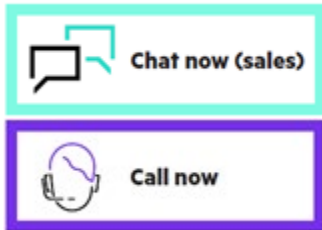

**Shape the Future of QuickSpecs – Your Input Matters**

© Copyright 2025 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

To learn more, visit <http://www.hpe.com/networking>

a50007000enw - 17110 - Worldwide - V10 - 21-July-2025