

RM-CI-T24MC

PRODUCT LINE
CISRACK


VENDOR
CISCO

SUPPORTED MODELS

MX68
MX68C
MX68CW

COLOR
CISCO BLUE

DIMENSIONS
(HxWxD)
44 x 483 x 366 mm
1.73 x 19.00 x 8.54 inch

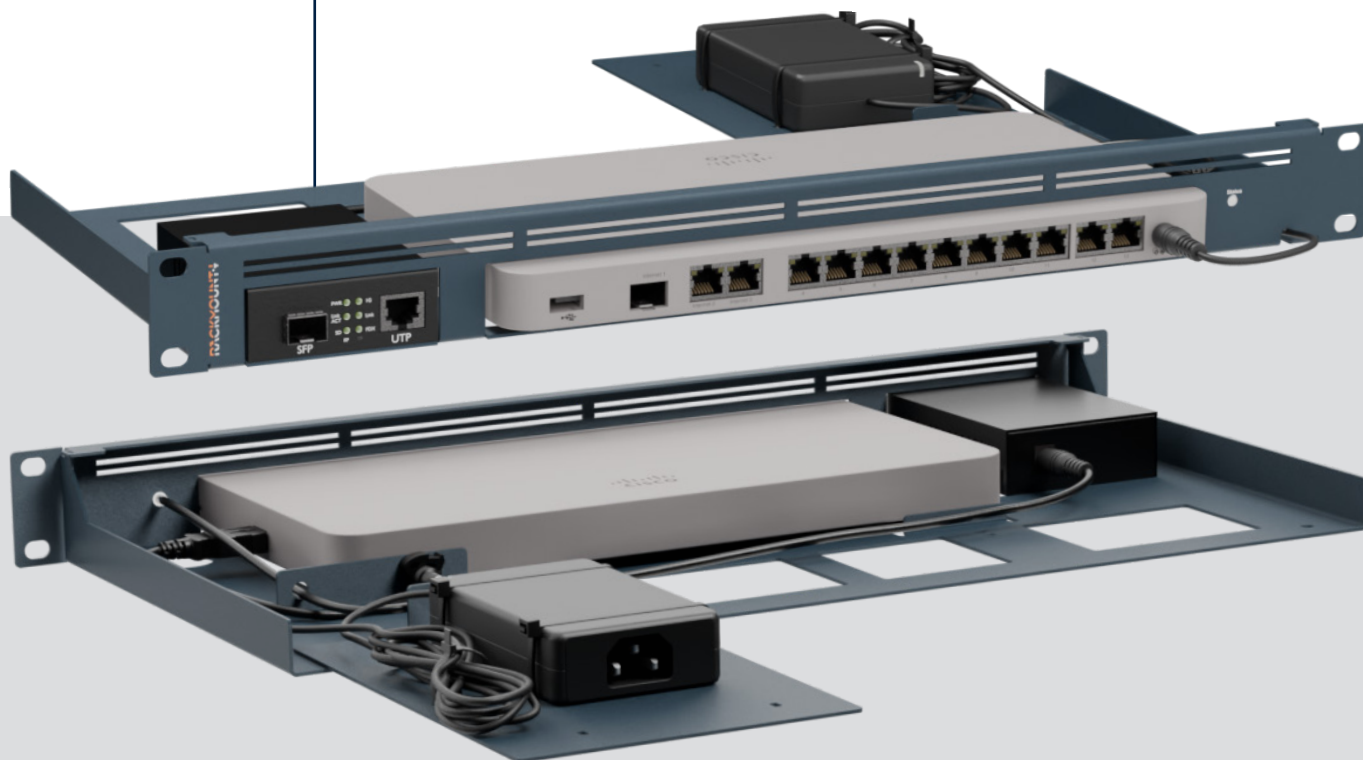

MOUNTING INSTRUCTIONS

1. Remove the rear-right screw from the media converter and use it to mount it on the rack. See the MC manual [here](#).
2. Remove the four rubber feet and two front bolts from the bottom of the appliance.
3. Insert the appliance backwards through the rack's FRONT opening.
4. Run the media converter's cable through the front rack opening.
5. Turn the rack over and fix the appliance with the original bolts.
6. Plug in the media converter's power cord and secure excess with a zip tie.
7. Place the power supply on the add-on, secure it with two zip ties, slide into the rack, and fix with a bolt and nut.
8. Run the power cable through the square front hole, connect it to the inlet, secure it to the rack, and tie down any excess.

Please ensure proper ventilation according to the network appliance manufacturer's guidelines.

PACKAGE CONTENTS

- 1 Rackmount
- 1 Extension plate
- 1 Media converter
- 5 Zip ties
- 2 Allen keys
- 1 Lightpipe
- 1 USB/DC cable
- 1 Screw
- 1 Nut

Appliance not included.

 **CONSIDER THE ENVIRONMENT,
RECYCLE WHERE APPLICABLE**

QUESTIONS

Email support@rackmount.it or contact your reseller.

RACKMOUNT.IT

Install Guide - 23-06-2024