


Overview

HPE ProLiant DL385 Gen10 Server

The HPE ProLiant DL385 Gen10 Server is redefining price/performance with the new math for virtualized compute. Powered by the latest AMD® EPYC® 7xx2 Series Processors, the HPE ProLiant DL385 Gen10 Server offers greater processing power and faster memory speeds up to 2933 MT/s. This 2P, 2U server has been designed with flexibility while delivering a high maximum core count and large memory footprint. Choose this purpose-built platform for virtualization.

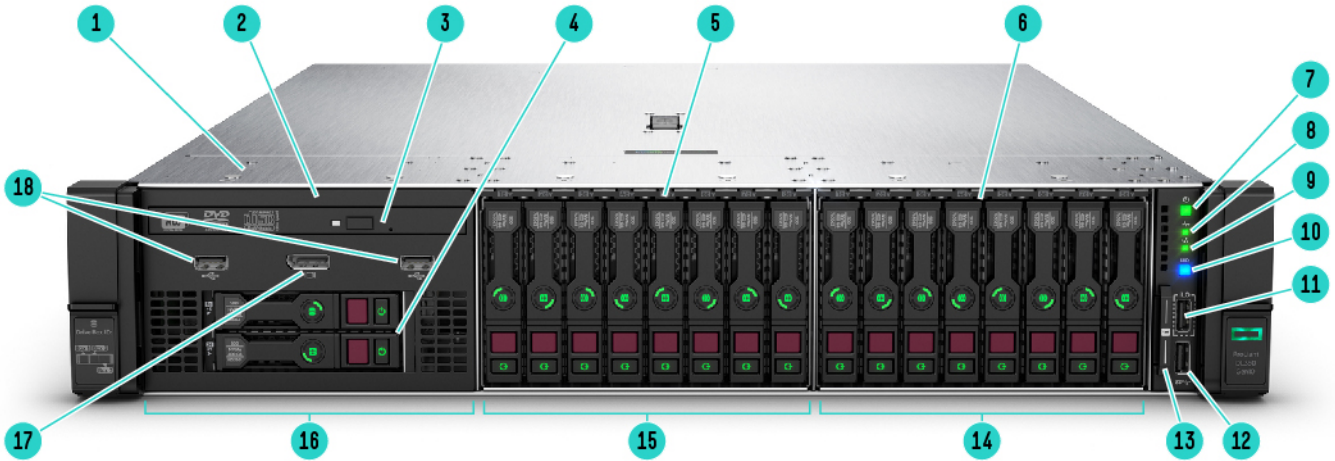


HPE ProLiant DL385 Gen10 Server - Front View

SFF chassis with optional Universal Media bay with optical and 2 NVME plus 16 NVMe shown

- | | |
|-------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------|
| 1 Quick removal access panel | 10 UID button |
| 2 Drive Bay 1. Optional Universal Media bay. 2 USB 2.0 and Display port standard shown (8 SFF bay or 6 SFF+2NVMe or 8NVMe optional) | 11 iLO Front Service Port |
| 3 Optional Optical drive. Requires Universal Media bay | 12 USB 3.0 |
| 4 Optional 2 SFF HDD, requires optional Universal Media bay | 13 Serial label pull tag |
| 5 Drive Bay 2. NVMe shown (8 SFF, 6SFF+2NVMe or 8 NVMe PCIe SSD optional) | 14 Box 3 |
| 6 Drive Bay 3. NVMe shown (8 SFF, 6SFF+2NVMe or 8 NVMe PCIe SSD optional) | 15 Box 2 |
| 7 Power On/Standby button and system power LED button | 16 Box 1 |
| 8 Health LED | 17 Optional front display port (Via Universal Media Bay) |
| 9 NIC status | 18 Optional USB 2.0 (via Universal Media Bay) |

Overview

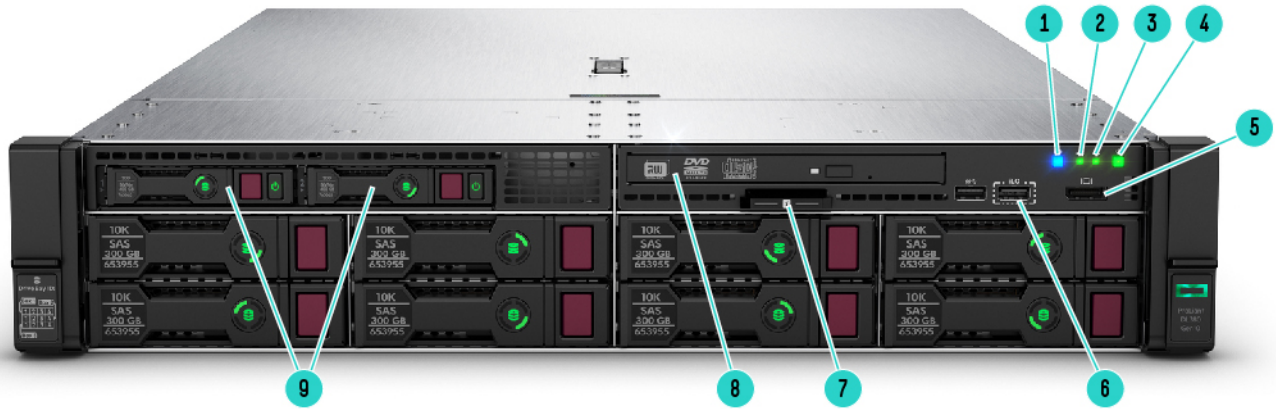


HPE ProLiant DL385 Gen10 Server - Front View

8LFF chassis with Universal media bay and optional 2SFF and optical drive shown

- | | |
|-------------------------------------------------------|----------------------------------------------------|
| 1 Unit ID button | 6 iLO Front Service Port |
| 2 Health LED | 7 Serial label pull tag |
| 3 NIC status | 8 Optional optical drive shown (blank as standard) |
| 4 Power On/Standby button and system power LED button | 9 Optional 2 SFF Drive bay, 2 NVMe shown |
| 5 Front display port | |

Overview

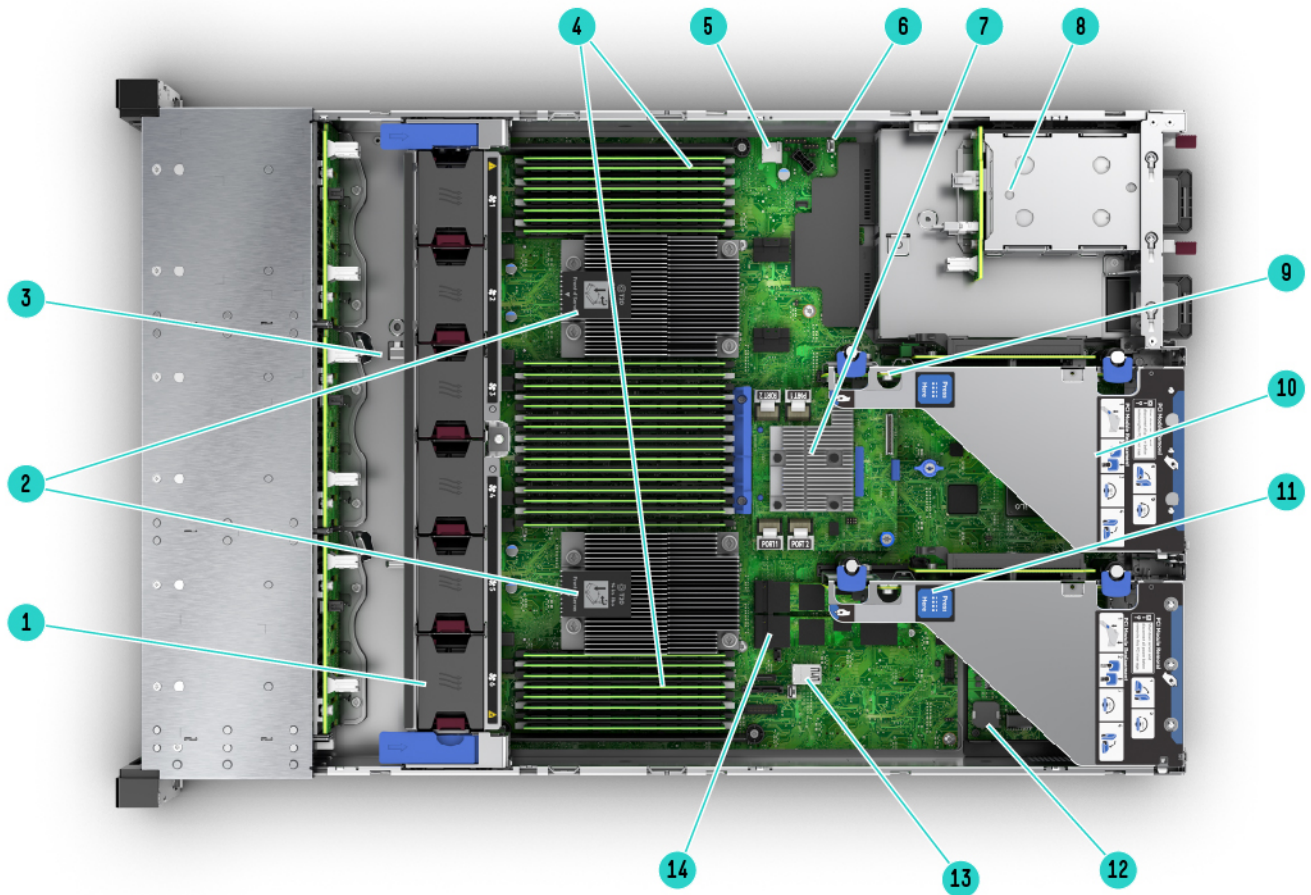
**HPE ProLiant DL385 Gen10 Server - Internal View**

8SFF chassis with optional 2nd CPU, FlexLOM, Smart array shown

- | | |
|----------------------------------------------------------------------------------|------------------------------------------------------------------|
| 1. Fan cage shown with 6 standard Hot-plug fans (High Performance fans optional) | 8 (Under) Hot Plug redundant HPE Flexible Slot Power supplies |
| 2. 2 Processors (heatsinks shown) | 9 Connection for second (optional) riser (Requires second CPU) |
| 3. Optional HPE Smart Storage Battery (not shown) | 10 **Embedded 4x1Gbe NIC (if equipped) |
| 4. DDR4 DIMM slots. Shown fully populated in 32 slots (16 per processor) | 11 Primary PCIe riser, standard (Optional double wide GPU riser) |
| 5. MicroSD card slot (Optional Dual Micro-SD option) | 12 Optional Flexible LOM slot |
| 6. Chassis intrusion detection connector | 13 Internal USB 3.0 connector |
| 7. Optional HPE Flexible Smart Array Controller (P408i-a shown) | 14. Embedded M.2 connectors |

NOTE:: **Embedded 4x 1Gbe Adapter is not equipped on new boards for 7xx2 series processors

Overview

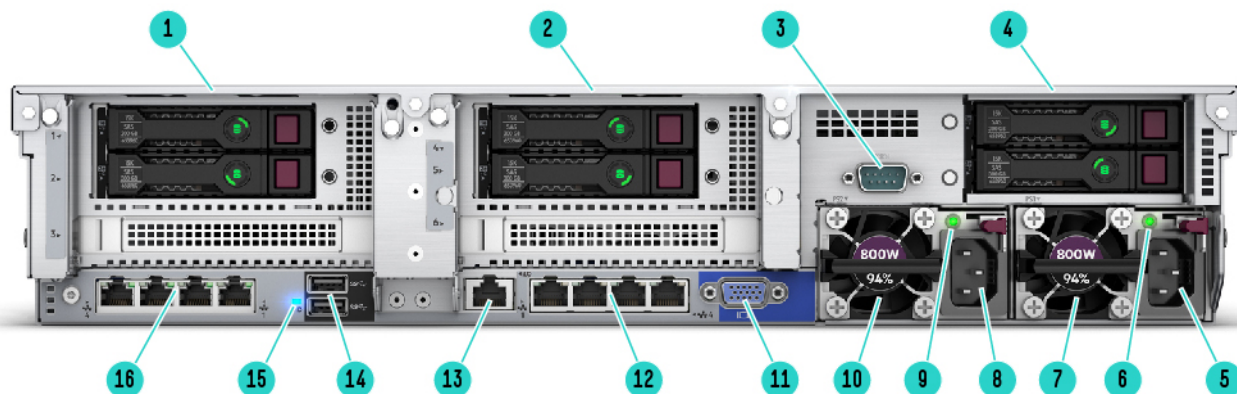

HPE ProLiant DL385 Gen10 Server - Rear View

With optional FlexLOM, Rear drives and Serial port shown

- | | |
|-------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------|
| 1 Primary Riser. PCI Slots (Slots 1-3 top to bottom, riser shipped standard, not shown) Optional 2SFF rear drives | 9 Power supply Power LED Bay 2 |
| 2 Secondary Riser. PCI Slots (Slots 4-6 top to bottom, not shown, requires second riser card, and second processor). Optional 2 SFF rear drives | 10 HPE Flexible Slot Power Supply Bay 2 |
| 3 Optional serial port | 11 VGA connector |
| 4 Tertiary Riser (Slots 7-8 top to bottom, not shown). Optional rear 2 SFF HDD | 12 **Embedded 4 x 1GbE Network Adapter(if equipped) |
| 5 Power supply power connection. Bay 1 | 13 Dedicated iLO management port |
| 6 Power supply Power LED. Bay1 | 14 USB connectors 3.0 (2) |
| 7 HPE Flexible Slot Power Supply. Bay 1 | 15 Unit ID LED |
| 8 Power supply Power connection Bay 2 | 16 Optional FlexibleLOM ports (Shown: 4 x 1GbE) |

NOTE: **Embedded 4x 1GbE Adapter is not equipped on new boards for 7xx2 series processors

What's New:

- Supports the next generation AMD EPYC 7xx2 Series processor with double the core density compared to the previous generation and memory speeds up to 2933 MT/s.
- Embedded 4x 1GbE LOM is not supported with 7xx2 series processors
- Two new SMB Base SKU (BTO) offerings
- Support for two new AMD processors – EPYC 7371 and EPYC 7261
- Support for new GPU's – HPE NVIDIA Quadro RTX6000 Graphics Accelerator and HPE NVIDIA Quadro RTX8000 Graphics Accelerator
- New SAS & SATA Solid State Drives
- New NVME Solid State Drives

Overview

Platform Information

Form Factor

2U rack

Chassis Types

8 SFF with optional Universal Media Bay, and optional SFF or NVMe drive bay options

24 SFF bay with additional 6SFF rear drive bay option to total 30 SFF drives

8 LFF with Universal Media Bay

12 LFF with optional 4 LFF mid-plane and optional 3LFF + 2 SFF rear drive bay to total 19 LFF drives + 2 SFF drives

NOTE: The 3 LFF rear drive box will consume space for the secondary and tertiary riser.

NOTE: The 8 and 12 LFF chassis also supports the 2 SFF rear drive box which allows for the user to attach a secondary or tertiary riser.

NOTE: The 8 NVMe drive option (826689-B21) can only be leveraged in the SFF chassis and replaces Box 1, 2 or 3.

NOTE: The Premium cage (826690-B21, 6 SAS/SATA+2 NVMe) can only be leveraged in the SFF chassis and replaces Box 1, 2 or 3.

NOTE: The Universal Media Bay (882097-B21) not available with the LFF chassis or the 24 SFF front end, and can only be populated in Box 1.

NOTE: The 8 SFF can be upgraded with additional 8SFF drive box to total 16 or 24 SFF drives. For optimal upgrade Box 2 should be populated second, with Box 1 the last to be populated for a field upgrade to 24 SFF. For CTO builds requiring 24 SFF please use the 24 SFF chassis (878613-B21). Note a field upgrade to 24 SFF will require a High Performance fan kit (867810-B21).

NOTE: The 8 LFF chassis cannot be upgraded to 12 LFF front in the field; however the 4-LFF Mid plane (882096-B21) is supported, but will also require a performance fan kit (867810-B21).

NOTE: CPU selection is limited 125W or lower with 4LFF midtray selected.

NOTE: The 8LFF chassis ships with 6-standard fans.

NOTE: All models come with the S100i Smart Array Controller with embedded software RAID support for the 2 embedded M.2 drive connectors on the system board.

System Fans

Standard – fan types included

NOTE: 1P models ship with 4 standard fans. The second processor option kit contains 2 additional fans.

NOTE: The 12 LFF and 24 SFF chassis ship with 6 High performance fans as standard.

NOTE: The 8LFF chassis ships with 6 standard fans as standard.

NOTE: High performance fan kit is available to meet ambient temperature environments.

NOTE: High performance fan kits are required for rear drives, Graphics (GPU) card, 180w Processors SKUs or NVMe configurations.

Standard Features

Standard Features

Processors Up to 2 of the following depending on model.

NOTE: For more information regarding AMD EPYC processors, please see the following: <https://www.amd.com/en/products/epyc>.

| AMD EPYC Processor | Cores | Base Frequency | Max Frequency | Max Memory | Wattage | Cache | Memory |
|------------------------------------------------|-------|----------------|---------------|------------|---------|-------|----------|
| AMD® EPYC® 7xx2 Series Processor Family | | | | | | | |
| EPYC 7702 | 64 | 2.0Ghz | 3.35Ghz | 2TB | 200 | 256MB | 2933MT/S |
| EPYC 7502 | 32 | 2.5Ghz | 3.35Ghz | 2TB | 180 | 128MB | 2933MT/S |
| EPYC 7452 | 32 | 2.35Ghz | 3.35Ghz | 2TB | 155 | 128MB | 2933MT/S |
| EPYC 7402 | 24 | 2.8Ghz | 3.35Ghz | 2TB | 180 | 128MB | 2933MT/S |
| EPYC 7302 | 16 | 3.0Ghz | 3.3Ghz | 2TB | 155 | 128MB | 2933MT/S |
| EPYC 7262 | 8 | 3.2GHz | 3.4GHz | 2TB | 155 | 128MB | 2933MT/S |

| AMD EPYC Processor | Cores | Base Frequency | Max Frequency | Max Memory | Wattage | Cache | Memory |
|------------------------------------------------|-------|----------------|---------------|------------|---------|-------|---------------|
| AMD® EPYC® 7xx1 Series Processor Family | | | | | | | |
| EPYC 7601 | 32 | 2.2Ghz | 3.2Ghz | 2TB | 180 | 64MB | 2666MT/S |
| EPYC 7551 | 32 | 2.0Ghz | 3.0Ghz | 2TB | 180 | 64MB | 2666MT/S |
| EPYC 7501 | 32 | 2.0Ghz | 3.0Ghz | 2TB | 155/170 | 64MB | 2666MT/S |
| EPYC 7451 | 24 | 2.3Ghz | 3.2Ghz | 2TB | 180 | 64MB | 2400/2666MT/S |
| EPYC 7401 | 24 | 2.0Ghz | 3.0Ghz | 2TB | 155/170 | 64MB | 2400/2666MT/S |
| EPYC 7371 | 16 | 3.1GHz | 3.8GHz | 2TB | 155/170 | 64MB | 2400/2666MT/S |
| EPYC 7351 | 16 | 2.4Ghz | 2.9Ghz | 2TB | 155/170 | 64MB | 2400/2666MT/S |
| EPYC 7301 | 16 | 2.2Ghz | 2.7Ghz | 2TB | 155/170 | 64MB | 2400/2666MT/S |
| EPYC 7281 | 16 | 2.1Ghz | 2.7Ghz | 2TB | 155/170 | 32MB | 2400/2666MT/S |
| EPYC 7261 | 8 | 2.5GHz | 2.9GHz | 2TB | 155/170 | 64MB | 2400/2666MT/s |
| EPYC 7251 | 8 | 2.1Ghz | 2.9Ghz | 2TB | 120 | 32MB | 2400MT/S |

NOTE: All AMD EPYC processors can support up to 2TB of memory each.

Chipset

No chipset – System on Chip (SoC) design.

On System Management Chipset

HPE iLO 5 ASIC

NOTE: Read and learn more in the [iLO QuickSpecs](#).

Memory

One of the following depending on model

Type:

HPE DDR4 SmartMemory, Registered (RDIMM), Load Reduced (LRDIMM)

DIMM Slots Available 32 16 DIMM slots per processor, 8 channels per processor, 2 DIMMs per channel

Standard Features

With AMD® EPYC® 7xx1 Series Processor Family

| | | |
|---------------------------|--------|-------------------------------|
| Maximum capacity (LRDIMM) | 4.0 TB | 32 x 128 GB LRDIMM @ 2666 MHz |
| Maximum capacity (RDIMM) | 1.0 TB | 32 x 32 GB RDIMM @ 2666 MHz |

NOTE: The maximum memory speed is limited by the processor selection.

NOTE: Mixing of RDIMM and LRDIMM memory is not supported.

NOTE: When 2DIMMs are populated per channel, memory speed drops to 2133MT/S

With AMD® EPYC® 7xx2 Series Processor Family

| | | |
|--------------------------|--------|------------------------------------|
| Maximum capacity (RDIMM) | 1.0 TB | 32 x 32 GB RDIMM @ 2933 MHz @1 DPC |
|--------------------------|--------|------------------------------------|

NOTE: The maximum memory speed is limited by the processor selection.

NOTE: Mixing of RDIMM and LRDIMM memory is not supported.

NOTE: When 2DIMMs are populated per channel, memory speed drops to 2666 MT/S

Expansion Slots

| Slots # | Technology | Bus Width | Connector Width | Slot Form Factor | Notes |
|---------|------------|-----------|-----------------|------------------------------|--------|
| 1 | PCIe 3.0 | X8 | X8 | Full-height,full-length slot | Proc 1 |
| 2 | PCIe 3.0 | X16 | X16 | Full-height,full-length slot | Proc 1 |
| 3 | PCIe 3.0 | X8 | X8 | Full-height,half-length slot | Proc 1 |

NOTE: Bus Width Indicates the number of physical electrical lanes running to the connector.

| Slots # | Technology | Bus Width | Connector Width | Slot Form Factor | Notes |
|---------|------------|-----------|-----------------|------------------------------|--------|
| 1 | PCIe 3.0 | X8 | X8 | Full-height,full-length slot | Proc 2 |
| 2 | PCIe 3.0 | X16 | X16 | Full-height,full-length slot | Proc 2 |
| 3 | PCIe 3.0 | X8 | X8 | Full-height,half-length slot | Proc 2 |

| Slots # | Technology | Bus Width | Connector Width | Slot Form Factor | Notes |
|---------|------------|-----------|-----------------|------------------------------|--------|
| 1 | PCIe 3.0 | X8 | X8 | Full-height,full-length slot | Proc 2 |
| 2 | PCIe 3.0 | X8 | X8 | Full-height,full-length slot | Proc 2 |

NOTE: Tertiary riser (other options available) can be leveraged without secondary riser.

NOTE: Bus width indicated the number of physical electrical lanes running to the connector.

Storage Controllers

The Gen10 controller naming framework has been updated to simplify identification as depicted below. For a more detailed breakout of the available Gen10 Smart Array controllers visit the [HPE Smart Array Gen10 Controllers Data Sheet](#).

One of the following depending on model

Software RAID

HPE Smart Array S100i SR Gen10 SW RAID

NOTE: HPE Smart Array S100i SR Gen10 SW RAID will operate in UEFI mode only. For legacy support an additional controller will be needed, and for CTO orders please also select the Legacy mode settings part, 758959-B22.

NOTE: HPE Smart Array S100i SR Gen10 SW RAID is off by default and must be enabled.

NOTE: The S100i supports the 2 M.2 system board connectors. .

Essential RAID Controller

HPE Smart Array E208i-a SR Gen10 Controller

HPE Smart Array E208i-p SR Gen10 Controller

HPE Smart Array E208e-p SR Gen10 Controller

Standard Features

Performance RAID Controller

- HPE Smart Array P408i-a SR Gen10 Controller
- HPE Smart Array P408i-p SR Gen10 Controller
- HPE Smart Array P408e-p SR Gen10 Controller
- HPE Smart Array P816i-a SR Gen10 Controller
- HPE Smart Array P824i-p MR Gen10 Controller

NOTE: Performance RAID Controllers require the HPE Smart Storage Battery (P01366-B21) which is sold separately.

Internal Storage Devices

- One of the following depending on model

Optical Drive

- Ships standard in Performance Models
- Optional: DVD-ROM, DVD-RW

Hard Drives

- None ship standard

Maximum Internal Storage

| | Capacity | Configuration |
|----------------------------|---------------|-------------------------------------------------------------------------------------------------------|
| Hot Plug SFF SAS | 72.0 TB | 24+6 x 2.4 TB* (with optional rear SFF drive cage) |
| Hot Plug SFF SATA | 60.0 TB | 24+6 x 2 TB (with optional SFF drive cage) |
| Hot Plug LFF SAS | 296.6 TB | 12+4+3 x 14 TB + 2 x 15.3 TB (with optional mid –tray and rear LFF drive cage, plus 2 SFF SSD rear) |
| Hot Plug LFF SATA | 296.6 TB | 12+4+3 x 12 TB + 2 x 15.3 TB (with optional mid –tray and rear LFF drive cage, plus 2 SFF SSD rear) |
| Hot Plug SFF SAS SSD | 459 TB | 24+6 x 15.3 TB (with optional rear SFF drive cage) |
| Hot Plug LFF SATA SSD | 67.08 TB | 12+4+3 x 1.92 TB + 2 x 15.3 TB (with optional mid –tray and rear LFF drive cage, plus 2 SFF SSD rear) |
| Hot Plug SFF SATA SSD | 230.4 TB | 24+6 x 7.68 TB (with optional 2SFF drive cage) |
| Hot Plug SFF NVMe PCIe SSD | 368.64TB NVMe | 24 x 15.36TB NVMe |

NOTE: 2x m.2 drives are supported on the system board.

NOTE: UFF drives are also supported.

Power Supply

HPE 500W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit

NOTE: Available in 94% efficiency.

HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit

NOTE: Available in 94% and 96% efficiency.

NOTE: Also available in -48VDC and 227VAC/380VDC power inputs.

HPE 1600W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit

NOTE: Available in 94% efficiency.

NOTE: 240v power input only.

HPE Flexible Slot (Flex Slot) Power Supplies share a common electrical and physical design that allows for hot plug, tool-less installation into HPE ProLiant Gen10 Performance Servers. Flex Slot power supplies are certified for high-efficiency operation and offer multiple power output options, allowing users to "right-size" a power supply for specific server configurations. This flexibility helps to reduce power waste, lower overall energy costs, and avoid "trapped" power capacity in the data center.

All pre-configured servers ship with a standard 6-foot IEC C-13/C-14 jumper cord (AOK02A). This jumper cord is also included with each standard AC power supply option kit. If a different power cord is required, please check the [ProLiant Power Cables](#) web page.

Standard Features

To review the power requirements for your selected system, please use the [HPE Power Advisor Tool](#).
For information on power specifications and technical content visit [HPE Server power supplies](#).

Interfaces

| | |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|
| Serial | Optional, rear |
| Display Port | 1 (SFF 1 front, optional via Universal Media Bay, 882097-B21), 8 LFF chassis standard |
| FlexibleLOM Network Ports | 4 x 1 Gb ports shipping standard (if equipped), with optional FlexibleLOM or stand up card |
| NOTE: 4 x 1 Gb ports are not equipped on new boards for 7xx2 series processors | |
| HPE iLO Remote Management Network Port | 1 Gb Dedicated |
| Front iLO Service Port | 1 standard (Not available on 12 LFF chassis or when SID is ordered, note iLO dongle required, 880123-B21) |
| Micro SD Slot | 1 Micro SD |
| NOTE: The Micro SD slot is not a hot-pluggable device. Customers should not attempt to plug an SD card into the SD slot while the server is powered. | |
| USB 3.0 | Up to 5 total: 1 front, 2 rear, 2 internal (secure), 2 optional USB 2.0 front via Universal Media Bay, or standard on 8LFF chassis |
| SID (Systems Insight Display) | Optional |
| NOTE: Not shipping as standard. Available as a CTO option or as a field upgrade (882099-B21). | |

Operating Systems and Virtualization Software Support for ProLiant Servers

- **AMD® EPYC® 7xx2 Series Processor Family**
 - Windows Server 2019
 - VMware ESXi 6.5 U3
 - VMware ESXi 6.7 U3
 - **Red Hat Enterprise Linux (RHEL) 7.6**
 - **SUSE Linux Enterprise Server (SLES) 12 SP4**
 - **SUSE Linux Enterprise Server (SLES) 15 SP1**
- **AMD® EPYC® 7xx1 Series Processor Family**
 - **Windows Server 2012 R2 (Most Recent Version)**
 - Windows Server 2016 (Most Recent Version)
 - **VMware ESXi 6.5 U1**, U2, and 6.7
 - **Red Hat Enterprise Linux (RHEL) 7.4**
 - **SUSE Linux Enterprise Server (SLES) 12 SP3**

NOTE: For more information on Hewlett Packard Enterprise Certified and Supported ProLiant Servers for OS and Virtualization Software and latest listing of software drivers available for your server.

<https://www.hpe.com/us/en/servers/server-operating-systems.html>

Standard Features

Industry Standard Compliance

- ACPI 6.1 Compliant
- PCIe 3.0 Compliant
- WOL Support
- Microsoft® Logo certifications
- PXE Support
- VGA/Display Port

NOTE: This support is on the optional Universal Media Bay.

- USB 3.0 Compliant (internal)
- USB 2.0 Compliant (external ports via SUV)

NOTE: This support is on the optional Universal Media Bay.

- Energy Star
- SMBIOS 3.1
- UEFI 2.6
- Redfish API
- IPMI 2.0
- Secure Digital 2.0
- Advanced Encryption Standard (AES)
- Triple Data Encryption Standard (3DES)
- SNMP v3
- TLS 1.2
- DMTF Systems Management Architecture for Server Hardware Command Line Protocol (SMASH CLP)
- Active Directory v1.0
- ASHRAE A3/A4

NOTE: For additional technical thermal details regarding ambient temperatures, humidity and features support please visit: <http://www.hpe.com/servers/ashrae>.

- UEFI (Unified Extensible Firmware Interface Forum)

NOTE: UEFI is the default for the DL385 Gen10. Legacy mode can be selected in the field or as a CTO option (758959-B22).

Graphics

- Integrated Video Standard
 - Video modes up to 1920 x 1200@60Hz (32 bpp)
 - 16MB Video Memory
- HPE iLO 5 on system management memory
 - 32 MB Flash
 - 4 Gbit DDR 3 with ECC protection

HPE Server UEFI/Legacy ROM

Unified Extensible Firmware Interface (UEFI) is an industry standard that provides better manageability and more secured configuration than the legacy ROM while interacting with your server at boot time. HPE ProLiant Gen10 servers have a UEFI Class 2 implementation and support both UEFI Mode (default) and Legacy BIOS Mode.

NOTE: The UEFI System Utilities tool is analogous to the HPE ROM-Based Setup Utility (RBSU) of legacy BIOS. For more information, please visit <http://www.hpe.com/servers/uefi>.

UEFI enables numerous new capabilities specific to HPE ProLiant servers such as:

- Secure Boot and Secure Start enable for enhanced security
- Operating system specific functionality
- Support for > 2.2 TB (using GPT) boot drives
- USB 3.0 Stack

Standard Features

HPE Server UEFI/Legacy ROM

- Embedded UEFI Shell
- Mass Configuration Deployment Tool using iLO RESTful API that is Redfish API Conformant
- PXE boot support for IPv6 networks

Workload Profiles for simple performance optimization

UEFI Boot Mode only:

- TPM 2.0 Support
- NVMe Boot Support
- iSCSI Software Initiator Support.
- HTTP/HTTPS Boot support as a PXE alternative.
- Boot support for option cards that only support a UEFI option ROM

NOTE: For UEFI Boot Mode, boot environment and OS image installations should be configured properly to support UEFI.

NOTE: UEFI FIO Setting (758959-B22) can be selected to configure the system in Legacy mode in the factory for your HPE ProLiant Gen10 Server.

Embedded Management

HPE Integrated Lights-Out (HPE iLO)

Monitor your servers for ongoing management, service alerting, reporting and remote management with HPE iLO.

Learn more at <http://www.hpe.com/info/ilo>.

UEFI

Configure and boot your servers securely with industry standard Unified Extensible Firmware Interface (UEFI).

Learn more at <http://www.hpe.com/servers/uefi>.

Intelligent Provisioning

Hassle free server and OS provisioning for 1 or more servers with Intelligent Provisioning.

Learn more at <http://www.hpe.com/servers/intelligentprovisioning>.

iLO RESTful API

iLO RESTful API is Redfish API conformance and offers simplified server management automation such as configuration and maintenance tasks based on modern industry standards. Learn more at <http://www.hpe.com/info/restfulapi>.

Server Utilities

Active Health System

The HPE Active Health System (AHS) is an essential component of the iLO management portfolio that provides continuous, proactive health monitoring of HPE servers. Learn more at <http://www.hpe.com/servers/ahs>.

Active Health System Viewer

Use the Active Health System Viewer, a web-based portal, to easily read AHS logs and speed problem resolution with HPE self-repair recommendations, to learn more visit: <http://www.hpe.com/servers/ahsv>.

Smart Update

Keep your servers up to date with the HPE Smart Update solution by using Smart Update Manager (SUM) to optimize the firmware and driver updates of the Service Pack for ProLiant (SPP). Learn more at

<https://buy.hpe.com/b2c/us/en/enterprise-software/infrastructure-management-software/system-server-management-software/hpe-system-server-software-management-software/smart-update-manager-%28sum%29/p/5182020>.

Standard Features

iLO Amplifier Pack

Designed for large enterprise and service provider environments with hundreds of HPE servers, the iLO Amplifier Pack is a free, downloadable open virtual application (OVA) that delivers the power to discover, inventory and update Gen8, Gen9 and Gen10 HPE servers at unmatched speed and scale. Use with an iLO Advanced License to unlock full capabilities.

Learn more at <http://www.hpe.com/servers/iLOamplifierpack>.

HPE iLO Mobile Application

Enables the ability to access, deploy, and manage your server anytime from anywhere from select smartphones and mobile devices.

For additional information please visit: <http://www.hpe.com/info/ilo/mobileapp>.

RESTful Interface Tool

RESTful Interface tool (iLOREST) is a single scripting tool to provision using iLO RESTful API to discover and deploy servers at scale.

Learn more at <http://www.hpe.com/info/resttool>.

Scripting Tools

Provision one to many servers using your own scripts to discover and deploy with Scripting Tool (STK) for Windows and Linux or Scripting Tools for Windows PowerShell. Learn more at <http://www.hpe.com/servers/powershell>.

HPE OneView Standard

HPE OneView Standard can be used for inventory, health monitoring, alerting, and reporting without additional fees. It can monitor multiple HPE server generations. The user interface is similar to the HPE OneView Advanced version, but the software-defined functionality is not available. Learn more at <http://www.hpe.com/info/oneview>.

HPE Systems Insight Manager (HPE SIM)

Ideal for environments already using HPE SIM, it allows you to monitor the health of your HPE ProLiant Servers and HPE Integrity Servers. Also provides you with basic support for non-HPE servers. HPE SIM also integrates with Smart Update Manager to provide quick and seamless firmware updates. Learn more at <http://www.hpe.com/info/hpesim>.

Security

- UEFI Secure Boot and Secure Start support
 - Immutable Silicon Root of Trust
 - FIPS 140-2 validation (iLO 5 certification in progress)
 - Common Criteria certification (iLO 5 certification in progress)
 - Configurable for PCI DSS compliance
 - Advanced Encryption Standard (AES) and Triple Data Encryption Standard (3DES) on browser
 - Support for Commercial National Security Algorithms (CNSA)
 - Tamper-free updates – components digitally signed and verified
 - Secure Recovery – recover critical firmware to known good state on detection of compromised firmware
 - Ability to rollback firmware
 - Secure erase of NAND/User data
 - TPM (Trusted Platform Module) 1.2 option
 - TPM (Trusted Platform Module) 2.0 option
 - Bezel Locking Kit option
 - Chassis Intrusion detection option
-

Standard Features

Warranty

This product is covered by a global limited warranty and supported by HPE Services and a worldwide network of Hewlett Packard Enterprise Authorized Channel Partners resellers. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Enhancements to warranty services are available through HPE Pointnext operational services or customized service agreements. Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

NOTE: Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response. Warranty repairs may be accomplished through the use of Customer Self Repair (CSR) parts. These parts fall into two categories: 1) Mandatory CSR parts are designed for easy replacement. A travel and labor charge will result when customers decline to replace a Mandatory CSR part; 2) Optional CSR parts are also designed for easy replacement but may involve added complexity. Customers may choose to have Hewlett Packard Enterprise replace Optional CSR parts at no charge. Additional information regarding worldwide limited warranty and technical support is available at:

<http://h17007.www1.hpe.com/us/en/enterprise/servers/warranty/>.

Optional Features

Server Management

HPE iLO Advanced

HPE iLO Advanced licenses offer smart remote functionality without compromise, for all HPE ProLiant servers. The license includes the full integrated remote console, virtual keyboard, video, and mouse (KVM), multi-user collaboration, console record and replay, and GUI-based and scripted virtual media and virtual folders. You can also activate the enhanced security and power management functionality.

HPE iLO Advanced Premium Security Edition

HPE iLO Advanced Premium Security Edition for iLO 5 includes iLO Advanced License plus high-end security modes, unique security capabilities, like Automatic FW recovery; Runtime FW verification, and Secure erase. Learn more about HPE iLO Advanced Premium Security Edition at: <http://www.hpe.com/servers/ilopremium>.

HPE OneView Advanced

HPE OneView brings a new level of automation to infrastructure management by taking a template driven approach to provisioning, updating, and integrating compute, storage, and networking infrastructure. It provides full-featured licenses which can be purchased for managing Gen8, Gen9 and Gen10 servers. To learn more visit <http://www.hpe.com/info/oneview>.

HPE InfoSight for Servers

HPE InfoSight for Servers combines the cloud-based machine learning of InfoSight with the health and performance monitoring of Active Health System (AHS) and iLO to optimize performance and predict and prevent problems. The end result is an intelligent environment that modernizes IT operations and enhances the support experience by predicting and preventing the infrastructure issues that lead to application disruptions, wasted IT staff time and missed business opportunities.

Learn more at <https://www.hpe.com/servers/infosight>

HPE Insight Cluster Management Utility (CMU)

HPE Insight Cluster Management Utility is a HyperScale management framework that includes software for the centralized provisioning, management and monitoring of nodes and infrastructure. Learn more at <http://www.hpe.com/info/cmu>.

Accelerator and GPU Information

Hewlett Packard Enterprise supports various accelerators on select HPE ProLiant servers to support different workloads. The accelerators enable seamless integration of GPU computing with HPE ProLiant servers for high-performance computing, large data center graphics, deep learning and virtual desktop deployments. These accelerators deliver all of the standard benefits of GPU computing while enabling maximum reliability and tight integration with system monitoring and management tools such as HPE Insight Cluster Management Utility.

Optional Features

Rack and Power Infrastructure

The story may end with servers, but it starts with the foundation that makes compute go – and business grow. We've reinvented our entire portfolio of rack and power products to make IT infrastructure more secure, more practical, and more efficient. In other words, we have created a stronger, smarter, and simpler infrastructure to help you get the most out of your IT equipment. As an industry leader, Hewlett Packard Enterprise is uniquely positioned to address the key concerns of power, cooling, cable management and system access.

HPE G2 Advanced and Enterprise Racks are perfect for the server room or today's modern data center with enhanced airflow and thermal management, flexible cable management, and a 10 year Warranty to support higher density computing.

HPE G2 PDUs offer reliable power in flexible form factors that operate at temperatures up to 60°C, include color-coded outlets and load segments and a low-profile design for optimal access to the rack and support for dense rack environments.

HPE Uninterruptible Power Systems are cost-effective power protection for any type workload. Some UPSs include options for remote management and extended runtime modules so your critical dense data center is covered in power outages.

HPE KVM Solutions include a console and switches designed to work with your server and IT equipment reliably. We've got a cost-effective KVM switch for your first rack and multiple connection IP switches with remote management and security capabilities to keep your data center rack up and running.

Learn more about HPE Racks, KVM, PDUs and UPSs at [HPE Rack and Power Infrastructure](#).

One Config Simple (SCE)

SCE is a guided self-service tool to help sales and non-technical people provide customers with initial configurations in 3 to 5 minutes. You may then send the configuration on for configuration help, or use in your existing ordering processes. If you require "custom" rack configuration or configuration for products not available in SCE, please contact Hewlett Packard Enterprise Customer Business Center or an Authorized Partner for assistance. <https://h22174.www2.hpe.com/SimplifiedConfig/Welcome#>

Pre-configured Models

HPE Pointnext - Service and Support

Achieve maximum return from your IT investment

Get the expertise you need at every step of your IT journey with **HPE Pointnext services and support**. We help you lower your risks and costs using proven best practices, automation and methodologies that have been tested and refined by HPE experts through thousands of deployments globally. With **Advisory Services**, we focus on your business outcomes and goals, partnering with you to design your transformation and build a roadmap tuned to your unique challenges. Our **Professional** and **Operational Services** can be leveraged to speed up time-to-production, boost performance and accelerate your business. HPE Pointnext specializes in flawless and on-time implementation, on-budget execution, and creative configurations that get the most out of software and hardware alike

Consume IT on your terms

HPE GreenLake Flex Capacity combines the simplicity, agility, and economics of public cloud with the security and performance benefits of on-premises IT. You determine your own “Right Mix” of Hybrid IT and workload placement without having to use. With its agile pay-per-use service, HPE GreenLake Flex Capacity can help your IT organization:

- Avoid IT expenses stemming from overprovisioning
- Improve time to market by maintaining a safe buffer of capacity, ready for use when you need it
- Keep capacity ahead of demand with regular monitoring—and a simple change order to replenish
- Pay for only the capacity used, not the capacity deployed
- Reduce IT risk with tailored support

Connect your devices:

Unlock all of the benefits of your technology investment by connecting your products to Hewlett Packard Enterprise. Reduce down time, increase diagnostic accuracy and have a single consolidated view of your environment. By connecting, you will receive 24x7 monitoring, pre-failure alerts, automatic call logging, and automatic parts dispatch. HPE Proactive Care Service and HPE Datacenter Care Service customers will also benefit from proactive activities to help prevent issues and increase optimization. All of these benefits are already available to you with your server storage and networking products, securely connected to HPE support. Learn more about getting connected at <http://www.hpe.com/services/getconnected>

Recommended Services

HPE Proactive Care gives customers an enhanced call experience. When your products are connected to HPE, Proactive Care helps prevent problems and maintains IT stability by utilizing personalized proactive reports with recommendations and advice. HPE Proactive Care is available in 3, 4 and 5 year terms with a choice of response levels: Next Business day (NBD), 24x7 with a 4 hour response, and 24x7 with 6 hour call to repair (CTR). This Service combines both reactive support when there is a problem with an enhanced call experience and start to finish case management with proactive reporting and advice. This service also includes collaborative software support for Independent Software Vendors (ISVs), (Red Hat, VMWare, Microsoft, etc.).

<https://www.hpe.com/h20195/v2/GetPDF.aspx/4AA3-8855ENW.pdf>

HPE Proactive Care Advanced

Incorporates all the deliverables of HPE Proactive Care plus includes personalized support from a local, assigned Account Support Manager who will share best practice advice and personalized recommendations designed to help improve availability and performance to help increase stability and reduce unplanned downtime. Leverage your system’s ability to connect to HPE for pre-failure alerts, automatic call logging and parts dispatch. For business critical incidents, Proactive Care Advanced offers critical event management to help reduce mean time to resolution. HPE Service Credits are included to redeem for technical and operational services. HPE Proactive Care Advanced is offered in 3, 4, and 5 year terms with a choice of response levels: Next Business day (NBD), 24x7 with a 4 hour response, and 24x7 with 6 hour call to repair (CTR).

<https://www.hpe.com/h20195/v2/getdocument.aspx?docname=4AA5-3259ENW>

NOTE:*HPE Proactive Care and HPE Proactive Care Advanced require that the customer connect their devices to make the most of these services and receive all the deliverables.

Pre-configured Models

Other related Services

HPE Server Hardware Installation

Provides for the basic hardware installation of HPE branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner.

<https://www.hpe.com/h20195/V2/GetPDF.aspx/5981-9356EN.pdf>

HPE Installation and Startup Service

Provides for the installation of your HPE hardware according to product specifications including options. The HPE service delivery technician will connect the product to a LAN as appropriate and enable remote support to allow for automatic case creation for hardware failures. Installation and start up services also includes the installation of one supported operating system type (Windows® or Linux).

HPE Datacenter Care service

HPE Datacenter Care helps customers to address the pressing needs of IT today and smoothly transform to a more agile cloud-like IT operations model. We help run and monitor your IT by offloading the day to day routine tasks, helping customers be more predictive and proactive, and saving time with one place to call with for all of their IT. Datacenter Care is available as both tailored statement of work and as a packaged service for 3, 4, and 5 year terms.

Partner with an assigned account team backed by local and global experts, access HPE enhanced call experience with priority access, use specialized support for complex, technologies, choose hardware and software support for your devices, implement proactive monitoring to stay ahead of issues, and access HPE IT best practices and IP. HPE Datacenter Care advantage options are available to add to your agreement to give you specialized expertise for performance, security, back up analysis, and much more. <https://www.hpe.com/us/en/services/datacenter-hybrid-services.html>

DC for Hyperscale

Datacenter Care for Hyperscale is available for Service Providers and HPC customers who use a scale out approach to computing with a high volume homogenous infrastructure and resilient architecture can take advantage of this environment support tailored to their operating model.

HPE Factory Express for Servers and storage

HPE Factory Express offers configuration, customization, integration and deployment services for HPE servers and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed.

Factory Express offers service packages for simple configuration, racking, installation, complex configuration and design services as well as individual factory services, such as image loading, asset tagging, and custom packaging. HPE products supported through Factory Express include a wide array of servers and storage: HPE Integrity, HPE ProLiant, HPE Apollo, HPE ProLiant Server Blades, HPE BladeSystem, HPE 9000 servers as well as the MSAxxx3PAR suite, XP, rackable tape libraries and configurable network switches.

HPE Service Credits

HPE Service Credits offers flexible services and technical skills to meet your changing IT demands. With a menu of service that is tailored to suit your needs, you get additional resources and specialist skills to help you maintain peak performance of your IT. Offered as annual credits, you can plan your budgets while proactively responding to your dynamic business.

HPE Education Services

Keep your IT staff trained making sure they have the right skills to deliver on your business outcomes. Book on a class today and learn how to get the most from your technology investment. <http://www.hpe.com/ww/learn>

Pre-configured Models

HPE Support Center

The HPE Support Center is a personalized online support portal with access to information, tools and experts to support HPE business products. Submit support cases online, chat with HPE experts, access support resources or collaborate with peers.

Learn more <http://www.hpe.com/support/hpesc>.

The HPE Support Center Mobile App* allows you to resolve issues yourself or quickly connect to an agent for live support. Now, you can get access to personalized IT support anywhere, anytime.

HPE Insight Remote Support and HPE Support Center are available at no additional cost with a HPE warranty, HPE Support Service or HPE contractual support agreement.

NOTE: *HPE Support Center Mobile App is subject to local availability.

For more information: <http://www.hpe.com/services>.

NOTE: HPE ProLiant DL385 Gen10 Server is covered under the HPE Service Contract applied to the HPE ProLiant Server. No separate HPE support services need to be purchased.

Warranty and Support Services will extend to include HPE options configured with your server or storage device. The price of support service is not impacted by configuration details. HPE sourced options that are compatible with your product will be covered under your server support at the same level of coverage allowing you to upgrade freely. Installation for HPE options is available as needed. To keep support costs low for everyone, some high value options will require additional support. Additional support is only required on select high value workload accelerators, fibre switches, InfiniBand and UPS batteries over 12KVA. See the specific high value options that require additional support [here](#).

Parts and Materials

Hewlett Packard Enterprise will provide HPE-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements.

Parts and components that have reached their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual, product QuickSpecs, or the technical product data sheet will not be provided, repaired, or replaced as part of these services.

The defective media retention service feature option applies only to Disk or eligible SSD/Flash Drives replaced by Packard Enterprise due to malfunction.

Pre-configured Models

| | Entry Model | Entry Model | Performance Model | Solution Model |
|-----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|
| [SKU Number] | P16690-xx1 | P16692-xx1 | P16694-xx1 | P16693-xx1 |
| Model Name | HPE ProLiant DL385 Gen10 7262 3.2GHz 8-core 1P 16GB-R 12LFF 800W RPS Server | HPE ProLiant DL385 Gen10 7262 3.2GHz 8-core 1P 16GB-R 8SFF 800W RPS Server | HPE ProLiant DL385 Gen10 7302 3.0GHz 16-core 1P 16GB-R 8SFF 800W RPS Server | HPE ProLiant DL385 Gen10 7452 2.2GHz 32-core 1P 16GB-R 24SFF 800W RPS Server |
| Processor | 7262 (8-Core, 3,2 GHz, 155W) | 7262 (8-Core, 3,2 GHz, 155W) | 7302 (16-Core, 2,8 GHz, 155W) | 7452 (32-Core, 2,2GHz, 155W) |
| Number of Processors | One processor | One processor | One processor | One processor |
| Memory | 16 GB RDIMM DR 2933 MT/s (1x 16 GB) | 16 GB RDIMM DR 2933 MT/s (1x 16 GB) | 16 GB RDIMM DR 2933 MT/s (1x 16 GB) | 16 GB RDIMM DR 2933 MT/s (1x 16 GB) |
| Network Controller | HPE 1Gb Ethernet 4-Port 336FLR Adapter plus optional HPE FlexibleLOM or stand up card | HPE 1Gb Ethernet 4-Port 336FLR Adapter plus optional HPE FlexibleLOM or stand up card | HPE 1Gb Ethernet 4-Port 336FLR Adapter plus optional HPE FlexibleLOM or stand up card | HPE 1Gb Ethernet 4-Port 336FLR Adapter plus optional HPE FlexibleLOM or stand up card |
| Storage Controller | P816i-a NOTE: 16-Port modular Smart Array. NOTE: Smart Storage battery included. | P408i-a NOTE: 8-Port modular Smart Array. NOTE: Smart Storage battery included. | P408i-a NOTE: 8-Port modular Smart Array. NOTE: Smart Storage battery included. | P408i-a NOTE: 8-Port modular Smart Array. NOTE: Smart Storage battery included. |
| Hard Drive | None ship as standard | None ship as standard | None ship as standard | None ship as standard |
| Internal Storage | 12 LFF chassis | 8 SFF Chassis | 8 SFF Chassis | 24 SFF Chassis |
| Optical Drive Bay | Optional via Universal Media Bay (included) | Optional Universal Media Bay (included) | Optional Universal Media Bay (included) | Optional Universal Media Bay (included) |
| Optical Drive | None ship as standard | None ship as standard | None ship as standard | None ship as standard |
| PCI-Express Slots | 3-slots (x8, x16, x8) as standard | 3-slots (x8, x16, x8) as standard | 3-slots (x8, x16, x8) as standard | 3-slots (x8, x16, x8) as standard |
| Power Supply | 1x 800W HPE FlexSlot Power Supply | 1x 800W HPE FlexSlot Power Supply | 1x 800W HPE FlexSlot Power Supply | 1x 800W HPE FlexSlot Power Supply |
| Fans | 6-High Performance fans | 4-standard fans | 4-standard fans | 6-High Performance fans |
| Management | Default: HPE iLO Standard with Intelligent Provisioning, HPE OneView Standard (requires download) Optional (require licenses): HPE iLO Advanced, HPE iLO Advanced Premium Security Edition, HPE OneView Advanced | | | |
| Energy Star | 2.1 certified | | | |
| Form Factor | 2U Rack, Easy Install rails without CMA | | | |
| Warranty | 3-year parts, 3-year labor, 3-year onsite support with next business day response. | | | |

Pre-configured Models

| Entry Models | | | |
|-----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|
| [SKU Number] | 878712-xx1 | P11747-xx1 | 878714-xx1 |
| Model Name | HPE ProLiant DL385 Gen10 7251 1P 16GB-R E208i-a 8LFF SATA 500W PS Entry Server | HPE ProLiant DL385 Gen10 7251 2.1GHz 8-core 1P 16GB-R P408i-a 8SFF 500W PS Server | HPE ProLiant DL385 Gen10 7251 1P 16GB-R E208i-a 8SFF SATA 500W PS Entry Server |
| Processor | 7251 (8-Core, 2.1 GHz, 120W) | 7251 (8-Core, 2.1 GHz, 120W) | 7251 (8-Core, 2.1 GHz, 120W) |
| Number of Processors | One processor | One processor | One processor |
| Memory | 16 GB RDIMM DR 2600 MT/s (1x 16 GB) | 16 GB RDIMM DR 2600 MT/s (1x 16 GB) | 16 GB RDIMM DR 2600 MT/s (1x 16 GB) |
| Network Controller | HPE 1Gb Ethernet 4-Port 331i Adapter plus optional HPE FlexibleLOM or stand up card | HPE 1Gb Ethernet 4-Port 331i Adapter plus optional HPE FlexibleLOM or stand up card | HPE 1Gb Ethernet 4-Port 331i Adapter plus optional HPE FlexibleLOM or stand up card |
| Storage Controller | Embedded S100i for 2 x M.2 Connectors E208i-a NOTE: 8-Port modular Smart Array. | P408i-a NOTE: 8-Port modular Smart Array. NOTE: Smart Storage battery included. | Embedded S100i for 2 x M.2 Connectors E208i-a NOTE: 8-Port modular Smart Array. |
| Hard Drive | None ship as standard | None ship as standard | None ship as standard |
| Internal Storage | 8 LFF chassis, with 2 SFF bays optional (upgradeable to 15LFF with 4LFF mid and 3LFF rear + 2SFF rear) | 8 SFF Chassis (upgradeable to 24 SFF front + 6SFF rear) | 8 SFF Chassis (upgradeable to 24 SFF front + 6SFF rear) |
| Optical Drive Bay | Optional via Universal Media Bay (included) | Optional Universal Media Bay (included) | Optional Universal Media Bay (882097-B21) |
| Optical Drive | None ship as standard | None ship as standard | None ship as standard |
| PCI-Express Slots | 3-slots (x8, x16, x8) as standard | 3-slots (x8, x16, x8) as standard | 3-slots (x8, x16, x8) as standard |
| Power Supply | 1x 500W HPE FlexSlot Power Supply | 1x 500W HPE FlexSlot Power Supply | 1x 500W HPE FlexSlot Power Supply |
| Fans | 4-standard fans | 4-standard fans | 4-standard fans |
| Management | Default: HPE iLO Standard with Intelligent Provisioning, HPE OneView Standard (requires download) Optional (require licenses): HPE iLO Advanced, HPE iLO Advanced Premium Security Edition, HPE OneView Advanced | | |
| Energy Star | 2.1 certified | | |
| Form Factor | 2U Rack, Easy Install rails without CMA | | |
| Warranty | 3-year parts, 3-year labor, 3-year onsite support with next business day response. | | |

Pre-configured Models

| Entry Models | | |
|-----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|
| [SKU Number] | 878714-AA1 | P05887-xx1 |
| Model Name | HPE ProLiant DL385 Gen10 7251 2.1GHz 8-core 1P 8GB-R E208i-a 8SFF SATA 500W PS Entry CN Server | HPE ProLiant DL385 Gen10 7251 1P 16GB-R P408i-a 8SFF 500W RPS Solution Server |
| Processor | 7251 (8-Core, 2.1 GHz, 120W) | 7251 (8-Core, 2.1 GHz, 120W) |
| Number of Processors | One processor | One processor |
| Memory | 8 GB RDIMM DR 2600 MT/s (1x 8 GB) | 16 GB RDIMM DR 2600 MT/s (1x 16 GB) |
| Network Controller | HPE 1Gb Ethernet 4-Port 331i Adapter plus optional HPE FlexibleLOM or stand up card | HPE 1Gb Ethernet 4-Port 331i Adapter plus optional HPE FlexibleLOM or stand up card |
| Storage Controller | Embedded S100i for 2 x M.2 Connectors E208i-a NOTE: 8-Port modular Smart Array. | P408i-a NOTE: 8-Port modular Smart Array. NOTE: Smart Storage battery included. |
| Hard Drive | None ship as standard | None ship as standard |
| Internal Storage | 8 SFF Chassis (upgradeable to 24 SFF front + 6SFF rear) | 8 SFF chassis, with 2 SFF bays optional (upgradeable to 15LFF with 4LFF mid and 3LFF rear + 2SFF rear) |
| Optical Drive Bay | Optional Universal Media Bay (882097-B21) | Optional via Universal Media Bay (included) |
| Optical Drive | None ship as standard | None ship as standard |
| PCI-Express Slots | 3-slots (x8, x16, x8) as standard | 3-slots (x8, x16, x8) as standard |
| Power Supply | 1x 500W HPE FlexSlot Power Supply | 2x 500W HPE FlexSlot Power Supply |
| Fans | 4-standard fans | 4-standard fans |
| Management | Default: HPE iLO Standard with Intelligent Provisioning, HPE OneView Standard (requires download) Optional (require licenses): HPE iLO Advanced, HPE iLO Advanced Premium Security Edition, HPE OneView Advanced | |
| Energy Star | 2.1 certified | |
| Form Factor | 2U Rack, Easy Install rails without CMA | |
| Warranty | 3-year parts, 3-year labor, 3-year onsite support with next business day response. | |

Pre-configured Models

| Base Model | | | |
|-----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|
| [SKU Number] | 878716-xx1 | P11809-xx1 | 878718-xx1 |
| Model Name | HPE ProLiant DL385 Gen10 7251 1P 32GB-R P816i-a 12LFF SATA 800W PS Base Server | HPE ProLiant DL385 Gen10 7301 2.2GHz 16-core 1P 32GB-R P408i-a 8SFF 800W PS Server | HPE ProLiant DL385 Gen10 7301 1P 32GB-R P408i-a 8SFF SAS 500W PS Base Server |
| Processor | 7251 (8-Core, 2.1 GHz, 185W) | 7301 (16-Core, 2.2 GHz, 170W) | 7301 (16-Core, 2.2 GHz, 170W) |
| Number of Processors | One processor | One processor | One processor |
| Memory | 32 GB RDIMM DR 2666 MT/s (2x 16 GB) | 32 GB RDIMM DR 2600 MT/s (2x 16 GB) | 32 GB RDIMM DR 2600 MT/s (2x 16 GB) |
| Network Controller | HPE 1Gb Ethernet 4-Port 331i Adapter plus optional HPE FlexibleLOM or stand up card | HPE 1Gb Ethernet 4-Port 331i Adapter plus optional HPE FlexibleLOM or stand up card | HPE 1Gb Ethernet 4-Port 331i Adapter plus optional HPE FlexibleLOM or stand up card |
| Storage Controller | P816i-a NOTE: 16-Port modular Smart Array. NOTE: Smart Storage battery included. | P408i-a NOTE: 8-Port modular Smart Array. NOTE: Smart Storage battery included. | P408i-a NOTE: 8-Port modular Smart Array. NOTE: Smart Storage battery included. |
| Hard Drive | None ship as standard | None ship as standard | None ship as standard |
| Internal Storage | 12 LFF chassis (upgradeable to 19LFF with 4LFF mid and 3LFF rear + 2SFF) | 8 SFF Chassis (upgradeable to 24 SFF front + 6SFF rear) | 8 SFF Chassis (upgradeable to 24 SFF front + 6SFF rear) |
| Optical Drive Bay | Optional via Universal Media Bay (included) | Optional Universal Media Bay (882097-B21) | Optional Universal Media Bay (882097-B21) |
| Optical Drive | None ship as standard | None ship as standard | None ship as standard |
| PCI-Express Slots | 3-slots (x8, x16, x8) as standard | 3-slots (x8, x16, x8) as standard | 3-slots (x8, x16, x8) as standard |
| Power Supply | 1x 800W HPE FlexSlot power supply | 1x 800W HPE FlexSlot power supply | 1x 500W HPE FlexSlot power supply |
| Fans | 6-High Performance fans | 4-standard fans | 4-standard fans |
| Management | Default: HPE iLO Standard with Intelligent Provisioning, HPE OneView Standard (requires download) Optional (require licenses): HPE iLO Advanced, HPE iLO Advanced Premium Security Edition, HPE OneView Advanced | | |
| Energy Star | 2.1 certified | | |
| Form Factor | 2U Rack, Easy install rails with CMA | | |
| Warranty | 3-year parts, 3-year labor, 3-year onsite support with next business day response | | |

Pre-configured Models

| | SMB Base Model | Base Model |
|-----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------|
| [SKU Number] | P09707-xx1 | P09708-xx1 |
| Model Name | HPE ProLiant DL385 Gen10 7351 1P 32GB-R P408i-a 8SFF SAS 800W PS Base Server | HPE ProLiant DL385 Gen10 7551 1P 32GB-R P408i-a 8SFF SAS 800W PS Perf Server |
| Processor | 7351 (16-Core, 2.4GHz, 170W) | 7551 (32-Core, 2.0 GHz, 180W) |
| Number of Processors | One Processor | |
| Memory | 32 GB RDIMM SR 2666 MT/s (2x 16 GB) | |
| Network Controller | HPE 1Gb Ethernet 4-Port 331i Adapter plus optional HPE FlexibleLOM or stand up card | |
| Storage Controller | P408i-a NOTE: 8-Port modular Smart Array. NOTE: Smart Storage battery included. | |
| Hard Drive | None ship as standard | |
| Internal Storage | 8 SFF Chassis (upgradeable to 24 SFF front + 6SFF rear) | |
| Optical Drive Bay | Optional Universal Media Bay (882097-B21) | Universal Media Bay (882097-B21) |
| Optical Drive | None ship as standard | |
| PCI-Express Slots | 3-slots (x8, x16, x8) as standard | |
| Power Supply | 1x 800W HPE FlexSlot power supply | |
| Fans | 4-Standard fans | |
| Management | Default: HPE iLO Standard with Intelligent Provisioning, HPE OneView Standard (requires download) Optional (require licenses): HPE iLO Advanced, HPE iLO Advanced Premium Security Edition, HPE OneView Advanced | |
| Energy Star | 2.1 certified | |
| Form Factor | 2U Rack, Easy Install rails | |
| Warranty | 3-3-3 | |

Pre-configured Models

| | Base Model | Performance Model | High Performance Model |
|-----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|
| [SKU Number] | 878720-xx1 | 878722-xx1 | 878724-xx1 |
| Model Name | HPE ProLiant DL385 Gen10 7401 1P 32GB-R P408i-a 24SFF SAS 800W PS Base Server | HPE ProLiant DL385 Gen10 7451 2P 64GB-R P408i-a 8SFF SAS 2x800W PS Perf Server | HPE ProLiant DL385 Gen10 7451 2P 64GB-R P408i-a 24SFF SAS 2x800W PS Perf Server |
| Processor | 7401 (24-Core, 2.0GHz, 170W) | 7451 (24-Core, 2.3 GHz, 180W) | 7451 (24-Core, 2.0 GHz, 180W) |
| Number of Processors | One Processor | Two processors | Two processors |
| Memory | 32 GB RDIMM DR 2600 MT/s (2x 16 GB) | 64 GB RDIMM DR 2666 MT/s (2x 32 GB) | 64 GB RDIMM DR 2666 MT/s (2x 32 GB) |
| Network Controller | HPE 1Gb Ethernet 4-Port 331i Adapter plus optional HPE FlexibleLOM or stand up card | HPE 1Gb Ethernet 4-Port 331i Adapter plus HPE Ethernet 10/25 Gb 2-port 640FLR-SFP28 Adapter (817749-B21) | HPE 1Gb Ethernet 4-Port 331i Adapter plus HPE Ethernet 25 Gb 2-port 631FLR Adapter (817709-B21) |
| Storage Controller | P408i-a w/Expander NOTE: 8-Port modular Smart Array. NOTE: Smart Storage battery included. | P408i-a NOTE: 8-Port modular Smart Array. NOTE: Smart Storage battery included. | P408i-a w/Expander NOTE: 8-Port modular Smart Array. NOTE: Smart Storage battery included. |
| Hard Drive | None ship as standard | None ship as standard | None ship as standard |
| Internal Storage | 24 SFF Chassis | 8 SFF Chassis (upgradeable to 24 SFF front + 6SFF rear) | 24 SFF Chassis |
| Optical Drive Bay | Optional Universal Media Bay (882097-B21) | Universal Media Bay (882097-B21) | Universal Media Bay (882097- B21) |
| Optical Drive | None ship as standard | DVD-RW | DVD-RW |
| PCI-Express Slots | 3-slots (x8, x16, x8) as standard | 8 total: 3-slots (x8, x16, x8) as standard, plus 3 PCIe (x8, x16, x8), 2 PCIe (x8) Tertiary Riser Kit | 8 total: 3-slots (x8, x16, x8) as standard, plus 3 PCIe (x8, x16, x8), 2 PCIe (x8) Tertiary Riser Kit |
| Power Supply | 1x 800W HPE FlexSlot power supply | 2x 800W HPE FlexSlot power supply | 2x 800W HPE FlexSlot power supply |
| Fans | 6-High Performance fans | | |
| Management | Default: HPE iLO Standard with Intelligent Provisioning, HPE OneView Standard (requires download) Optional (require licenses): HPE iLO Advanced, HPE iLO Advanced Premium Security Edition, HPE OneView Advanced | Default: HPE iLO Advanced with Intelligent Provisioning, HPE OneView Standard (requires download) Optional (require licenses): HPE iLO Advanced Premium Security Edition, HPE OneView Advanced | |
| Energy Star | 2.1 certified | | |
| Form Factor | 2U Rack, Easy Install rails with CMA | | |
| Warranty | 3-3-3 | | |

Country Code Key

xx1 = B21 | Worldwide

NOTE: The -B21 WW SKU is to be ordered in all countries other than Japan.

xx1 = 291 | Japan

Core Options

This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an HPE approved configurator. Contact your local sales representative for information on configurable product offerings and requirements.

1. Factory Integrated Models must start with a CTO Server.
2. FIO indicates that this option is only available as a factory installable option.
3. All Factory Integrated Models will be populated with sufficient hard drive blanks based on the number of initial hard drives ordered with the server.
4. Some options may not be integrated at the factory. Contact your local sales representative for additional information.

Step 1: Base Configuration (choose one of the following configurable models)

| | | | | |
|------------------------------|----------------------------------------------------------------------------------------------------------------|--------------------------------------------|---------------------------------------------|---------------------------------------------|
| CTO Server | HPE ProLiant DL385 Gen10 8 LFF CTO Server | HPE ProLiant DL385 Gen10 12 LFF CTO Server | HPE ProLiant DL385 Gen10 8 SFF CTO Server | HPE ProLiant DL385 Gen10 24 SFF CTO Server |
| SKU Number | 878615-B21 | 878614-B21 | 878612-B21 | 878613-B21 |
| TAA SKU | 878619-B21 | 878618-B21 | 878616-B21 | 878617-B21 |
| Processor | Not included as standard | Not included as standard | Not included as standard | Not included as standard |
| DIMM Slots | 32-DIMM slots | 32-DIMM slots | 32-DIMM slots | 32-DIMM slots |
| Storage Controller | Embedded s100i SW RAID for 2 x M.2 SATA support, choice of HPE modular Smart Array and PCIe plug-in controller | | | |
| PCIe | Three standard in primary riser | | | |
| Drive Cage - included | 8 LFF | 12 LFF | 8 SFF | 24 SFF |
| Network Controller | HPE 1Gb Ethernet 4-Port 331i Adapter (if equipped) plus optional HPE FlexibleLOM or stand up card | | | |
| Fans | 6-Standard | 6-High Performance | 4-Standard | 6-Performance |
| Management | HPE iLO with Intelligent Provisioning (standard), iLO Advances and OneView (optional) | | | |
| USB | 1x 3.0 standard plus iLo front service port | None as standard | 1x 3.0 standard plus iLo front service port | 1x 3.0 standard plus iLo front service port |

NOTE: HPE offers multiple Trade Agreement Act (TAA) compliant configurations to meet the needs of US Federal Government customers. These products are either manufactured or substantially transformed in a designated country. TAA compliance is only provided when HPE options are included as part of factory integrated orders (CTO).

NOTE: TAA chassis are only orderable in North America and Canada.

NOTE: The HPE ProLiant DL385 Gen10 12 LFF CTO Server ships with the cable required for the P816i-a installation.

NOTE: The cables that come standard with the 8SFF chassis for BOX3 work for the first 8 drives, and are connected to the E208 or the P408. When the 8SFF drive cage for BOX2 or BOX1 is ordered, the cables come with the drive cage kits.

NOTE: All CTO servers are Energy Star 2.1 compliant.

NOTE: 4x 1 embedded LOM is not equipped on new boards for 7xx2 series processor

Configuration Information

| | | | | |
|-------------------------------|---------------------|--------------------|-------------------|--------------------|
| CTO Server | 8 SFF CTO Chassis | 24 SFF CTO Chassis | 8 LFF CTO Chassis | 12 LFF CTO Chassis |
| Included Drive Cage | 8 SFF SAS/SATA | 3x 8 SFF SAS/SATA | 8 LFF + UMB | 12 LFF Chassis |
| Additional drive cages | - | - | - | - |
| Universal Media Bay | 1 Optional | Not available | 1 Included | Not available |
| ODD | 1 Optional with UMB | Not available | 1 Optional | Not available |
| 8 SFF Drive Cage | Up to 2 Optional | Not available | Not available | Not available |
| 8 NVME/SAS Bay | Up to 3 Optional | Not available | Not available | Not available |
| 8 NVME Cage | Up to 3 Optional | Not available | Not available | Not available |
| 2 SFF SAS/SATA (Front) | 1 Optional with UMB | Not available | 1 Optional | Not available |
| 2 SFF SAS/SATA (Rear) | 1 Optional | 1 Optional | 1 Optional | 1 Optional |
| 2 NVMe (Front) | 1 Optional with UMB | Not available | 1 Optional | Not available |
| 4 LFF Mid-plane | Not available | Not available | 1 Optional | 1 Optional |
| 3 LFF Rear | Not available | Not available | 1 Optional | 1 Optional |

NOTE: This applies to CTO configurations, field upgrades may differ depending field configuration.

NOTE: 3x 8 NVMe option on SFF requires the second processor be installed and I/O cards are limited to ALOM options.

Step 2a: Choose Required Options – Processors (only one of the following unless otherwise noted)

Please select one –L21 processor required below.

For second processor, please select the same processor model with –B21 from Core Options – HPE Processors section.

For example: first processor, select 874752-L21 then for second processor, select 874752-B21.

NOTE: 8SFF CTO 1P models ship with 4 standard fans. The second processor option kit contains 2 additional fans. 12 LFF and 24 SFF CTO Servers ship with 6 High performance fans included; 8LFF CTO Servers ship with 6 Standard fans included. High performance fan kit is available to meet ambient temperature environments are required for rear drives or NVMe configurations. NVMe is limited to front install only.

NOTE: Mixing of 2 different processor models are NOT allowed.

NOTE: DDR4 memory speed will depend on the quantity and type of DIMMs installed.

NOTE: Processors with greater than 170W will ship with the High Performance heatsink.

NOTE: Processors with greater than 170W will require the High Performance fan kit.

Processor Option Kits

AMD® EPYC® 7xx2 Generation Processor Family

HPE DL385 Gen10 AMD EPYC 7702 (2.0GHz/64-core/200W) FIO Processor Kit Required Processor
P16636-L21

NOTE: Ships with High Performance Heatsink.

HPE DL385 Gen10 AMD EPYC 7502 (2.5GHz/32-core/180-200W) FIO Processor Kit P16638-L21

NOTE: Ships with High Performance Heatsink.

HPE DL385 Gen10 AMD EPYC 7402 (2.8GHz/24-core/180-200W) FIO Processor Kit P16640-L21

NOTE: Ships with High Performance Heatsink.

HPE DL385 Gen10 AMD EPYC 7452 (2.3GHz/32-core/155-180W) FIO Processor Kit P16642-L21

NOTE: Ships with Standard Heatsink.

HPE DL385 Gen10 AMD EPYC 7302 (3.0GHz/16-core/155-180W) FIO Processor Kit P16643-L21

NOTE: Ships with Standard Heatsink.

HPE DL385 Gen10 AMD EPYC 7262 (3.2GHz/8-core/155-180W) FIO Processor Kit P16645-L21

NOTE: Ships with Standard Heatsink.

HPE DL385 Gen10 AMD EPYC 7702 (2.0GHz/64-core/200W) Processor Kit P16636-B21

NOTE: Ships with High Performance Heatsink.

Configuration Information

| | |
|-----------------------------------------------------------------------------------------------------------------------------|------------|
| HPE DL385 Gen10 AMD EPYC 7502 (2.5GHz/32-core/180-200W) Processor Kit NOTE: Ships with High Performance Heatsink. | P16638-B21 |
| HPE DL385 Gen10 AMD EPYC 7402 (2.8GHz/24-core/180-200W) Processor Kit NOTE: Ships with High Performance Heatsink. | P16640-B21 |
| HPE DL385 Gen10 AMD EPYC 7452 (2.3GHz/32-core/155-180W) Processor Kit NOTE: Ships with Standard Heatsink. | P16642-B21 |
| HPE DL385 Gen10 AMD EPYC 7302 (2.8GHz/16-core/155-180W) Processor Kit NOTE: Ships with Standard Heatsink. | P16643-B21 |
| HPE DL385 Gen10 AMD EPYC 7262 (3.2GHz/8-core/155-180W) Processor Kit NOTE: Ships with Standard Heatsink | P16645-B21 |
| AMD® EPYC® 7xx1 Generation Processor Family | |
| HPE DL385 Gen10 AMD EPYC - 7601 (2.2GHz/32-core/180W) FIO Processor Kit NOTE: Ships with Performance Heatsink. | 881162-L21 |
| HPE DL385 Gen10 AMD EPYC - 7551 (2.0GHz/32-core/180W) FIO Processor Kit NOTE: Ships with Performance Heatsink. | 881163-L21 |
| HPE DL385 Gen10 AMD EPYC - 7501 (2GHz/32-core/155-170W) FIO Processor Kit NOTE: Ships with Standard Heatsink. | 881164-L21 |
| HPE DL385 Gen10 AMD EPYC - 7451 (2.3GHz/24-core/180W) FIO Processor Kit NOTE: Ships with Performance Heatsink. | 881165-L21 |
| HPE DL385 Gen10 AMD EPYC - 7401 (2GHz/24-core/155-170W) FIO Processor Kit NOTE: Ships with Standard Heatsink. | 881166-L21 |
| HPE DL385 Gen10 AMD EPYC 7371 (3.1GHz/16-core/180W) Processor Kit NOTE: Ships with Performance Heatsink. | P11520-B21 |
| HPE DL385 Gen10 AMD EPYC - 7351 (2.4GHz/16-core/155-170W) FIO Processor Kit NOTE: Ships with Standard Heatsink. | 881169-L21 |
| HPE DL385 Gen10 AMD EPYC - 7301 (2.2GHz/16-core/155-170W) FIO Processor Kit NOTE: Ships with Standard Heatsink. | 881170-L21 |
| HPE DL385 Gen10 AMD EPYC - 7281 (2.1GHz/16-core/155-170W) FIO Processor Kit NOTE: Ships with Standard Heatsink. | P00645-L21 |
| HPE DL385 Gen10 AMD EPYC 7261 (2.5GHz/8-core/155-170W) Processor Kit NOTE: Ships with Standard Heatsink. | P06047-B21 |
| HPE DL385 Gen10 AMD EPYC - 7251 (2.1GHz/8-core/120W) FIO Processor Kit NOTE: Ships with Standard Heatsink. | 881171-L21 |

Step 2b: Choose Memory Options

Please select one or more memory from below.

For new Gen10 memory population rule whitepaper and optimal memory performance guidelines, please go

to: <http://www.hpe.com/docs/amd-population-rules>

For Gen10 memory speed table, please go to: <http://www.hpe.com/docs/amd-speed-tables>

NOTE: Memory DIMM availability with a server platform is dependent upon completion of certification testing.

NOTE: The maximum memory speed is a function of the memory type, memory configuration, and processor model.

Configuration Information

Registered DIMMs (RDIMMs)

| | |
|-------------------------------------------------------------------------------------|------------|
| HPE 8GB (1x8GB) Single Rank x8 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit | 838079-B21 |
| HPE 16GB (1x16GB) Dual Rank x8 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit | 838089-B21 |
| HPE 16GB (1x16GB) Single Rank x4 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit | 838081-B21 |
| HPE 32GB (1x32GB) Dual Rank x4 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit | 838083-B21 |
| HPE 64GB (1x64GB) Dual Rank x4 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit | P05592-B21 |
| HPE 16GB (1x16GB) Single Rank x4 DDR4-2933 CAS-21-21-21 Registered Smart | P19041-B21 |
| HPE 32GB (1x32GB) Dual Rank x4 DDR4-2933 CAS-21-21-21 Registered Smart | P19043-B21 |

NOTE: Mixing of x4 & x8 memory is not allowed

NOTE: 2933 MT/s DIMMs are only supported with AMD® EPYC® 7xx2 Series Processor Family

NOTE: 2666 MT/s DIMMs are only supported with AMD® EPYC® 7xx1 Series Processor Family.

NOTE: 2933 MT/s memory SKUs offer a transfer rate of 2933 MT/s at 1 DIMM per channel and 2666 MT/s at 2 DIMMs per channel

Load Reduced DIMMs (LRDIMMs)

| | |
|--------------------------------------------------------------------------------------------|------------|
| HPE 64GB (1x64GB) Quad Rank x4 DDR4-2666 CAS-19-19-19 Load Reduced Smart Memory Kit | 838085-B21 |
| HPE 128GB (1x128GB) Octal Rank x4 DDR4-2666 CAS-22-19-19 3DS Load Reduced Smart Memory Kit | 838087-B21 |

Step 2c: Choose Power Supplies

Select one or two power supplies from below.

NOTE: Mixing of 2 different power supplies is NOT allowed.

HPE Flex Slot Power Supplies

| | |
|--------------------------------------------------------------------|------------|
| HPE 500W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit | 865408-B21 |
| HPE 800W Flex Slot Titanium Hot Plug Low Halogen Power Supply Kit | 865438-B21 |
| HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit | 865414-B21 |
| HPE 800W Flex Slot -48VDC Hot Plug Low Halogen Power Supply Kit | 865434-B21 |
| HPE 800W Flex Slot Universal Hot Plug Low Halogen Power Supply Kit | 865428-B21 |
| HPE 1600W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit | 830272-B21 |

NOTE: Select one or more power supplies.

NOTE: 1600W Power supplies only support high line voltage (200VAC to 240VAC).

NOTE: Prior to making a power supply selection it is highly recommended that the HPE Power Advisor is run to determine the right size power supply for your server configuration. The HPE Power Advisor is located at:

<http://www.hpe.com/info/hppoweradvisor>.

NOTE: All power supplies in a server should match. Mixing Power Supplies is not supported.

NOTE: HPE ProLiant servers ship with an IEC-IEC power cord used for rack mounting with Power Distribution Units (PDUs). Visit [HPE power cords](#) for a full list of optional power cords.

Step 3: Choose Additional Factory Integratable Options

One of the following from each list may be selected if desired at time of factory integration

HPE Unique Options

NOTE: DL385 has support for 4x NVME drives when the second CPU is selected. NVME cable 871827-B21 is required and supports 2 drives each.

| | |
|------------------------------------------------|------------|
| HPE DL38X Gen10 Slot 1/2 x16/x16 FIO Riser Kit | 871674-B21 |
|------------------------------------------------|------------|

NOTE: Slot 1 or 2 in Primary location.

NOTE: Supports Full Height and Full length cards.

NOTE: Bus width x16, x16, Connector Width x16, x16.

Configuration Information

| | |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| HPE DL38X Gen10 x16/x16 GPU Slot2/3 FIO Riser Kit | 871676-B21 |
| NOTE: Primary Riser, Connector in slot 2 & 3 for GPU support. | |
| NOTE: Supports Full Height and Full length cards. | |
| NOTE: Bus width x16, x16, Connector Width x16, x16. | |
| HPE DL38X Gen10 4 NVMe Box 1 FIO Option | 878186-B21 |
| HPE DL38X Gen10 x8/x8/x8 1-port 2 NVMe Slim SAS FIO Riser Kit | 871673-B21 |
| NOTE: Supports 3x 8 and 1-port for NVMe. | |
| NOTE: Supports Full Height and half-length cards. | |
| NOTE: Bus width x8, x8, x8 Connector Width x8, x8, x8. | |
| HPE DL38X Gen10 2 NVMe FIO Option | 878189-B21 |
| NOTE: This is a factory integrated only option. | |
| NOTE: This will connect 2 SFF cage installed in the front of the chassis to NVMe. | |
| NOTE: This supports NVMe only, if desired, to maintain SATA drive compatibility the 3 POS cable kit must also be selected (882100-B21). | |
| HPE DL380X/Apollo 6500 Gen10 6+2 NVMe FIO Option | 878192-B21 |
| NOTE: This is a factory integrated only option. | |
| NOTE: Indicates the cage will also have an NVMe connection. NOTE: When NVMe is selected, the SAS/SATA will no longer function unless the controller selection supports it, or the 3POS cable is selected for S100i connection. | |
| HPE DL38X Gen10 8 SFF Front Cage Removal FIO Option | 873763-B21 |
| NOTE: This is a factory integrated only option. | |
| NOTE: Will remove the Primary 8SFF cage in Box 3 of the 8SFF and replace with a Box blank. | |
| HPE DL38X Gen10 Primary Riser Removal FIO Option | 873766-B21 |
| NOTE: This is a factory integrated only option. | |
| NOTE: Will remove the Primary shipping PCIe riser. | |
| HPE Legacy FIO Mode Setting | 758959-B22 |
| NOTE: UEFI is the default, this FIO part can be used for CTO to enable Legacy mode. | |
| HPE Smart Memory Fast Fault Tolerance FIO Setting | 875293-B21 |
| NOTE: Fast Fault Tolerance is a new feature in Gen10 server memory that enables the system to boot with full memory performance while monitoring for DRAM device failures. | |
| HPE DL38X Gen10 3x16 Prim GPU FIO Kit | P14373-B21 |
| HPE DL38X Gen10 3x16 Sec GPU FIO Kit | P14374-B21 |

Step 4: Choose additional options for Factory Integration from Core and Additional Options sections below

Core Options

NOTE: Some options may not be integrated at the factory. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an HPE approved configurator. Contact your local sales representative for additional information.

HPE Unique Options

| | |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| HPE DL38X NVMe 8 Solid State Drive Express Bay Enablement Kit | 826689-B21 |
| NOTE: This option provides support for up to 8 NVMe drives, and can only be populated in Box 1, Box 2 and Box 3 of the SFF chassis. | |
| NOTE: The HPE DL385 Gen10 High Performance fan kit is required for NVMe support (867810-B21). | |
| NOTE: The HPE DL38X Gen10 4-port 8 NVMe SlimSAS Riser (867807-B21) is required to support this. | |
| NOTE: If BOX 1, 2 and 3 are populated for full 24 drive NVMe support this requires 3 risers (1st 867807-B21, 2nd 873732-B21, & 3rd 867808-B21) and the on board NVMe connections with 2x NVMe cable (871827-B21). | |
| NOTE: There are limitations on GPU support with the NVMe bay installed. | |
| HPE DL385 Gen10 Universal Media Bay | 882097-B21 |
| NOTE: The HPE DL385 Gen10 Universal Media bay provides front Display Port and 2xUSB 2.0; plus support for 2x SFF front drives or 2 NVMe front drives (826687-B21 and NVMe riser required see note below) and ODD support (Not included); and can only be located in Box1 in either an 8 SFF or 8+8 SFF model. | |
| NOTE: This is a SFF model option only. | |
| NOTE: For support of the 2 NVMe drives this will require the addition of the HPE DL38X Gen10 x8/x8/x8 1-port 2 NVMe SlimSAS Riser (867806-B21) for 1P configurations. | |
| NOTE: For 2P configurations the HPE DL38X Gen10 2-port 4 NVMe SlimSAS Riser (867808-B21) is needed or the NVMe cable (871827-B21) with the on board NVMe connections may be used. | |
| HPE DL38X Gen10 Premium 6 SFF SAS/SATA + 2 NVMe or 8 SFF SAS/SATA Bay Kit | 826690-B21 |
| NOTE: This kit can be supported in Box 1, 2 or 3 and provides support for up to 8 SFF SAS/SATA or 6. SAS/SATA + 2 NVMe drives per Box. | |
| NOTE: With NVMe drives a specific riser is required for 1P. 2P enables the on board NVMe connection with the NVMe cable 871827-B21 or this can be enabled with NMVe risers. | |
| NOTE: When adding to Box 1 the addition of the High Performance Fan kit (867810-B21) is required | |
| HPE DL385 Gen10 High Performance Heatsink Kit | 882098-B21 |
| NOTE: Required for GPU installations. | |
| NOTE: Processor kits above 170W include a High Performance Heatsink. | |
| HPE DL38X Gen10 High Performance Temperature Fan Kit | 867810-B21 |
| NOTE: This kit is also required to support GPUs configurations. | |
| NOTE: This is required for NVMe configurations. | |
| NOTE: This kit provides maximum cooling for your Server. | |
| NOTE: This kit is required when Box 1, 2 and 3 are populated. | |
| HPE DL38X Gen10 2SFF HDD SAS/SATA Riser Kit | 826688-B21 |
| NOTE: 2 SFF in the rear is only supported with a 24 SFF model or 12 LFF model. | |
| NOTE: In the rear this leaves 1x16 slot accessible. | |
| NOTE: Rear drives require the addition of the High Performance Fan kit (867810-B21) . | |
| HPE DL38X Gen10 2SFF Premium HDD Front NVMe or Front/Rear SAS/SATA Kit | 826687-B21 |
| NOTE: HPE DL38X Gen10 High Performance Temperature Fan Kit (867810-B21) | |
| NOTE: NVMe drives require the addition of an NVMe capable riser or a 2P configuration and the NVMe cable 871827-B21 for the on board NVMe connections. | |
| NOTE: To maintain SATA compatibility with NVMe connections, the 3 POS cable (882100-B21) must also be used. | |
| NOTE: Drive cage can be used in the rear of the chassis, but will not support NVMe drives rear. | |
| NOTE: Supports uFF drives. | |

Core Options

| | |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| HPE DL38X Gen10 8LFF Front 2NVMe HDD Bay Kit | 873781-B21 |
| NOTE: Supports 2 NVMe in the Universal Media bay (included) on the 8 LFF model. | |
| NOTE: For support of the 2 NVMe drives this will require the addition of the HPE DL38X Gen10 x8/x8/x8 1-port 2 NVMe SlimSAS Riser (867806-B21) for 1P configurations. | |
| NOTE: For 2P configurations the HPE DL38X Gen10 2-port 4 NVMe SlimSAS Riser (867808-B21) is needed or the NVMe cable 871827-B21 with the on board NVMe connections may be used. | |
| NOTE: NVMe drives require the addition of the High Performance Fan kit (867810-B21). | |
| HPE DL38X Gen10 12Gb SAS Expander Card Kit with Cables | 870549-B21 |
| NOTE: SAS expander to enable 24 SFF field upgrade. | |
| NOTE: Primary population in slot 3 of the primary riser. | |
| HPE DL3XX Gen10 Rear Serial Cable and Enablement Kit | 873770-B21 |
| HPE DL38X Gen10 8LFF Front 2SFF SAS/SATA HDD Kit | 867805-B21 |
| HPE DL385 Gen10 System Insight Display Kit | 882099-B21 |
| NOTE: Systems Insight Display no longer ships as standard but is available as a Factory Integrated or field upgrade option. | |

HPE Processors

Processor Option Kits

AMD® EPYC® 7xx2 Generation Processor Family

| | |
|-----------------------------------------------------------------------|------------|
| HPE DL385 Gen10 AMD EPYC 7702 (2.0GHz/64-core/200W) Processor Kit | P16636-B21 |
| NOTE: Ships with High Performance Heatsink. | |
| HPE DL385 Gen10 AMD EPYC 7502 (2.5GHz/32-core/180-200W) Processor Kit | P16638-B21 |
| NOTE: Ships with High Performance Heatsink. | |
| HPE DL385 Gen10 AMD EPYC 7402 (2.8GHz/24-core/180-200W) Processor Kit | P16640-B21 |
| NOTE: Ships with High Performance Heatsink. | |
| HPE DL385 Gen10 AMD EPYC 7452 (2.3GHz/32-core/155-180W) Processor Kit | P16642-B21 |
| NOTE: Ships with Standard Heatsink. | |
| HPE DL385 Gen10 AMD EPYC 7302 (2.8GHz/16-core/155-180W) Processor Kit | P16643-B21 |
| NOTE: Ships with Standard Heatsink. | |
| HPE DL385 Gen10 AMD EPYC 7262 (3.2GHz/8-core/155-180W) Processor Kit | P16645-B21 |
| NOTE: Ships with Standard Heatsink. | |

AMD® EPYC® 7xx1 Generation Processor Family

| | |
|-------------------------------------------------------------------------|------------|
| HPE DL385 Gen10 AMD EPYC - 7601 (2.2GHz/32-core/180W) Processor Kit | 881162-B21 |
| NOTE: Ships with Performance Heatsink. | |
| HPE DL385 Gen10 AMD EPYC - 7551 (2.0GHz/32-core/180W) Processor Kit | 881163-B21 |
| NOTE: Ships with Performance Heatsink. | |
| HPE DL385 Gen10 AMD EPYC - 7501 (2GHz/32-core/155-170W) Processor Kit | 881164-B21 |
| NOTE: Ships with Standard Heatsink. | |
| HPE DL385 Gen10 AMD EPYC - 7451 (2.3GHz/24-core/180W) Processor Kit | 881165-B21 |
| NOTE: Ships with Performance Heatsink. | |
| HPE DL385 Gen10 AMD EPYC - 7401 (2GHz/24-core/155-170W) Processor Kit | 881166-B21 |
| NOTE: Ships with Standard Heatsink. | |
| HPE DL385 Gen10 AMD EPYC - 7351 (2.4GHz/16-core/155-170W) Processor Kit | 881169-B21 |
| NOTE: Ships with Standard Heatsink. | |
| HPE DL385 Gen10 AMD EPYC - 7301 (2.2GHz/16-core/155-170W) Processor Kit | 881170-B21 |
| NOTE: Ships with Standard Heatsink. | |
| HPE DL385 Gen10 AMD EPYC - 7281 (2.1GHz/16-core/155-170W) Processor Kit | P00645-B21 |
| NOTE: Ships with Standard Heatsink. | |

Core Options

| | |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| HPE DL385 Gen10 AMD EPYC - 7251 (2.1GHz/8-core/120W) Processor Kit | 881171-B21 |
| NOTE: Ships with Standard Heatsink. | |
| HPE DL385 Gen10 AMD EPYC 7371 (3.1GHz/16-core/180W) Processor Kit | P11520-B21 |
| NOTE: Ships with Standard Heatsink. | |
| HPE DL385 Gen10 AMD EPYC 7261 (2.5GHz/8-core/155-170W) Processor Kit | P06047-B21 |
| NOTE: Ships with Standard Heatsink. | |
| NOTE: DDR4 memory speed will depend on the quantity and type of DIMMs installed. | |
| NOTE: The xxxxxx-L21 is the first processor shipped, the xxxxxx-B21 is the 2nd processor and ships with 2 additional fans for factory or field installation. | |
| NOTE: Processors above 170W use a High Performance Heatsink and the high performance fan kit (867810-B21). | |
| NOTE: Processors with greater than 170W do not include the fans as the selection of processors above 170W requires the High Performance fan kit that comes with 6 fans. | |

Memory Selection

To streamline the configuration process for HPE ProLiant Gen10 servers and to provide the best product availability, Hewlett Packard Enterprise recommends memory from the list located here: <http://hpe.com/products/recommend>. Best product availability is limited to US, Canada, and Latin America at this time.

HPE Memory

Registered DIMMs (RDIMMs)

| | |
|-------------------------------------------------------------------------------------|------------|
| HPE 8GB (1x8GB) Single Rank x8 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit | 838079-B21 |
| HPE 16GB (1x16GB) Dual Rank x8 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit | 838089-B21 |
| HPE 16GB (1x16GB) Single Rank x4 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit | 838081-B21 |
| HPE 32GB (1x32GB) Dual Rank x4 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit | 838083-B21 |
| HPE 64GB (1x64GB) Dual Rank x4 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit | P05592-B21 |

Load Reduced DIMMs (LRDIMMs)

| | |
|--------------------------------------------------------------------------------------------|------------|
| HPE 64GB (1x64GB) Quad Rank x4 DDR4-2666 CAS-19-19-19 Load Reduced Smart Memory Kit | 838085-B21 |
| HPE 128GB (1x128GB) Octal Rank x4 DDR4-2666 CAS-22-19-19 3DS Load Reduced Smart Memory Kit | 838087-B21 |

NOTE: Memory DIMM availability with a server platform is dependent upon completion of certification testing.

NOTE: The maximum memory speed is a function of the memory type, memory configuration, and processor model.

HPE Optical Drives

| | |
|---------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| HPE 9.5mm SATA DVD-ROM Optical Drive | 726536-B21 |
| NOTE: HPE DL385 Gen10 Universal Media Bay Kit (882097-B21) is required for this option on a SFF model. No support in 12 LFF or 24 SFF models. | |
| NOTE: Not supported anytime the 3 POS cable (882100-B21) is selected. | |
| HPE 9.5mm SATA DVD-RW Optical Drive | 726537-B21 |
| NOTE: HPE DL385 Gen10 Universal Media Bay Kit (882097-B21) is required for this option on a SFF model. No support in 12 LFF or 24 SFF models. | |
| NOTE: Not supported anytime the 3 POS cable (882100-B21) is selected. | |
| HPE Mobile USB DVD-RW Optical Drive | 701498-B21 |
| NOTE: This is only supported on USB 3.0 ports. | |

Core Options

HPE Drives

Enterprise - 12G SAS - SFF Drives

| | |
|--------------------------------------------------------------------------------------------|------------|
| HPE 300GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD | 870753-B21 |
| HPE 300GB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD | 872475-B21 |
| HPE 600GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD | 870757-B21 |
| HPE 600GB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD | 872477-B21 |
| HPE 900GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD | 870759-B21 |
| HPE 1.2TB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD | 872479-B21 |
| HPE 1.8TB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty 512e Digitally Signed Firmware HDD | 872481-B21 |
| HPE 2.4TB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty 512e Digitally Signed Firmware HDD | 881457-B21 |

Enterprise - 12G SAS - LFF Drives

| | |
|----------------------------------------------------------------------------------------|------------|
| HPE 300GB SAS 12G Enterprise 15K LFF (3.5in) SCC 3yr Wty Digitally Signed Firmware HDD | P04693-B21 |
| HPE 600GB SAS 12G Enterprise 15K LFF (3.5in) SCC 3yr Wty Digitally Signed Firmware HDD | P04695-B21 |

Midline - 12G SAS - SFF Drives

| | |
|-----------------------------------------------------------------------------------|------------|
| HPE 1TB SAS 12G Midline 7.2K SFF (2.5in) SC 1yr Wty Digitally Signed Firmware HDD | 832514-B21 |
| HPE 2TB SAS 12G Midline 7.2K SFF (2.5in) SC 1yr Wty 512e HDD | 765466-B21 |

Midline - 12G SAS - LFF Drives

| | |
|------------------------------------------------------------------------------------------------|------------|
| HPE 2TB SAS 12G Midline 7.2K LFF (3.5in) SC 1yr Wty Digitally Signed Firmware HDD | 872485-B21 |
| HPE 4TB SAS 12G Midline 7.2K LFF (3.5in) SC 1yr Wty Digitally Signed Firmware HDD | 872487-B21 |
| HPE 6TB SAS 12G Midline 7.2K LFF (3.5in) SC 1yr Wty 512e HDD | 861754-B21 |
| HPE 8TB SAS 12G Midline 7.2K LFF (3.5in) SC 1yr Wty 512e Digitally Signed Firmware HDD | 819201-B21 |
| HPE 10TB SAS 12G Midline 7.2K LFF (3.5in) SC 1yr Wty Helium 512e Digitally Signed Firmware HDD | 857644-B21 |
| HPE 12TB SAS 12G Midline 7.2K LFF (3.5in) SC 1yr Wty Helium 512e Digitally Signed Firmware HDD | 881779-B21 |
| HPE 14TB SAS 12G Midline 7.2K LFF (3.5in) SC 1yr Wty Helium 512e Digitally Signed Firmware HDD | P09153-B21 |

Midline - 6G SATA - SFF Drives

| | |
|----------------------------------------------------------------------------------------|------------|
| HPE 1TB SATA 6G Midline 7.2K SFF (2.5in) SC 1yr Wty Digitally Signed Firmware HDD | 655710-B21 |
| HPE 2TB SATA 6G Midline 7.2K SFF (2.5in) SC 1yr Wty 512e Digitally Signed Firmware HDD | 765455-B21 |

Midline - 6G SATA - LFF Drives

| | |
|------------------------------------------------------------------------------------------------|------------|
| HPE 1TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty HDD | 861691-B21 |
| HPE 2TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty Digitally Signed Firmware HDD | 872489-B21 |
| HPE 4TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty Digitally Signed Firmware HDD | 872491-B21 |
| HPE 6TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty 512e HDD | 861750-B21 |
| HPE 8TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty 512e Digitally Signed Firmware HDD | 819203-B21 |
| HPE 10TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty Helium 512e Digitally Signed Firmware HDD | 857648-B21 |
| HPE 12TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty Helium 512e Digitally Signed Firmware HDD | 881785-B21 |
| HPE 14TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty Helium 512e Digitally Signed Firmware HDD | P09163-B21 |

SSD Selection

To streamline the configuration process for HPE ProLiant Gen10 servers and to provide the best product availability, HPE recommends SSDs from the list located here: <http://www.hpe.com/products/recommend>.

Read Intensive - 12G SAS - SFF - Solid State Drives

| | |
|----------------------------------------------------------------------------------------|------------|
| HPE 960GB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | P06584-B21 |
| HPE 960GB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | P04517-B21 |
| HPE 960GB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | 872390-B21 |
| HPE 1.92TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | P06586-B21 |
| HPE 1.92TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | P04519-B21 |
| HPE 1.92TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | 872392-B21 |
| HPE 3.84TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | P06588-B21 |
| HPE 3.84TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | P04521-B21 |

Core Options

Read Intensive - 12G SAS - SFF - Solid State Drives

| | |
|----------------------------------------------------------------------------------------|------------|
| HPE 3.84TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | 872394-B21 |
| HPE 3.84TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | 875330-B21 |
| HPE 7.68TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | P06590-B21 |
| HPE 7.68TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | P04523-B21 |
| HPE 7.68TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | 870144-B21 |
| HPE 15.3TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | P06592-B21 |
| HPE 400GB SAS 12G Write Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | 873351-B21 |
| HPE 15.3TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | 870148-B21 |

Mixed Use - 12G SAS - SFF - Solid State Drives

| | |
|----------------------------------------------------------------------------------|------------|
| HPE 400GB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | P04525-B21 |
| HPE 400GB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | P09088-B21 |
| HPE 800GB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | P04527-B21 |
| HPE 800GB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | P09090-B21 |
| HPE 1.6TB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | P04533-B21 |
| HPE 1.6TB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | P09092-B21 |
| HPE 1.6TB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | 873365-B21 |
| HPE 3.2TB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | P04537-B21 |
| HPE 3.2TB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | P09094-B21 |
| HPE 6.4TB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | P04539-B21 |
| HPE 6.4TB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | P09096-B21 |

Write Intensive - 12G SAS - SFF - Solid State Drives

| | |
|----------------------------------------------------------------------------------------|------------|
| HPE 400GB SAS 12G Write Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | P04541-B21 |
| HPE 400GB SAS 12G Write Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | P09098-B21 |
| HPE 400GB SAS 12G Write Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | 873351-B21 |
| HPE 800GB SAS 12G Write Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | P04543-B21 |
| HPE 800GB SAS 12G Write Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | P09100-B21 |
| HPE 800GB SAS 12G Write Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | 873355-B21 |
| HPE 1.6TB SAS 12G Write Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | P09102-B21 |
| HPE 1.6TB SAS 12G Write Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | P04545-B21 |
| HPE 3.2TB SAS 12G Write Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | P04547-B21 |

Mixed Use - 12G Value SAS - SFF - Solid State Drives

| | |
|---------------------------------------------------------------------------------------------|------------|
| HPE 960GB SAS 12G Mixed Use SC 3yr Wty Value SAS Digitally Signed Firmware SSD | P10448-B21 |
| HPE 1.92TB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Value SAS Digitally Signed Firmware SSD | P10454-B21 |
| HPE 3.84TB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Value SAS Digitally Signed Firmware SSD | P10460-B21 |

Read Intensive - 12G Value SAS - SFF - Solid State Drives

| | |
|--------------------------------------------------------------------------------------------------|------------|
| HPE 960GB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Value SAS Digitally Signed Firmware SSD | P10440-B21 |
| HPE 1.92TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Value SAS Digitally Signed Firmware SSD | P10442-B21 |
| HPE 3.84TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Value SAS Digitally Signed Firmware SSD | P10444-B21 |
| HPE 7.68TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Value SAS Digitally Signed Firmware SSD | P10446-B21 |

Mixed Use - 12G SAS - LFF - Solid State Drives

| | |
|-----------------------------------------------------------------------------------|------------|
| HPE 800GB SAS 12G Mixed Use LFF (3.5in) SCC 3yr Wty Digitally Signed Firmware SSD | P04529-B21 |
| HPE 800GB SAS 12G Mixed Use LFF (3.5in) LPC 3yr Wty Digitally Signed Firmware SSD | P04531-B21 |

Mixed Use - 12G Value SAS - LFF - Solid State Drives

| | |
|----------------------------------------------------------------------------------------------|------------|
| HPE 960GB SAS 12G Mixed Use LFF (3.5in) SCC 3yr Wty Value SAS Digitally Signed Firmware SSD | P10450-B21 |
| HPE 1.92TB SAS 12G Mixed Use LFF (3.5in) SCC 3yr Wty Value SAS Digitally Signed Firmware SSD | P10456-B21 |

Core Options

Mixed Use - 6G SATA - SFF - Solid State Drives

| | |
|-----------------------------------------------------------------------------------|------------|
| HPE 480GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | P07922-B21 |
| HPE 480GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | P05976-B21 |
| HPE 480GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | 872344-B21 |
| HPE 480GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Multi Vendor SSD | P18432-B21 |
| HPE 960GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | P07926-B21 |
| HPE 960GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | P05980-B21 |
| HPE 960GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Multi Vendor SSD | P18434-B21 |
| HPE 1.92TB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | P07930-B21 |

Mixed Use - 6G SATA - SFF - Solid State Drives

| | |
|-----------------------------------------------------------------------------------|------------|
| HPE 1.92TB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | P05986-B21 |
| HPE 1.92TB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Multi Vendor SSD | P18436-B21 |
| HPE 3.84TB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | P00896-B21 |
| HPE 3.84TB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | P05994-B21 |
| HPE 3.84TB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Multi Vendor SSD | P18438-B21 |

Mixed Use - 6G SATA - LFF - Solid State Drives

| | |
|------------------------------------------------------------------------------------|------------|
| HPE 480GB SATA 6G Mixed Use LFF (3.5in) SCC 3yr Wty Digitally Signed Firmware SSD | P07924-B21 |
| HPE 960GB SATA 6G Mixed Use LFF (3.5in) SCC 3yr Wty Digitally Signed Firmware SSD | P07928-B21 |
| HPE 1.92TB SATA 6G Mixed Use LFF (3.5in) SCC 3yr Wty Digitally Signed Firmware SSD | P07932-B21 |

Read Intensive - 6G SATA - SFF - Solid State Drives

| | |
|---------------------------------------------------------------------------------------|------------|
| HPE 240GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | P04556-B21 |
| HPE 240GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | P05924-B21 |
| HPE 240GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Multi Vendor SSD | P18420-B21 |
| HPE 480GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | P06194-B21 |
| HPE 480GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | P05928-B21 |
| HPE 480GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Multi Vendor SSD | P18422-B21 |
| HPE 480GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | P04560-B21 |
| HPE 480GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | P04474-B21 |
| HPE 960GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | P04564-B21 |
| HPE 960GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | P06196-B21 |

Read Intensive - 6G SATA - SFF - Solid State Drives

| | |
|----------------------------------------------------------------------------------------|------------|
| HPE 960GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | P04476-B21 |
| HPE 960GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | P05932-B21 |
| HPE 960GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Multi Vendor SSD | P18424-B21 |
| HPE 1.92TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | P04566-B21 |
| HPE 1.92TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | P06198-B21 |
| HPE 1.92TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | P04478-B21 |
| HPE 1.92TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | P05938-B21 |
| HPE 1.92TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Multi Vendor SSD | P18426-B21 |
| HPE 3.84TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | P04480-B21 |
| HPE 3.84TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | P04570-B21 |
| HPE 3.84TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | P06200-B21 |
| HPE 3.84TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | P05946-B21 |
| HPE 3.84TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Multi Vendor SSD | P18428-B21 |
| HPE 7.68TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | P04482-B21 |
| HPE 7.68TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Multi Vendor SSD | P18430-B21 |

Core Options

Read Intensive - 6G SATA - SFF - Solid State Drives

| | |
|-----------------------------------------------------------------------------------------|------------|
| HPE 240GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | 875503-B21 |
| HPE 480GB SATA 6G Read Intensive LFF (3.5in) SCC 3yr Wty Digitally Signed Firmware SSD | P09687-B21 |
| HPE 960GB SATA 6G Read Intensive LFF (3.5in) SCC 3yr Wty Digitally Signed Firmware SSD | P09689-B21 |
| HPE 1.92TB SATA 6G Read Intensive LFF (3.5in) SCC 3yr Wty Digitally Signed Firmware SSD | P09693-B21 |

Mixed Use - 6G SATA - SFF - Solid State Drives

| | |
|-----------------------------------------------------------------------------------|------------|
| HPE 480GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | P09712-B21 |
| HPE 960GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | P09716-B21 |
| HPE 1.92TB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD | P09722-B21 |

Mixed Use - 6G SATA - LFF - Solid State Drives

| | |
|------------------------------------------------------------------------------------|------------|
| HPE 960GB SATA 6G Mixed Use LFF (3.5in) SCC 3yr Wty Digitally Signed Firmware SSD | P09718-B21 |
| HPE 1.92TB SATA 6G Mixed Use LFF (3.5in) SCC 3yr Wty Digitally Signed Firmware SSD | P09724-B21 |

Read Intensive - NVMe - SFF - Solid State Drives

| | |
|------------------------------------------------------------------------------------------------|------------|
| HPE 960GB NVMe x4 Lanes Read Intensive SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD | P10208-B21 |
| HPE 960GB NVMe x4 Lanes Read Intensive SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD | P07190-B21 |
| HPE 1.92TB NVMe x4 Lanes Read Intensive SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD | P10214-B21 |
| HPE 1.92TB NVMe x4 Lanes Read Intensive SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD | P10210-B21 |
| HPE 1.92TB NVMe x4 Lanes Read Intensive SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD | P07192-B21 |
| HPE 2TB NVMe x4 Lanes Read Intensive SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD | P13695-B21 |
| HPE 3.84TB NVMe x4 Lanes Read Intensive SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD | P10216-B21 |
| HPE 3.84TB NVMe x4 Lanes Read Intensive SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD | P10212-B21 |
| HPE 3.84TB NVMe x4 Lanes Read Intensive SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD | P07194-B21 |
| HPE 4TB NVMe x4 Lanes Read Intensive SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD | P13697-B21 |
| HPE 7.68TB NVMe x4 Lanes Read Intensive SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD | P10218-B21 |
| HPE 7.68TB NVMe x4 Lanes Read Intensive SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD | P07196-B21 |
| HPE 15.36TB NVMe x4 Lanes Read Intensive SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD | P07198-B21 |

Mixed Use - NVMe - SFF - Solid State Drives

| | |
|-----------------------------------------------------------------------------------------|------------|
| HPE 800GB NVMe x4 Lanes Mixed Use SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD | P07179-B21 |
| HPE 1.6TB NVMe x4 Lanes Mixed Use SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD | P10222-B21 |
| HPE 1.6TB NVMe x4 Lanes Mixed Use SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD | P07181-B21 |
| HPE 1.6TB NVMe x4 Lanes Mixed Use SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD | P13699-B21 |
| HPE 3.2TB NVMe x4 Lanes Mixed Use SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD | P10224-B21 |

Mixed Use - NVMe - SFF - Solid State Drives

| | |
|-----------------------------------------------------------------------------------------|------------|
| HPE 3.2TB NVMe x4 Lanes Mixed Use SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD | P07183-B21 |
| HPE 3.2TB NVMe x4 Lanes Mixed Use SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD | P13701-B21 |
| HPE 6.4TB NVMe x4 Lanes Mixed Use SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD | P10226-B21 |
| HPE 6.4TB NVMe x4 Lanes Mixed Use SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD | P07185-B21 |
| HPE 6.4TB NVMe x4 Lanes Mixed Use SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD | P13703-B21 |

Write Intensive - NVMe - SFF - Solid State Drives

| | |
|-----------------------------------------------------------------------------------------------|------------|
| HPE 375GB NVMe x4 Lanes Write Intensive SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD | 878014-B21 |
| HPE 750GB NVMe x4 Lanes Write Intensive SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD | P06952-B21 |

Read Intensive - M.2 - Solid State Drives

| | |
|--------------------------------------------------------------------------------------------------|------------|
| HPE Dual 480GB SATA 6G Read Intensive M.2 - UFF to SFF SCM 3yr Wty Digitally Signed Firmware SSD | P06609-B21 |
| HPE 480GB SATA 6G Read Intensive M.2 2280 3yr Wty Digitally Signed Firmware SSD | 875498-B21 |
| HPE 960GB SATA 6G Read Intensive M.2 2280 3yr Wty Digitally Signed Firmware SSD | 875500-B21 |

Core Options

Mixed Use - M.2 - Solid State Drives

| | |
|---------------------------------------------------------------------------------------------|------------|
| HPE Dual 240GB SATA 6G Mixed Use M.2 - UFF to SFF SCM 3yr Wty Digitally Signed Firmware SSD | P06607-B21 |
| HPE 240GB SATA 6G Mixed Use M.2 2280 3yr Wty Digitally Signed Firmware SSD | 875488-B21 |
| HPE 480GB SATA 6G Mixed Use M.2 2280 3yr Wty Digitally Signed Firmware SSD | 875490-B21 |
| HPE 960GB SATA 6G Mixed Use M.2 2280 3yr Wty Digitally Signed Firmware SSD | 875492-B21 |

Hard Drive Blank Kits

| | |
|-----------------------------------------|------------|
| HPE Universal SATA HHHL 3yr Wty M.2 Kit | 878783-B21 |
|-----------------------------------------|------------|

NOTE: This is a M.2 enablement standup card.

| | |
|--------------------------------------------|------------|
| HPE Large Form Factor Hard Drive Blank Kit | 666986-B21 |
| HPE Small Form Factor Hard Drive Blank Kit | 666987-B21 |

Hard Drive Kits

| | |
|----------------------------------------------|------------|
| HPE DL38X Gen10 3LFF Rear SAS/SATA Drive Kit | 826685-B21 |
|----------------------------------------------|------------|

NOTE: This is supported in the LFF model only.

NOTE: 3 LFF rear drives will consume the 2nd riser expansion slot.

| | |
|------------------------------------------------------------------|------------|
| HPE DL385 Gen10 4 Large Form Factor Mid-Plane Hard Drive Carrier | 882096-B21 |
|------------------------------------------------------------------|------------|

NOTE: Supported with both the 8 and 12 LFF model.

NOTE: With this mid-tray only single-wide (8.5-inch cards with connections or less) cards are supported.

NOTE: This drive does support hot-swap drives.

NOTE: This requires High Performance Fans (867810-B21).

| | |
|------------------------------------------------------------------------|------------|
| HPE DL38X Gen10 2SFF Premium HDD Front NVMe or Front/Rear SAS/SATA Kit | 826687-B21 |
|------------------------------------------------------------------------|------------|

NOTE: HPE DL38X Gen10 High Performance Temperature Fan Kit (867810-B21).

NOTE: NVMe drives require the addition of an NVMe capable riser, or a 2P configuration and the NVMe cable 871827-B21 for the on boards NVMe connection.

NOTE: To maintain SATA compatibility with NVMe connections, the 3 POS cable (882100-B21) must be used as well.

| | |
|---------------------------------------------|------------|
| HPE DL38X Gen10 2SFF HDD SAS/SATA Riser Kit | 826688-B21 |
|---------------------------------------------|------------|

NOTE: Supports 2 SFF rear in Riser1 or 2 location – max 2 supported SFF model.

NOTE: Supports 2 SFF rear in Riser1 or 2 location in LFF model. Note is 3 LFF rear option is selected maximum of one in riser 1 location.

NOTE: Supports uFF drives.

| | |
|---------------------------------------------------------------|------------|
| HPE DL38X NVMe 8 Solid State Drive Express Bay Enablement Kit | 826689-B21 |
|---------------------------------------------------------------|------------|

NOTE: This option provides support for up to 8 NVMe drives, and can be populated in all Boxes in the 8 SFF model.

NOTE: A maximum of 24 NVMe drives only are supported.

NOTE: This will require the HPE DL38X Gen10 4-port 8 NVMe SlimSAS Riser (867807-B21).

NOTE: For full 24 drive NVMe support this requires 3 risers; 1st (867807-B21), 2nd (873732-B21) & 3rd (867808-B21) and the on board NVMe connections with 2x NVMe cable (871827-B21).

NOTE: Supporting 24 NVMe limits I/O support to the ALOM slot.

| | |
|---------------------------------------------------------------------------|------------|
| HPE DL38X Gen10 Premium 6 SFF SAS/SATA + 2 NVMe or 8 SFF SAS/SATA Bay Kit | 826690-B21 |
|---------------------------------------------------------------------------|------------|

NOTE: This option provides supports for up to 8 SAS/SATA SFF drives or a combination of 6 SATA/SATA and 2 NVMe drives in the same cage, and can be populated in all Boxes in the SFF model.

NOTE: For support of the 2 NVMe drives this will require the addition of the HPE DL38X Gen10 x8/x8/x8 1-port 2 NVMe SlimSAS Riser (867806-B21) for 1P configurations. **NOTE:** For 2P configurations the HPE DL38X Gen10 2-port 4 NVMe SlimSAS Riser (867808-B21) or the NVMe cable (871827-B21) with the on board NVMe connections me be used.

NOTE: NVMe drives require the addition of the High Performance Fan kit (867810-B21).

| | |
|-----------------------------------------------|------------|
| HPE DL38X Gen10 SFF Box1/2 Cage/Backplane Kit | 826691-B21 |
|-----------------------------------------------|------------|

NOTE: Supports 8 SAS/SAFA SFF drives in Box 1 or 2 to a max of 24 SFF SAS/SATA front.

Core Options

HPE DL38X Gen10 8LFF Front 2NVMe HDD Bay Kit 873781-B21

NOTE: Supports 2 NVMe in the Universal Media bay (included) on the 8 LFF model.

NOTE: For support of the 2 NVMe drives this will require the addition of the HPE DL38X Gen10 x8/x8/x8 1-port 2 NVMe SlimSAS Riser (867806-B21) for 1P configurations.

NOTE: For 2P configurations the HPE DL38X Gen10 2-port 4 NVMe SlimSAS Riser (867808-B21) is needed or the NVMe cable (871827-B21) with the on board NVMe connections may be used.

NOTE: NVMe drives require the addition of the High Performance Fan kit (867810-B21).

Hard Drive Kits

HPE DL38X Gen10 8LFF Front 2SFF SAS/SATA HDD Kit 867805-B21

NOTE: For 2 SFF SAS/SATA in UMB on 8 LFF model only.

Media Bay Kits

HPE DL385 Gen10 Universal Media Bay 882097-B21

NOTE: The HPE DL385 Gen10 Universal Media bay provides front Display Port and 2xUSB 2.0; plus support for 2x SFF front drives or 2 NVMe front drives (826687-B21 and NVMe riser required see notes below)and ODD support (Not included); and can only be located in Box1 in either an 8 SFF or 8+8 SFF model.

NOTE: This is a SFF model option only.

NOTE: For support of the 2 NVMe drives this will require the addition of the HPE DL38X Gen10 x8/x8/x8 1-port 2 NVMe SlimSAS Riser (867806-B21) for 1P configurations.

NOTE: For 2P configurations the HPE DL38X Gen10 2-port 4 NVMe SlimSAS Riser (867808-B21) is needed or the NVMe cable (871827-B21) with the on board NVMe connections may be used.

HPE Networking

1 Gigabit Ethernet adapters

HPE Ethernet 1Gb 4-port 331T Adapter 647594-B21

HPE Ethernet 1Gb 4-port 366T Adapter 811546-B21

HPE Ethernet 1Gb 2-port 332T Adapter 615732-B21

HPE Ethernet 1Gb 2-port 361T Adapter 652497-B21

10 Gigabit Ethernet adapters

HPE Ethernet 10Gb 2-port 535T Adapter 813661-B21

HPE Ethernet 10Gb 2-port 521T Adapter 867707-B21

HPE Ethernet 10Gb 2-port 524SFP+ Adapter P08446-B21

HPE Ethernet 10Gb 2-port 548SFP+ Adapter P11338-B21

HPE Ethernet 10Gb 2-port 562SFP+ Adapter 727055-B21

HPE Ethernet 10Gb 2-port 562T Adapter 817738-B21

HPE Ethernet 10Gb 2-port 562FLR-T Adapter 817745-B21

25 Gigabit Ethernet adapters

HPE Ethernet 10/25Gb 2-port 631SFP28 Adapter 817718-B21

HPE Ethernet 10/25Gb 2-port 640SFP28 Adapter 817753-B21

HPE Ethernet 10/25Gb 2-port 621SFP28 Adapter 867328-B21

NOTE: 535T Adapter (813661-B21) is currently not supported with the AMD EPYC® 7xx2 Series Processor Family

NOTE: 631SFP28 Adapter (817718-B21) is currently not supported with the AMD EPYC® 7xx2 Series Processor Family

NOTE: 562SFP+ Adapter (727055-B21) is currently not supported with the AMD EPYC® 7xx2 Series Processor Family. Support will be available from October '19 onwards.

NOTE: The DL385 Gen10 ships with 4x 1 Gb Embedded (if equipped). It is not supported on new boards for 7xx2 series processors

NOTE: A minimum of two Gigabytes (2 GB) of server memory is required per each adapter.

NOTE: Direct Attach Cable (DAC) for copper environments or fiber transceivers and cables for fiber-optic environments must be purchased separately. Please see the related NIC QuickSpecs for Technical Specifications and additional information:

<https://www.hpe.com/us/en/product-catalog/servers/adapters/pip.models.hpe-storefabric-converged-network-adapters.4118472.html>

Core Options

100 Gigabit Ethernet adapters

HPE Ethernet 100Gb 1-port 842QSFP28 Adapter 874253-B21

200 Gigabit Ethernet adapters

HPE InfiniBand HDR/Ethernet 200Gb 1-port 940QSFP56 Adapter P06154-B21

FlexibleLOM adapters

HPE Ethernet 1Gb 4-port 331FLR Adapter 629135-B22

HPE Ethernet 1Gb 4-port 366FLR Adapter 665240-B21

HPE Ethernet 10Gb 2-port 535FLR-T Adapter 817721-B21

HPE FlexFabric 10Gb 4-port 536FLR-T Adapter 764302-B21

HPE Ethernet 10/25Gb 2-port 631FLR-SFP28 Adapter 817709-B21

NOTE: 535FLR-T Adapter (817721-B21) is not supported with the AMD EPYC® 7xx2 Series Processor Family at this point.

NOTE: 631FLR-SFP28 Adapter (817709-B21) is not supported with the AMD EPYC® 7xx2 Series Processor Family at this point.

FlexibleLOM adapters

HPE Ethernet 10/25Gb 2-port 640FLR-SFP28 Adapter 817749-B21

HPE Ethernet 10Gb 2-port 562FLR-SFP+ Adapter 727054-B21

HPE Ethernet 10/25Gb 2-port 622FLR-SFP28 Converged Network Adapter 867334-B21

NOTE: The DL385 Gen10 chassis ships with 4x 1 Gb embedded.(if equipped). It is not supported on new boards for 7xx2 series processors

NOTE: Only one FlexibleLOM can be added to the server. These options are upgradeable and can be changed from the original configuration after the server is shipped.

NOTE: Direct Attach Cable (DAC) for copper environments or fiber transceivers and cables for fiber-optic environments must be purchased separately. Please see the related NIC QuickSpecs for Technical Specifications and additional information:

NOTE: 622FLR-SFP28 adapters with FCoE used in conjunction with all Red Hat 7.x version OS's is not supported at this time

NOTE: 562FLR-SFP+ Adapter (727054-B21) is currently not supported with the AMD EPYC® 7xx2 Series Processor Family. Support will be available from October '19 onwards.

HPE InfiniBand

HPE InfiniBand FDR/Ethernet 10Gb/40Gb 2-port 544+FLR-QSFP Adapter 764285-B21

HPE InfiniBand FDR/Ethernet 40/50Gb 2-port 547FLR-QSFP Adapter 879482-B21

HPE InfiniBand EDR 100Gb 1-port 841QSFP28 Adapter 872725-B21

HPE InfiniBand EDR/Ethernet 100Gb 2-port 841QSFP28 Adapter 872726-B21

HPE InfiniBand FDR/Ethernet 10Gb/40Gb 2-port 544+QSFP Adapter 764284-B21

HPE InfiniBand EDR/Ethernet 100Gb 1-port 840QSFP28 Adapter 825110-B21

HPE InfiniBand EDR/Ethernet 100Gb 2-port 840QSFP28 Adapter 825111-B21

HPE InfiniBand HDR/Ethernet 200Gb 1-port 940QSFP56 Adapter P06154-B21

HPE InfiniBand HDR PCIe3 Auxiliary Card with 350mm Cable Kit P06154-B23

HPE InfiniBand HDR100/Ethernet 100Gb 1-port 940QSFP56 Adapter P06250-B21

HPE InfiniBand HDR100/Ethernet 100Gb 2-port 940QSFP56 Adapter P06251-B21

HPE I/O Expansion Options

NOTE: For additional details on ProLiant DL Gen10 server risers please

visit: <https://www.hpe.com/h20195/v2/Getdocument.aspx?docname=a00043229enw>

NOTE: The Primary Riser shipping default in the chassis is a x8 FH, FL, x16 FH, FL and x8 FH, HL.

NOTE: For a Secondary/Tertiary riser the second processor is required.

HPE DL38X Gen10 x16/x16 Riser Kit 826694-B21

NOTE: Slot 1 or 2 in Primary or Secondary location.

NOTE: Supports Full Height and Full length cards.

NOTE: Bus width x16, x16, Connector Width x16, x16.

Core Options

| | |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| HPE DL Gen10 x8/x16/x8 Riser Kit | 870548-B21 |
| NOTE: No M.2 support on this riser. | |
| NOTE: Supports Full Height, Half- length cards; Full Height, Full-length cards and Full Height, Half- length cards. | |
| NOTE: Bus width x8, x16, x8, Connector Width x8, x16, x8. | |
| HPE DL38X Gen10 4-port 8 NVMe Primary Slim SAS FIO Riser | 867807-B21 |
| NOTE: Riser supporting up to 8 NVMe drives in Primary location. | |
| NOTE: This can be connected to an 8SFF NVMe drive cage in box 3. | |
| NOTE: To achieve max 24 NVMe support, connect 8 NVMe drives to both the primary and secondary risers, 4 NVMe drives to the tertiary riser, and 4 NVMe drives the the on board connectors. | |
| HPE DL Gen10 x16/x16 GPU Riser Kit | 826704-B21 |
| NOTE: Primary or Secondary Riser, Connector in slot 2 & 3 for GPU support. | |
| NOTE: Supports Full Height and Full length cards. | |
| NOTE: Bus width x16, x16, Connector Width x16, x16. | |
| HPE DL38X Gen10 2SFF HDD SAS/SATA Riser Kit | 826688-B21 |
| NOTE: Premium bay supporting SFF SAS/SATA . | |
| NOTE: Available in Primary or Secondary Riser location. NOTE: Will leave 1 x16 Connector available in bottom slot. | |
| HPE DL38X Gen10 x8/x8/x8 1-port 2 NVMe SlimSAS Riser | 867806-B21 |
| NOTE: Supports NVMe drives in Primary or Secondary location. | |
| NOTE: Supports Full Height and half-length cards. | |
| NOTE: Bus width x8, x8, x8 Connector Width x8, x8, x8. | |
| HPE DL38X Gen10 2-port 4 NVMe SlimSAS Riser | 867808-B21 |
| NOTE: Supports up to 4 NVMe drives in Tertiary location. | |
| HPE DL38X Gen10 4-port 8 NVMe Secondary Slim SAS Riser | 873732-B21 |
| NOTE: Riser supporting up to 8 NVMe drives in Secondary location. | |
| HPE DL38X Gen10 2 x8 PCIe Tertiary Riser Kit | 875780-B21 |
| NOTE: Supports 2x 8 slots in the Tertiary location. | |
| HPE DL38X Gen10 x16 Tertiary Riser Kit | 826700-B21 |
| NOTE: Supports 1x 16 slot in the Tertiary location. | |
| NOTE: Supports Full Height and full-length card. | |
| NOTE: Bus width x16 Connector Width x16. | |
| NOTE: For additional details on ProLiant DL Gen10 server risers please visit: https://www.hpe.com/h20195/v2/Getdocument.aspx?docname=a00043229enw | |

Core Options

| Riser Information* | | | | | | | | | |
|--------------------|--------------------------------------------------------------|----------------|-----------|----------|------------------------|-------------|-------------|---------------------|-------------|
| Part number | Description | Riser position | | | Bus width (Gen3 lanes) | | | NVMe Direct Connect | |
| | | Primary | Secondary | Tertiary | Top slot | Middle Slot | Bottom slot | Ports | Drive count |
| n/a | This is the default riser in the chassis | D | N | N | x8 | x16 | x8 | | |
| 870548-B21 | HPE DL Gen10 x8/x16/x8 Riser Kit | D | O | N | x8 | x16 | x8 | | |
| 826704-B21 | HPE DL Gen10 x16/x16 GPU Riser Kit | O | O | N | 0 | x16 | x16 | | |
| 826694-B21 | HPE DL38X Gen10 x16/x16 Riser Kit | O | O | N | x16 | x16 | 0 | | |
| 867807-B21 | HPE DL38X Gen10 4-port 8 NVMe Primary SlimSAS Riser | O | N | N | 0 | 0 | 0 | 4 | 8 |
| 867808-B21 | HPE DL38X Gen10 2-port 4 NVMe SlimSAS Riser | N | N | O | 0 | 0 | 0 | 2 | 4 |
| 873732-B21 | HPE DL38X Gen10 4-port 8 NVMe Secondary SlimSAS Riser | N | O | N | 0 | 0 | 0 | 4 | 8 |
| 867806-B21 | HPE DL38X Gen10 x8/x8/x8 1-port 2 NVMe SlimSAS Riser | O | O | N | x8 | x8 | x8 | 1 | 2 |
| 871673-B21 | HPE DL38X Gen10 x8/x8/x8 1-port 2 NVMe SlimSAS FIO Riser Kit | O | N | N | x8 | x8 | x8 | 1 | 2 |
| 826688-B21 | HPE DL38X Gen10 2SFF HDD SAS/SATA Riser Kit | O | O | N | 0 | 0 | x16 | | |
| 826700-B21 | HPE DL38X Gen10 x16 Tertiary Riser Kit | N | N | O | x16 | 0 | 0 | | |
| 875780-B21 | HPE DL38X Gen10 2 x8 PCIe Tertiary Riser Kit | N | N | O | x8 | x8 | 0 | | |
| 871674-B21 | HPE DL38X Gen10 Slot 1/2 x16/x16 FIO Riser Kit | O | N | N | x16 | x16 | 0 | | |
| 871676-B21 | HPE DL38X Gen10 x16/x16 GPU Slot2/3 FIO Riser Kit | O | N | N | 0 | x16 | x16 | | |
| 826685-B21 | HPE DL38X Gen10 3LFF SAS/SATA Riser Kit | N | O | N | 0 | 0 | 0 | | |

NOTE:Y = supported; D = default on Chassis; O = optional; N = not supported or slot/connector not present.

HPE Power Supplies

HPE 500W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit 865408-B21

NOTE: Flex Slot Platinum power supplies support power efficiency of up to 94% and include a standard C-14 power inlet connector.

HPE 800W Flex Slot Titanium Hot Plug Low Halogen Power Supply Kit 865438-B21

NOTE: Flex Slot Titanium power supplies support power efficiency of up to 96% and include a standard C-14 power inlet connector.

HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit 865414-B21

NOTE: Flex Slot Platinum power supplies support power efficiency of up to 94% and include a standard C-14 power inlet connector.

HPE 800W Flex Slot -48VDC Hot Plug Low Halogen Power Supply Kit 865434-B21

NOTE: Flex Slot -48VDC power supplies support power efficiency of up to 94%.

Core Options

| | |
|--------------------------------------------------------------------|------------|
| HPE 800W Flex Slot Universal Hot Plug Low Halogen Power Supply Kit | 865428-B21 |
| HPE 1600W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit | 830272-B21 |

NOTE: Flex Slot universal power supplies support power efficiency of up to 94% and support both 277VAC/380VDC power inputs.

NOTE: Flex Slot Platinum Plus power supplies support power efficiency of up to 94% and include a C-14 power inlet connector that can support HPE Power Discovery Services (blue connector).

NOTE: Prior to making a power supply selection it is highly recommended that the HPE Power Advisor is run to determine the right size power supply for your server configuration. The HPE Power Advisor is located at:

<http://www.hpe.com/info/hppoweradvisor>.

NOTE: All power supplies in a server should match. Mixing Power Supplies is not supported.

NOTE: Option kits contain the specified power supply and a PDU IEC cable.

NOTE: 1600W power supplies only support high line voltage.

NOTE: HPE ProLiant servers ship with an IEC-IEC power cord used for rack mounting with Power Distribution Units (PDUs).

Visit [HPE power cords](#) for a full list of optional HPE power cords.

HPE PCIe Workload Accelerator Options

| | |
|-------------------------------------------------------------------------------------|------------|
| HPE 750GB PCIe x4 Lanes Write Intensive HHHH 3yr Wty Digitally Signed Firmware Card | 878038-B21 |
| HPE 1.6TB NVMe x8 Lanes Mixed Use HHHH 3yr Wty Digitally Signed Firmware Card | P10264-B21 |
| HPE 3.2TB NVMe x8 Lanes Mixed Use HHHH 3yr Wty Digitally Signed Firmware Card | P10266-B21 |
| HPE 6.4TB NVMe x8 Lanes Mixed Use HHHH 3yr Wty Digitally Signed Firmware Card | P10268-B21 |

HPE Computation and Graphics Accelerators

NOTE: Below GPU Options are only supported with AMD EPYC® 7xx1 Series Processor family at this point.

| | |
|------------------------------------------------|--------|
| HPE AMD Radeon Pro WX7100 Graphics Accelerator | Q1K37A |
|------------------------------------------------|--------|

NOTE:This option requires the High Performance Fan Kit (867810-B21) and High Performance Heat sink (882098-B21)

NOTE: System memory restriction < 1 TB

NOTE: This option requires Power Cable Kit (871828-B21)

| | |
|---------------------------------------------------|--------|
| HPE AMD Radeon Instinct MI25 Graphics Accelerator | Q1K38A |
|---------------------------------------------------|--------|

NOTE:This option requires High Performance Fan Kit (867810-B21) and High Performance Heat sink (882098-B21)

NOTE: This option IS NOT supported with 166W or higher Processors.

NOTE: System memory restriction < 16 TB

NOTE: This option requires Power Cable Kit (871830-B21)

NOTE: Not supported on 12 LFF chassis

NOTE: Max Qty=1 Doublewide GPU is allowed per riser

| | |
|----------------------------------------------|--------|
| HPE AMD Radeon Pro V340 Graphics Accelerator | QOY81A |
|----------------------------------------------|--------|

NOTE:This option requires High Performance Fan Kit (867810-B21) and High Performance Heat sink (882098-B21)

NOTE: This option IS NOT supported with 166W or higher Processors.

NOTE: System memory restriction < 128 TB

NOTE : This GPU requires Pwr Cable Kit (871828-B21) to be selected

NOTE: Max Qty=1 Doublewide GPU is allowed per riser

Core Options

| | |
|----------------------------------------------------------------------------------------------------------------------|--------|
| HPE NVIDIA Quadro RTX 6000 Graphics Accelerator | R0Z45A |
| NOTE: Max Qty=1 Doublewide GPU is allowed per riser | |
| NOTE: This option requires High Performance Fan Kit (867810-B21) and High Performance Heat sink (882098-B21) | |
| NOTE: This option IS NOT supported with 166W or higher Processors | |
| NOTE: System memory restriction < 128 TB | |
| NOTE: This GPU requires Pwr Cable Kit (871830-B21) to be selected | |
| NOTE: Not supported on 12 LFF chassis | |
| HPE NVIDIA Quadro RTX 8000 Graphics Accelerator | R1F97A |
| NOTE: Max Qty=1 Doublewide GPU is allowed per riser | |
| NOTE : This option requires High Performance Fan Kit (867810-B21) and High Performance Heat sink (882098-B21) | |
| NOTE: This option IS NOT supported with 166W or higher Processors | |
| NOTE: System memory restriction < 128 TB | |
| NOTE : This GPU requires Pwr Cable Kit (871830-B21) to be selected | |
| NOTE: Not supported on 12 LFF chassis | |
| HPE NVIDIA Tesla V100 FHHL 16GB Computational Accelerator | Q8Z50A |
| NOTE: This option requires High Performance Fan Kit (867810-B21) and High Performance Heat sink (882098-B21) | |
| NOTE: This option IS NOT supported with 166W or higher Processors | |
| NOTE: System memory restriction < 128 TB | |
| NOTE: Not supported on 12 LFF chassis | |
| NOTE : This GPU requires Pwr Cable Kit (P03849-B21) to be selected | |
| HPE NVIDIA Tesla V100 PCIe 32GB Computational Accelerator | Q9U36A |
| NOTE: Max Qty=1 Doublewide GPU is allowed per riser | |
| NOTE: This option requires High Performance Fan Kit (867810-B21) and High Performance Heat sink (882098-B21) | |
| NOTE: This option IS NOT supported with 166W or higher Processors | |
| NOTE: System memory restriction < 128 TB | |
| NOTE: This GPU requires Pwr Cable Kit (871829-B21) to be selected | |
| NOTE: Not supported on 12 LFF chassis | |
| HPE NVIDIA Tesla P40 24GB Computational Accelerator | Q0V80A |
| NOTE: Max Qty=1 Doublewide GPU is allowed per riser | |
| NOTE: This option requires High Performance Fan Kit (867810-B21) and High Performance Heat sink (882098-B21) | |
| NOTE: This option IS NOT supported with 166W or higher Processors | |
| NOTE: System memory restriction < 128 TB | |
| NOTE: This GPU requires Pwr Cable Kit (871829-B21) to be selected | |
| NOTE: Not supported on 12 LFF chassis | |

Core Options

NVIDIA Tesla M10 Quad GPU Module

QOJ62A

NOTE: This option requires the High Performance Fan Kit (867810-B21) and High Performance Heat sink (882098-B21)

NOTE: This option IS NOT supported with 166W or higher Processors

NOTE: System memory restriction < 1 TB

NOTE: Not supported on 12 LFF chassis

NOTE: This option requires Power Cable Kit (871828-B21)

NOTE: Max Qty=1 Doublewide GPU is allowed per riser

NOTE: Max Qty=2 of this GPU is allowed per server

HPE NVIDIA Tesla T4 16GB Computational Accelerator

ROW29A

NOTE: This option requires the High Performance Fan Kit (867810-B21) and High Performance Heat sink (882098-B21)

NOTE: System memory restriction < 128 TB

NOTE: This option IS NOT supported on the 8LFF or 12LFF Model-Xs

HPE Cooling Options

HPE DL38X Gen10 High Performance Temperature Fan Kit

867810-B21

NOTE: This kit is required for specific **Ambient temperature environments** coming in 2H2017.

NOTE: High Performance fan kit consists of 6 fans, these will need to replace all the standard fans in the unit, and fill all 6 fan cages.

NOTE: The 12 LFF and 24 SFF models (including field upgrades to 24 SFF) will already include 6 High Performance fan kits.

NOTE: The High Performance fan kit is needed to support certain Passive GPGPU (Graphics cards) configurations; or ASHRAE operating environments.

NOTE: For elevated ambient temperature support please see: <http://www.hpe.com/servers/ashrae>.

Additional Options

NOTE: Some options may not be integrated at the factory. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an HPE approved configurator. Contact your local sales representative for additional information.

Embedded Management HPE iLO Advanced

| | |
|--------------------------------------------------------------------------------------|------------|
| HPE iLO Advanced Electronic License with 1yr Support on iLO Licensed Features | E6U59ABE |
| HPE iLO Advanced 1-server License with 1yr Support on iLO Licensed Features | 512485-B21 |
| HPE iLO Advanced Flexible Quantity License with 1yr Support on iLO Licensed Features | 512486-B21 |
| HPE iLO Advanced AKA Tracking License with 1yr Support on iLO Licensed Features | 512487-B21 |
| HPE iLO Advanced Electronic License with 3yr Support on iLO Licensed Features | E6U64ABE |
| HPE iLO Advanced 1-server License with 3yr Support on iLO Licensed Features | BD505A |
| HPE iLO Advanced Flexible Quantity License with 3yr Support on iLO Licensed Features | BD506A |
| HPE iLO Advanced AKA Tracking License with 3yr Support on iLO Licensed Features | BD507A |

HPE Converged Infrastructure Management Software

| | |
|------------------------------------------------------------------------------------------------|----------|
| HPE OneView Physical Media Kit LTU | E5Y37A |
| HPE OneView Standard 1yr 9x5 Support Flexible Quantity E-RTU | K6F98AAE |
| HPE OneView including 3yr 24x7 Support Physical 1-server LTU | E5Y34A |
| HPE OneView including 3yr 24x7 Support Track 1-server LTU | E5Y36A |
| HPE OneView including 3yr 24x7 Support Flexible Quantity E-LTU | E5Y35AAE |
| HPE OneView Upgrade from Insight Management 3yr 24x7 Support 1-server LTU | F6Q91A |
| HPE OneView w/o iLO including 3yr 24x7 Support 1-server LTU | P8B24A |
| HPE OneView w/o iLO including 3yr 24x7 Support Track 1-server LTU | P8B25A |
| HPE OneView w/o iLO Advance including 3yr 24x7 Support Track 1-server LTU | E5Y40A |
| HPE OneView for ProLiant DL Server including 3yr 24x7 Support Bundle Track 1-server LTU | E5Y44A |
| HPE OneView Upgrade from Insight Management including 3yr 24x7 Support Flexible Quantity E-LTU | E5Y45AAE |
| HPE OneView w/o iLO including 3yr 24x7 Support Flexible Quantity E-LTU | P8B26AAE |

NOTE: Licenses ship without media. The HPE OneView Media Kit can be ordered separately, or can be **downloaded**.

HPE Security

| | |
|-------------------------------------------|------------|
| HPE Gen10 2U Bezel Kit | 867809-B21 |
| HPE Bezel Lock Kit | 875519-B21 |
| HPE Gen10 Chassis Intrusion Detection Kit | 867824-B21 |

NOTE: This provides a physical connection from the chassis board and hood and detects any physical intrusion into the chassis, providing security during the entire supply chain process of shipping, receiving, distribution, and operation.

| | |
|----------------------------------------------|------------|
| HPE Trusted Platform Module 2.0 Gen10 Option | 864279-B21 |
|----------------------------------------------|------------|

NOTE: HPE Trusted Platform Module 2.0 option works with Gen10 servers with UEFI Mode not Legacy Mode. It is not compatible with HPE ProLiant Gen8 servers or earlier generation variants.


NOTE: HPE server systems can have a TPM module (of any type) installed only once. It cannot be replaced with any other TPM module.

NOTE: There is a FIO setting to allow this TPM module to operate in a TPM 1.2 mode (872108-B21).

Additional Options

HPE Smart Array Controllers

The Gen10 controller naming framework has been updated to simplify identification as depicted below. For a more detailed breakout of the available Gen10 Smart Array controllers visit the [HPE Smart Array Gen10 Controllers Data Sheet](#)

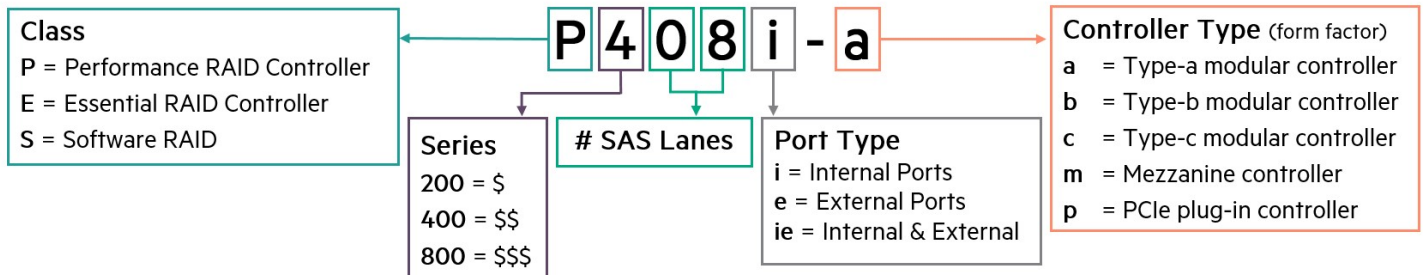

HPE 96W Smart Storage Battery (up to 20 Devices) with 145mm Cable Kit

NOTE: All performance RAID controllers are supported by the HPE Smart Storage Battery (P01366-B21), which supports multiple devices and is sold separately.

HPE Smart Array P824i-p MR Gen10 (24 Internal Lanes/4GB Cache/CacheCade) 12G SAS PCIe Controller 870658-B21

HPE Smart Array P816i-a SR Gen10 (16 Internal Lanes/4GB Cache/SmartCache) 12G SAS Modular Controller 804338-B21

NOTE: Does not occupy a PCIe expansion slot and includes SmartCache license.

NOTE: The P816i-a cable ships in the 12LFF chassis only.

HPE Smart Array P408i-a SR Gen10 (8 Internal Lanes/2GB Cache) 12G SAS Modular Controller 804331-B21

NOTE: Does not occupy a PCIe expansion slot.

HPE Smart Array P408i-p SR Gen10 (8 Internal Lanes/2GB Cache) 12G SAS PCIe Plug-in Controller 830824-B21

HPE Smart Array P408e-p SR Gen10 (8 External Lanes/4GB Cache) 12G SAS PCIe Plug-in Controller 804405-B21

Essential RAID Controllers

HPE Smart Array E208i-p SR Gen10 (8 Internal Lanes/No Cache) 12G SAS PCIe Plug-in Controller 804394-B21

HPE Smart Array E208e-p SR Gen10 (8 External Lanes/No Cache) 12G SAS PCIe Plug-in Controller 804398-B21

HPE Smart Array E208i-a SR Gen10 (8 Internal Lanes/No Cache) 12G SAS Modular Controller 804326-B21

NOTE: Does not occupy a PCIe expansion slot.

HPE Cable Options

HPE DL38X/560/580/ML350 Gen10 P824i-p Cable Kit P00614-B21

HPE DL385 Gen10 Mini SAS 3POS Cable Kit 882100-B21

HPE DL38x Gen10 8-pin Cable Kit 871828-B21

HPE DL38x Gen10 8-pin Keyed Cable Kit 871829-B21

HPE DL38x GPU 6px6p Y-Power Cable Kit 874212-B21

HPE GPU 2x 8-pin Cable Kit P03849-B21

HPE DL38x Gen10 8x 6-pin Cable Kit 871830-B21

HPE Disk-Based Backup

HPE RDX 1TB External Disk Backup System B7B69B

HPE RDX External Docking Station C8S07B

HPE RDX 2TB External Disk Backup System E7X53B

HPE Racks

Please see the [HPE Advanced Series Racks QuickSpecs](#) for information on additional racks options and rack specifications.

Please see the [HPE Enterprise Series Racks QuickSpecs](#) for information on additional racks options and rack specifications.

Please see the [HPE Standard Series Racks QuickSpecs](#) for information on additional racks options and rack specifications.

Additional Options

HPE Power Distribution Units (PDUs)

Please see the [HPE Basic Power Distribution Units \(PDU\) QuickSpecs](#) for information on these products and their specifications.
 Please see the [HPE Metered Power Distribution Units \(PDU\) QuickSpecs](#) for information on these products and their specifications.
 Please see the [HPE Intelligent Power Distribution Unit \(PDU\) QuickSpecs](#) for information on these products and their specifications.
 Please see the [HPE Metered and Switched Power Distribution Units \(PDU\) QuickSpecs](#) for information on these products and their specifications.

HPE Uninterruptible Power Systems (UPS)

To learn more, please visit the [HPE Uninterruptible Power Systems \(UPS\) web page](#).
 Please see the [HPE DirectFlow Three Phase Uninterruptible Power System QuickSpecs](#) for information on these products and their specifications.
 Please see the [HPE Line Interactive Single Phase UPS QuickSpecs](#) for information on these products and their specifications.

HPE Rack Options

Please see the [HPE KVM Switches web page](#) for information on these products and their specifications.

Rail Kits

Ball bearing and Easy Install rail kits contain telescoping rails which allow for in-rack serviceability.
 To assist in the installation of the server into the rack an optional installation tool is available by contacting your local services representative (695539-001).

NOTE: Hewlett Packard Enterprise recommends that a minimum of two people are required for all Rack Server installations. Please refer to your installation instructions for proper tools and number of people to use for any installation.

| | |
|-------------------------------------------------------|------------|
| HPE 2U Small Form Factor Easy Install Rail Kit | 733660-B21 |
| NOTE: Does not include CMA (733664-B21). | |
| HPE 2U Large Form Factor Easy Install Rail Kit | 733662-B21 |
| NOTE: Does not include CMA (733664-B21). | |
| HPE 2U Cable Management Arm for Easy Install Rail Kit | 733664-B21 |
| HPE 2U Small Form Factor Ball Bearing Rail Kit | 720863-B21 |
| NOTE: Does not include CMA (720865-B21). | |
| HPE 2U Large Form Factor Ball Bearing Rail Kit | 720864-B21 |
| NOTE: Does not include CMA (720865-B21). | |
| HPE 2U Cable Management Arm for Ball Bearing Rail Kit | 720865-B21 |

HPE Other Options

| | |
|--------------------------------------------|--------|
| HPE Rack LED Light Kit | BW939A |
| HPE Kit LCD 1.83m Latch Display Port Cable | G7T29A |

HPE USB and SD Options

HPE Enterprise Mainstream Flash Media Kits for Memory Cards

| | |
|--------------------------------------|------------|
| HPE 8GB Dual microSD Flash USB Drive | 741279-B21 |
| HPE 32GB microSD Flash Memory Card | 700139-B21 |
| HPE 8GB microSD Flash Memory Card | 726116-B21 |
| HPE 8GB microSD Flash USB Drive | 737953-B21 |

Additional Options

HPE Support Services

Installation & Startup Services

| | |
|-----------------------------------------------|--------|
| HPE Install ProLiant DL38x(p) Service | U4554E |
| HPE Installation and Startup DL38x(p) Service | U4555E |

Proactive Care

| | |
|-------------------------------------------------------------------------------------|--------|
| HPE 3 Year Proactive Care 24x7 ProLiant DL385 Gen10 Service | HC2M2E |
| HPE 3 Year Proactive Care 24x7 with DMR ProLiant DL385 Gen10 Service | HC2M3E |
| HPE 3 Year Proactive Care 24x7 with CDMR ProLiant DL385 Gen10 Service | HC2M4E |
| HPE 3 Year Proactive Care Call-To-Repair ProLiant DL385 Gen10 Service | HC2N1E |
| HPE 3 Year Proactive Care Call-To-Repair 24x7 with DMR ProLiant DL385 Gen10 Service | HC2N2E |
| HPE 3 Year Proactive Care Call-To-Repair with CDMR ProLiant DL385 Gen10 Service | HC2N3E |

NOTE: For a full listing of Support Services available for this server, please visit <https://ssc.hpe.com/>


Memory





General Memory Population Rules and Guidelines:

- Install DIMMs only if the corresponding processor is installed.
- If only one processor is installed in a two-processor system, only half of the DIMM slots are available.
- To maximize performance, it is recommended to balance the total memory capacity between all installed processors.
- When two processors are installed, balance the DIMMs across the two processors.
- White DIMM slots denote the first slot to be populated in a channel.
- Mixing of DIMM types (UDIMM, RDIMM, and LRDIMM) is not supported.
- The maximum memory speed is a function of the memory type, memory configuration, and processor model.
- The maximum memory capacity is a function of the number of DIMM slots on the platform, the largest DIMM capacity qualified on the platform, the number and model of installed processors qualified on the platform.
- For details on the HPE Server Memory Options Population Rules, visit: <http://www.hpe.com/docs/amd-population-rules>
- To realize the performance memory capabilities listed in this document, HPE DDR4 SmartMemory is required. For additional information, please see the: [HPE DDR4 Smart Memory QuickSpecs](#)
- For details on the HPE Server Memory speed, visit: <http://www.hpe.com/docs/amd-speed-tables>

Storage

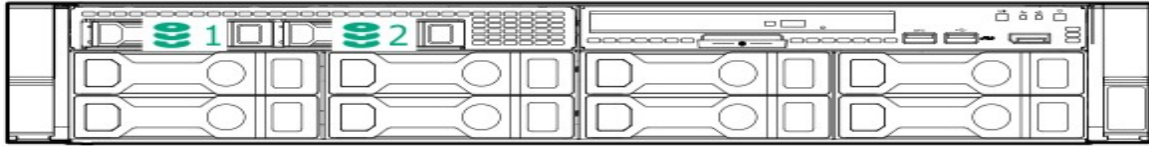


8LFF chassis with Universal media bay and optional 2SFF and optical drive shown

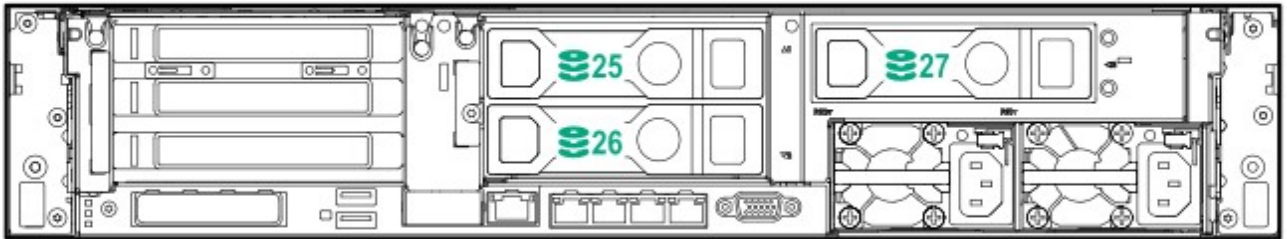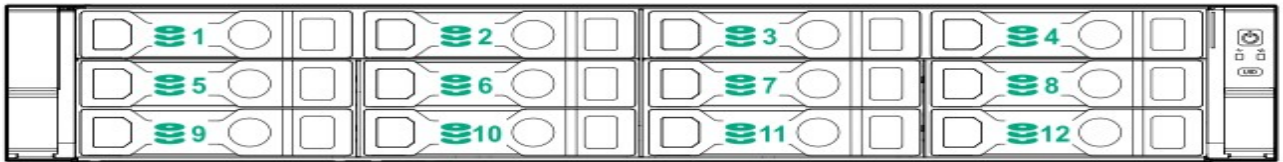


12 LFF + 3 rear LFF drives

Storage

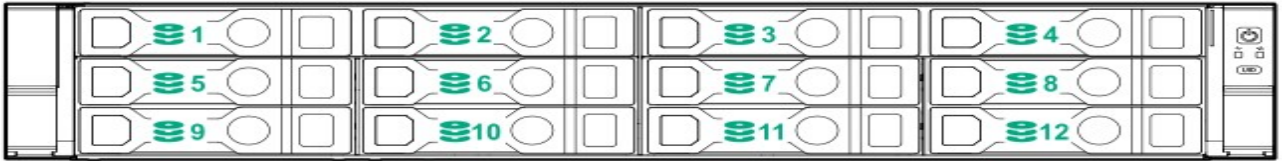

12 LFF + 2 rear SFF drives

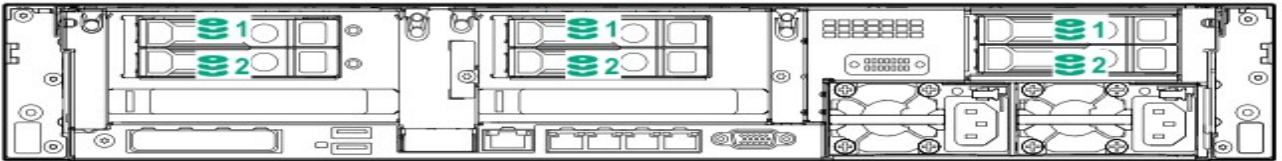

6 rear SFF drives

Storage



24 SFF + rear 2 SFF drives

Technical Specifications

System Unit

Dimensions

8.73 x 44.55 x 67.94 cm SFF Drives:
3.44 x 17.54 x 26.75 in

8.73 x 44.55 x 73.02 cm LFF Drives:
3.44 x 17.54 x 28.75 in

Weight (approximate)

14.9 kg Minimum: 8 SFF chassis with 1x SFF HDD and 7 HDD blanks, 2x Drive Bay blanks, 1x processor including standard heatsink, 1x power supply (plus blank), 1x Smart Array, 1x Riser installed, cables for the above)
32.75 lb

23.6 kg Maximum: 12 LFF hard drives (no rear drives), 2x processors, 2x power supplies, 1x Smart Array, 2x Risers installed
51.5 lb

Input Requirements (per power supply)

Rated Line Voltage 100 to 120 VAC
200 to 240 VAC

BTU Rating

Maximum For 800W Power Supply: 3207 BTU/hr (at 100 VAC), 3071 BTU/hr (at 200 VAC), 3112 BTU/hr (at 240 VAC) for China Only
For 500W Power Supply: 1979 BTU/hr (at 100 VAC), 1911 BTU/hr (at 200 VAC), 1965 BTU/hr (at 240 VAC) for China Only

Power Supply Output (per power supply)

Rated Steady-State Power For 1400W Power Supply: 1400W (at 240 VAC), 1400W (at 240 VAC)
For 800W Power Supply: 800W (at 100 VAC), 800W (at 240 VAC), 800W (at 240 VAC) input for China only
For 500W Power Supply: 500W (at 100 VAC), 500W (at 240 VAC), 500W (at 240 VAC) input for China only

Maximum Peak Power For 1400W Power Supply: 1400W (at 200 to 240 1VAC), 1400W (at 240 VAC) input for China only
For 800W Power Supply: 800W (at 100 to 127 VAC), 800W (at 200 to 240 1VAC), 800W (at 240 VAC) input for China only
For 500W Power Supply: 500W (at 100 to 127 VAC), 500W (at 200 to 240 VAC), 500W (at 240 VAC) input for China only

System Inlet Temperature

Standard Operating Temperature 10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 305 m (1.8°F per every 1000 ft) above sea level to a maximum of 3050 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 20°C/hr (36°F/hr). The upper limit and rate of change may be limited by the type and number of options installed.
System performance during standard operating support may be reduced if operating with a fan fault or above 30°C (86°F).

Technical Specifications

System Inlet Temperature

Extended Ambient Operating Temperature For approved hardware configurations, the supported system inlet range is extended to be: 5° to 10°C (41° to 50°F) and 35° to 40°C (95° to 104°F) at sea level with an altitude derating of 1.0°C per every 175 m (1.8°F per every 574 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system are listed at the URL:

<http://www.hpe.com/servers/ashrae>

For approved hardware configurations, the supported system inlet range is extended to be: 40° to 45°C (104° to 113°F) at sea level with an altitude derating of 1.0°C per every 125 m (1.8°F per every 410 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system are listed at the URL: <http://www.hpe.com/servers/ashrae>

System performance may be reduced if operating in the extended ambient operating range or with a fan fault.

Non-operating -30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr (36°F/hr).

Relative Humidity

Operating 8% to 90% - Relative humidity (Rh), 28°C maximum wet bulb temperature, non-condensing.

(non-condensing) Non-operating 5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non-condensing.

Altitude

Operating 3050 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min).

Non-operating 9144 m (30,000 ft). Maximum allowable altitude change rate is 457 m/min (1500 ft/min).

RTC Accuracy

50 ppm

Acoustic Noise

Listed are the declared A-Weighted sound power levels (LWAd) and declared average bystander position A-Weighted sound pressure levels (LpAm) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109). The listed sound levels apply to standard shipping configurations. Additional options may result in increased sound levels. Please have your HPE representative provide information from the HPE EMESC website for further technical details regarding the configurations listed below.

Idle

| | |
|------|----------------------------------------------------------------------------------------------------------------|
| LWAd | <ul style="list-style-type: none"> • 4.8 B Entry • 4.4 B Base • 4.6 B Perf |
| LpAm | <ul style="list-style-type: none"> • 37 dBA Entry • 31 dBA Base • 31 dBA Perf |

Operating

| | |
|------|----------------------------------------------------------------------------------------------------------------|
| LWAd | <ul style="list-style-type: none"> • 4.8 B Entry • 4.4 B Base • 4.6 B Perf |
| LpAm | <ul style="list-style-type: none"> • 37 dBA Entry • 31 dBA Base • 31 dBA Perf |

NOTE: Acoustics levels presented here are generated by the test configuration only. Acoustics levels will vary depending on system configuration. Values are subject to change without notification and are for reference only.

NOTE: Product conformance to cited product specifications is based on sample (type) testing, evaluation, or assessment. This product or family of products is eligible to bear the appropriate compliance logos and statements.

NOTE: The Listed sound levels apply to standard shipping configurations. Additional options may result in increased sound levels.

Technical Specifications

Emissions Classification (EMC) – Regulatory Information

To view the regulatory information for your product, view the Safety and Compliance Information for Server, Storage, Power, Networking, and Rack Products, available at the Hewlett Packard Enterprise Support Center:

<http://www.hpe.com/support/Safety-Compliance-EnterpriseProducts>

HPE Smart Array

For latest information on **HPE Smart Array Gen10 Controllers for HPE ProLiant DL, ML and Apollo Servers** please refer to their QuickSpecs. (E208i-a,E208i-p,E208e-p,P408i-a,P408i-p,P408e-p,P816i-a)

Environment-friendly Products and Approach - End-of-life Management and Recycling

Hewlett Packard Enterprise offers **end-of-life product return, trade-in, and recycling programs**, in many geographic areas, for our products. Products returned to Hewlett Packard Enterprise will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard Enterprise web site. These instructions may be used by recyclers and other WEEE treatment facilities as well as Hewlett Packard Enterprise OEM customers who integrate and re-sell Hewlett Packard Enterprise equipment.

Summary of Changes

| Date | Version History | Action | Description of Change |
|-------------|-----------------|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 03-Sep-2019 | Version 18 | Changed | Overview ,Standard Features, Pre-configuredModels, Configuration Information, Core Options, and Additional Options,sections were updated. Obsolete SKU were removed. |
| 26-Aug-2019 | Version 17 | Changed | Overview,Standard Features, Optional Features,Pre-configured Models, Core Options, Additional Options and Memory sections were updated. Obsolete SKUs were removed from the QuickSpecs. |
| 05-Aug-2019 | Version 16 | Changed | Configuration Information - Factory Integrated Models and Core Options sections were updated. Obsolete SKU was removed. |
| 03-Jun-2019 | Version 15 | Changed | Overview, Core Options, Additional Options, Pre-configured Models and Memory sections were updated. The U.S. version of QuickSpecs is no longer being updated, please reference the Worldwide QuickSpecs for latest information. |
| 15-Apr-2019 | Version 14 | Changed | SKUs were updated. |
| 02-Apr-2019 | Version 13 | Changed | Overview, Core Options, Additional Options and Standard Features sections were updated |
| 04-Mar-2019 | Version 12 | Changed | Pre-configured Model and Additional Options sections were updated. |
| 04-Feb-2019 | Version 11 | Changed | Overview, Standard Features, Pre-configured Models, Configuration Information, Core Options , Additional Options and Optional Features were updated |
| 10-Dec-2018 | Version 10 | Changed | SKU 829335-B21 was deleted from Core Options Sectio |
| 15-Oct-2018 | Version 9 | Changed | Overview, Standard Features, Pre-Configured models, Configuration Information – Factory Integrated Models, Core Options, Additional Options, Memory were revised. |
| 01-Oct-2018 | Version 8 | Changed | Overview, Standard Features, Pre-Configured models, Configuration Information – Factory Integrated Models, Core Options, Additional Options, Memory were revised. |
| 06-Aug-2018 | Version 7 | Changed | New Memory option and new GPU option were added. Added new Solid State Drives offering. Configuration Information – Factory Integrated Models, Core Options, and Additional Options were revised. |
| 02-Jul-2018 | Version 6 | Changed | Core Options and Additional Options were revised. |
| 04-Jun-2018 | Version 5 | Changed | Added new SSD offering. New GPU options and Riser information table were added. Core Options, Additional Options, and Memory were revised. Obsolete SKUs were removed from the QuickSpecs. |
| 07-May-2018 | Version 4 | Changed | Added new Entry model to the Pre-Configured models section. Pre-Configured models, Configuration Information – Factory Integrated Models, Core Options, and Additional Options were revised. |
| 02-Apr-2018 | Version 3 | Changed | SKU descripton were updated. |
| 12-Feb-2018 | Version 2 | Changed | New model was added to the Pre-configured Models section. Overview, Expansion Slots, Maximum Internal Storage, Pre-configured Models, Configuration Information - Factory Integrated Models, Core Options, Additional Options, and Memory were revised. Obsolete SKUs were removed from the QuickSpecs. |
| 04-Dec-2017 | Version 1 | New | New QuickSpecs. |

Summary of Changes



[Sign up for updates](#)

© Copyright 2019 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

AMD® and EPYC® are registered trademarks of Advanced Micro Devices Corporation in the U.S. and other countries.

Microsoft®, Windows®, and Windows Server® are U.S. registered trademarks of the Microsoft group of companies.

For hard drives, 1GB = 1 billion bytes. Actual formatted capacity is less

a00026913enw - 16108 - Worldwide - V18 - 03-September-2019

