

EX-SFP-10GE-ER-1310-AO

Juniper Networks® EX-SFP-10GE-ER-1310 Compatible TAA 10GBase-ER SFP+ Transceiver (SMF, 1310nm, 40km, LC, DOM)

Features

- SFF-8432 and SFF-8472 Compliance
- Duplex LC Connector
- Commercial Temperature 0 to 70 Celsius
- Single-mode Fiber
- Hot Pluggable
- Excellent ESD Protection
- Metal with Lower EMI
- RoHS Compliant and Lead Free



Applications

- 8x/10x Fibre Channel
- 10GBase-ER Ethernet
- Access, Metro and Enterprise

Product Description

This Juniper Networks® EX-SFP-10GE-ER-1310 compatible SFP+ transceiver provides 10GBase-ER throughput up to 40km over single-mode fiber (SMF) using a wavelength of 1310nm via an LC connector. It is guaranteed to be 100% compatible with the equivalent Juniper Networks® transceiver. This easy to install, hot swappable transceiver has been programmed, uniquely serialized and data-traffic and application tested to ensure that it will initialize and perform identically. Digital optical monitoring (DOM) support is also present to allow access to real-time operating parameters. This transceiver is Trade Agreements Act (TAA) compliant. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

AddOn's transceivers are RoHS compliant and lead-free.

TAA refers to the Trade Agreements Act (19 U.S.C. & 2501-2581), which is intended to foster fair and open international trade. TAA requires that the U.S. Government may acquire only "U.S. – made or designated country end products."



Regulatory Compliance

- ESD to the Electrical PINs: compatible with MIL-STD-883E Method 3015.4
- ESD to the LC Receptacle: compatible with IEC 61000-4-3
- EMI/EMC compatible with FCC Part 15 Subpart B Rules, EN55022:2010
- Laser Eye Safety compatible with FDA 21CFR, EN60950-1& EN (IEC) 60825-1,2
- RoHS compliant with EU RoHS 2.0 directive 2015/863/EU

Absolute Maximum Ratings

Parameter	Symbol	Min.	Тур.	Max.	Unit
Maximum Supply Voltage	Vcc	-0.5		4.0	V
Storage Temperature	TS	-40		85	°C
Operating Case Temperature	Ti	0	25	70	°C
Data Rate			10.3125		Gbps

Electrical Characteristics (TOP=25°C, Vcc=3.3Volts)

Parameter		Symbol	Min.	Тур.	Max.	Unit	Notes	
Power Supply Voltage		Vcc	3.135	3.3	3.465	V		
Power Supply Current		Icc			300	mA		
Power Dissipation		PD			1000	mW		
Transmitter								
Input Differe	ntial Impedance	Zin		100		Ω		
Differential Data Input Swing		Vin,p-p	180		700	mVp-p		
TX_FAULT	Transmitter Fault	Vон	2.0		VccHOST	V		
	Normal Operation	VOL	0		0.8	V		
TX_DISABLE	Transmitter Disable	VIH	2.0		VCCHOST	V		
	Transmitter Enable	VIL	0		0.8	V		
Receiver								
Output Differential Impedance		Zo		100		Ω		
Differential Data Output Swing		VOUT, P-P	300		850	mVp-p	1	
Data Output Rise Time, Fall Time		t _r , t _f	28			ps	2	
RX_LOS	Loss of signal (LOS)	Vон	2.0		VCCHOST	V	3	
	Normal Operation	VOL	0		0.8	V	3	

Notes:

- 1. Internally AC coupled, but requires an external 100Ω differential load termination.
- 2. 20-80%.
- 3. LOS is an open collector output. Should be pulled up with $4.7k\Omega$ on the host board.

Optical Characteristics

Parameter	Symbol	Min.	Тур.	Max.	Unit	Notes	
Transmitter							
Launch Optical Power	Ро	0		+5	dBm	1	
Center Wavelength Range	λς	1260	1310	1355	nm		
Extinction Ratio	ER	3.5			dB	2	
Optical Modulation Amplitude	OMA	-5.2			dBm		
Spectral Width (-20dB)	Δλ			1	nm		
Side Mode Suppression Ratio	SMSR	30			dB		
Transmitter and Dispersion Penalty	TDP			3.2	dB		
Optical Return Loss Tolerance	ORLT			12	dB		
Pout @TX_Disable Asserted	Poff			-30	dBm	1	
Eye Diagram	IEEE Std 802.	IEEE Std 802.3-2005 10Gb Ethernet 10GBASE-ER compatible					
Receiver							
Center Wavelength	λς	1260	1310	1355	nm		
Receiver Sensitivity (Pavg)	S			-15	dBm	3	
Receiver Overload (Pavg)	POL	0.5			dBm	3	
Stressed Sensitivity (OMA)				-10.3	dBm	4	
Optical Return Loss	ORL	12			dB		
LOS De-Assert	LOS _D			-16	dBm		
LOS Assert	LOS _A	-30			dBm		
LOS Hysteresis		0.5		4.5	dB		

Notes:


- 1. The optical power is launched into $9/125\mu m$ SMF.
- 2. Measured with a PRBS 2³¹-1 test pattern @10.3125Gbps
- 3. Measured with PRBS 2^{31} -1 test pattern, 10.3125 Gb/s, BER<10⁻¹².
- 4. Comply with IEEE 802.3-2005.

Pin Descriptions

Pin	Symbol	Name/Descriptions	Ref.
1	VeeT	Transmitter Ground	1
2	TX_Fault	Transmitter Fault (LVTTL-O) - High indicates a fault condition	2
3	TX_Disable	Transmitter Disable (LVTTL-I) – High or open disables the transmitter	3
4	SDA	Two wire serial interface Data Line (LVCMOS-I/O) (MOD-DEF2)	4
5	SCL	Two wire serial interface Clock Line (LVCMOS-I/O) (MOD-DEF1)	4
6	MOD_ABS	Module Absent (Output), connected to VeeT or VeeR in the module	5
7	RS0	Rate Select 0 – Not used, Presents high input impedance	
8	RX_LOS	Receiver Loss of Signal (LVTTL-O)	2
9	RS1	Rate Select 1 – Not used, Presents high input impedance	
10	VeeR	Receiver Ground	1
11	VeeR	Receiver Ground	1
12	RD-	Inverse Received Data out (CML-O)	
13	RD+	Received Data out (CML-O)	
14	VeeR	Receiver Ground	
15	VccR	Receiver Power - +3.3V	
16	VccT	Transmitter Power - +3.3 V	
17	VeeT	Transmitter Ground	1
18	TD+	Transmitter Data In (CML-I)	
19	TD-	Inverse Transmitter Data In (CML-I)	
20	VeeT	Transmitter Ground	1

Notes:

- 1. The module signal grounds are isolated from the module case.
- 2. This is an open collector/drain output that on the host board requires a 4.7K Ω to 10K Ω pull-up resistor to VccHost.
- 3. This input is internally biased high with a 4.7K Ω to 10K Ω pull-up resistor to VccT.
- 4. Two-Wire Serial interface clock and data lines require an external pull-up resistor dependent on the capacitance load.
- 5. This is a ground return that on the host board requires a 4.7K Ω to 10K Ω pull-up resistor to VccHost.

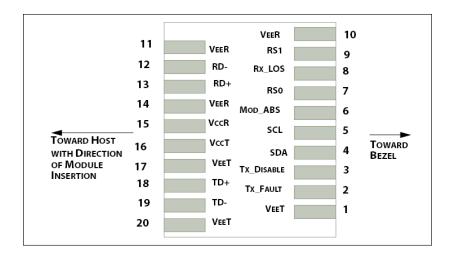

Recommended Host Board Power Supply Filter Network


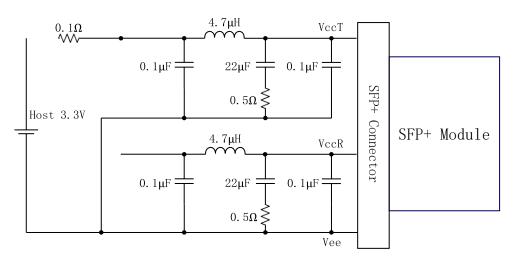



Figure 2. Recommended Host Board Power Supply Filter Network

Recommended Application Interface Block Diagram

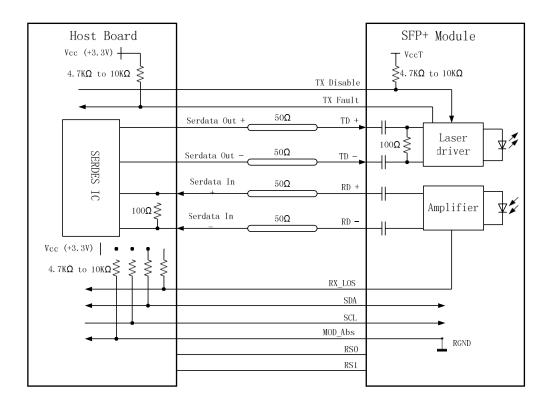

Mechanical Specifications

Small Form Factor Pluggable (SFP) transceivers are compatible with the dimensions defined by the SFP Multi-

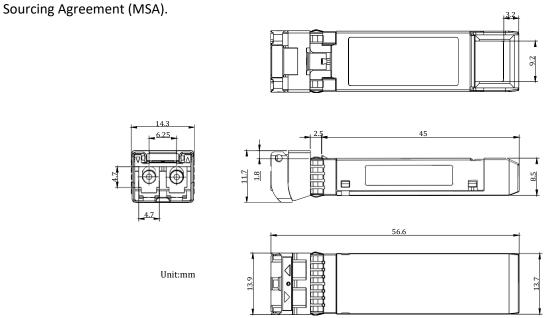

About AddOn Networks

In 1999, AddOn Networks entered the market with a single product. Our founders fulfilled a severe shortage for compatible, cost-effective optical transceivers that compete at the same performance levels as leading OEM manufacturers. Adhering to the idea of redefining service and product quality not previously had in the fiber optic networking industry, AddOn invested resources in solution design, production, fulfillment, and global support.

Combining one of the most extensive and stringent testing processes in the industry, an exceptional free tech support center, and a consistent roll-out of innovative technologies, AddOn has continually set industry standards of quality and reliability throughout its history.

Reliability is the cornerstone of any optical fiber network and is in engrained in AddOn's DNA. It has played a key role in nurturing the long-term relationships developed over the years with customers. AddOn remains committed to exceeding industry standards with certifications from ranging from NEBS Level 3 to ISO 9001:2005 with every new development while maintaining the signature reliability of its products.

U.S. Headquarters

Email: sales@addonnetworks.com

Telephone: +1 877.292.1701

Fax: 949.266.9273

Europe Headquarters

Email: salessupportemea@addonnetworks.com

Telephone: +44 1285 842070