



CPW65 Quick Start

Package Contents


The following items are included in your package. If you find anything missing, contact your system administrator.




DECT Microphonex2



Charger Cradle





Micro USB Cable



Quick Start Guide

Hardware Overview

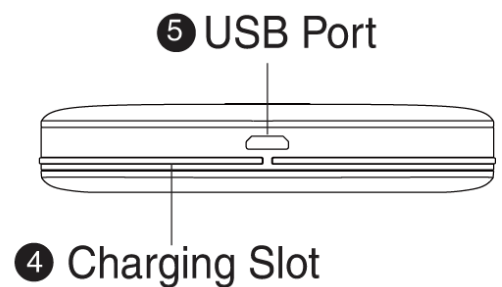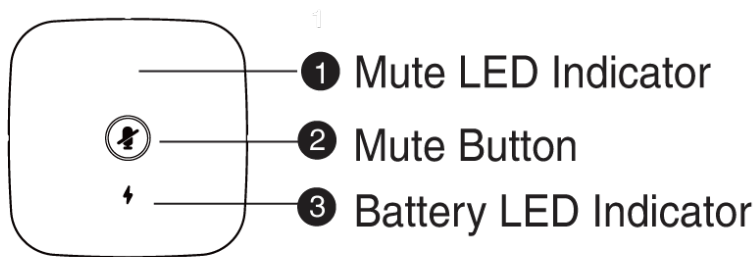

LED Instruction

LED indicator on the Charger Cradle:

LED Status	Description
Solid white	The CPW65 is being charged.
Off	The CPW65 is not being charged.

Mute LED indicator on the CPW65:



LED Status	Description
Solid green	The phone enters the pre-dialing screen. The phone is in a call and unmuted.
Fast flashing red	The phone is receiving an incoming call.
Solid red	The phone is muted.
Fast flashing yellow	The CPW65 is in the registration mode.

Slowly flashing yellow	The CPW65 has registered with the phone, but the CPW65 is out of range. The CPW65 has registered with the phone, but the CP965 is turned off.
Flashing red and green alternately	The phone is searching for the CPW65 which has registered with it.
Off	The CPW65 is idle.

Battery LED indicator on the CPW65:

LED Status	Description
Solid green for one second and then off	The CPW65 is turned on.
Solid green for 3 seconds and then off	The CPW65 is idle.
Solid green	The CPW65 is fully charged.
Solid red	The CPW65 is being charged.
Fast flashing red 3 times and then off	The battery capacity is too low to turn on the CPW65.
Slowly flashing red	The battery capacity is less than 10%.
Off	If you tap the mute button and the battery LED indicator on the CPW65 is still off, it means the CPW65 is turned off.

Charge CPW65

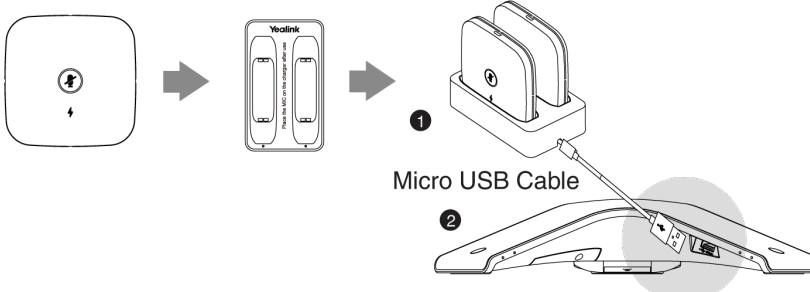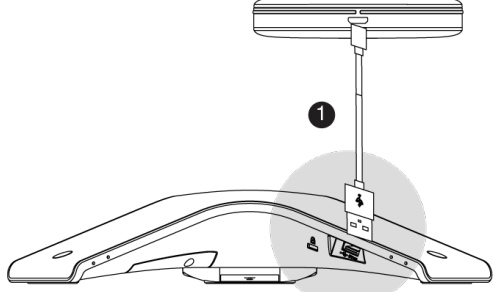Method 1	Method 2
 <p>1. Put the CPW65 on the charger cradle.</p> <p>2. Plug the provided micro USB cable into the micro USB port on the charger cradle, and into the USB port on the CP965.</p>	 <p>Plug the provided micro USB cable into the micro USB port on the CPW65, and into the USB port on the CP965.</p>

When charging, the battery LED indicator on the CPW65 glows red. When it is fully charged, the battery LED indicator on the CPW65 will glow green.

The CPW65 starts up automatically when charging. Or you can long tap the Mute button on the CPW65 for 3 seconds to turn it on.

TIP

- If it is the first time you use the CPW65, you need to fully charge it for normal use.
- If the CPW65 is not in use, we still recommend charging it even when the battery is full.

Register CPW65 to CP965 Conference Phone

You can skip this chapter if the CPW65 has registered with the CP965 conference phone.

Otherwise, follow the steps below to register the CPW65 to the CP965 conference phone. The CPW65 works as the audio input device of the CP965 conference phone.

To register the CPW65 to the CP965 conference phone:

1. On the CP965, tap **More->Mic->+**.
2. Turn on the CPW65.

The CPW65 enters the registration mode automatically. And the mute LED indicator on the CPW65 fast flashes yellow.

The CPW65 registers with the CP965 conference phone automatically. If the registration is successful, the mute LED indicator on the CPW65 goes out and the touch screen of CP965 conference phone prompts the CPW65 information: battery, work time and standby time.

TIP

You can connect up to two CPW65 to a CP965 conference phone.

Mute & Unmute CPW65


When the CPW65 works as an audio input device for the CP965 conference phone and the CP965 conference phone is in a call, you can tap the Mute button on the CPW65 to mute or unmute the CPW65.

Place CPW65 in a Conference Room

The CPW65 is a wireless expansion mic that can work as the audio input device of the CP965 conference phone. It supports 360-degree audio pickup at a radius of up to 3 meters. You can place the CPW65 on a conference table.

Do the following to ensure optimal voice quality:

- The CPW65 should be less than 20 meters from the CP965 conference phone, and there are no obstacles between them.
- Place the CPW65 on a stable surface and keep it away from obstacles, so that they can achieve the best performance.

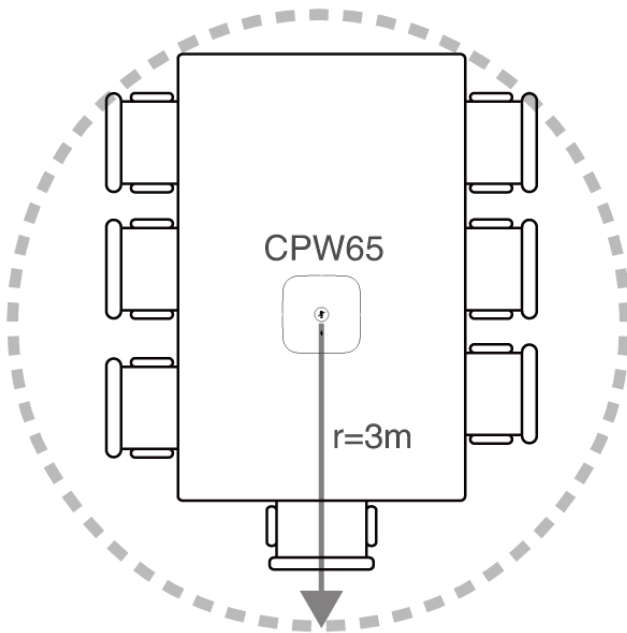

FAQ

1. How to turn off the CPW65?

Long tap the Mute button on the CPW65 until the battery LED indicator the CPW65 glows red for 3 seconds and then goes out.

2. How to find the CPW65 which has registered with the CP965 conference phone?

1. On the CP965, tap **More > Mic**.
2. Select the desired microphone, and then tap **Find**.

The mute LED indicator on the CPW65 flashes red and green alternately.

3. How to register the CPW65 to another CP965 conference phone?

The CPW65 can only be registered to one CP965 conference phone. If you register the CPW65 to another CP965 conference phone, the CPW65 will deregister from the previous CP965 conference phone automatically. To register the CPW65 to another CP965 conference phone:

1. On the CP965, tap **More > Mic > +**.
2. Charge the CPW65.
3. Long tap the Mute button on the CPW65 for 5 seconds.

The CPW65 enters the registration mode. And the mute LED indicator on the CPW65 fast flashes yellow.

The CPW65 registers with the new CP965 conference phone automatically.

4. How to deregister the CPW65?
 1. On the CP965, tap **More > Mic**.
 2. Select the desired mic, and then tap **Detail**.
 3. Tap **Unbind** to deregister the CPW65.