

Fairlight Live Audio Panel 20



Fairlight Live Audio Panel 20 is a desktop control surface with 20 motorized faders and two large touchscreen displays, designed for professional live audio mixing with Fairlight Live. Controls include layers, bus, matrix, aux, VCA, sub-masters and talkback for fast hands-on access to your mix. The touchscreens display channel strip information, levels, EQ, dynamics processing and plug-in interfaces. Ideal for home studios and mid-sized productions. Fully integrated with Fairlight Live.

£2,679

Connections

2110 IP Video and Audio Networks

2 x 10G RJ45 Ethernet connections.

Senders and Receivers per 10G Pair

Supports 2110 IP video and audio plus analog audio in and out of panel.

1G Control Network

1 x 1G RJ45 for computer connection, configuration and software updates.

HDMI Monitor Outputs

1

Analog Audio Inputs

1 x 3-pin XLR for mic level analog audio.

1 x 5-pin XLR for talkback headset.

Analog Audio Outputs

2 x 3-pin XLR for line level analog audio.

1 x 5-pin XLR for talkback headset.

2 x 6.35mm headphone jack.

Computer Interface


1 x USB Type-C for computer connection, software configuration and software updates.

HDMI Video Output

1 x HDMI Type A.

Power

2 x IEC C14 power inputs.

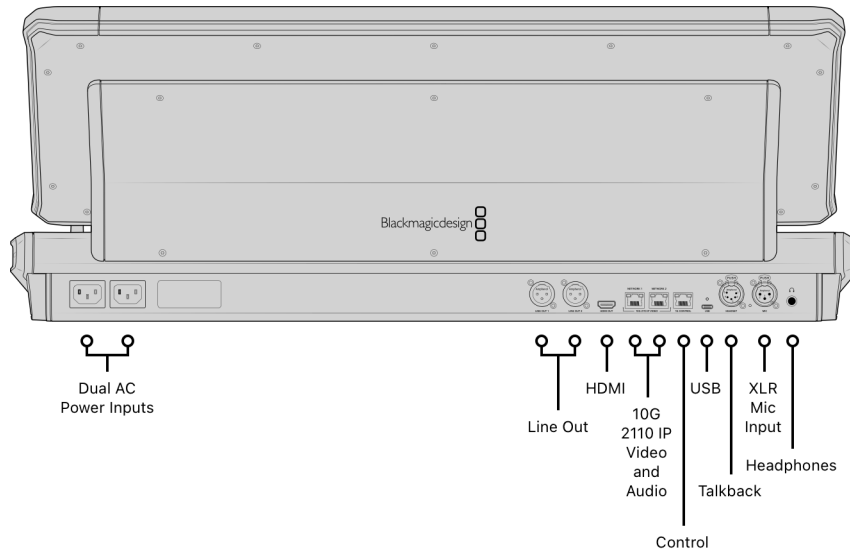

Display

Built in Display

2 x 11.6 inch 1920 x 1080 LCD touch screens.

HDMI Out

HD or Ultra HD

Video Standards

720p50, 720p59.94, 720p60
1080i50, 1080i59.94, 1080i60
1080p23.98, 1080p24, 1080p25,
1080p29.97, 1080p30, 1080p50,
1080p59.94, 1080p60
2160p23.98, 2160p24, 2160p25,
2160p29.97, 2160p30, 2160p50,
2160p59.94, 2160p60

Controls

Channel Faders

20 flying faders.

Channel Rotary Knobs

20 multi function rotary knobs with ring LED indicators.

Channel Control Buttons

Select, Solo and Mute for each channel.

Channel Focus

Processing and input controls for selected channel.

Contextual Rotary Knobs

20 rotary knobs to adjust associated parameters appearing on lower row of focus and view screens.

Contextual Buttons

20 buttons to activate functions or adjust parameters appearing on upper row of focus and view screens.

On Line Button

Online mode follows timecode from external source.

On Air Button

On Air mode locks panel.

Player/Recorder Keypad

Controls for the Player/Recorder support recording performances/ rehearsals, playback for Virtual Sound Checks

Cue Player Keypad

Cue Player controls - Jingle/Cart player for SFX stingers plus supports MIDI cues for triggering external devices.

Snapshots Keypad

Store and recall mixer settings and configurations.

Control Room and Monitoring Keypad

Controls for source selection and monitor circuit selection.

Masters Keypad Controls for master views and enabling masters on faders. View Only selection sends metering views to screen, when off selection targets faders.	Globals Keypad Global controls include forward, back, undo and escape plus access the setup screen and 3 x USER defined buttons.	Talkback Keypad Controls for talkback to 4 groups, direct to channel and ALL. Dedicated cue mode button plus access the talkback setup screen.
---	--	--

Talkback

Microphone 1 x built in talkback microphone.	Talkback Connections 1 x 5-pin XLR headset 1 x 3-pin XLR Mic input 2 x 6.35mm headphone sockets 2 x 3-pin XLR audio monitor outputs.	Talkback Selection Talkback groups, direct to channel, or all. Talkback Groups 4
--	---	---

Software

Software Included
Fairlight Live
Blackmagic OS
Internal software upgrade via updater application.

Operating Systems



Mac 15.0 Sequoia,
Mac 26.0 Tahoe or later.



Windows 11


Settings Control

Fairlight Live software when connected by Ethernet or USB.

Power Requirements

Power Supply 2 x 100 - 240V AC 50/60Hz internal power supplies.	Power Inputs 2 x IEC C14 sockets.	Power Usage TBC
---	---	---------------------------

Physical Specifications

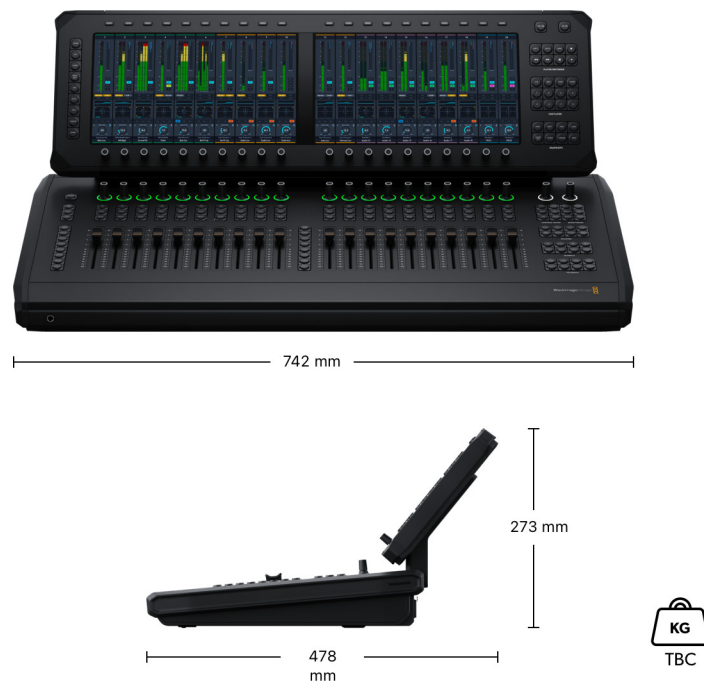

Environmental Specifications

Operating Temperature

0° to 40°C (32° to 104°F)

Storage Temperature

-20° to 60°C (-4° to 140°F)

Relative Humidity

0% to 90% non-condensing

What's Included

Fairlight Live Audio Panel 20

Welcome wallet with QR code for software download

Warranty

1 Year Limited Manufacturer's
Warranty.

All items on this website are copyright Blackmagic Design Pty. Ltd. 2026, all rights reserved.
All trademarks are property of their respective owners. MSRP excludes VAT and local shipping costs.
This website uses remarketing services to advertise on third party websites to previous visitors to our site.
You can opt out at any time by changing cookie settings. [Privacy Policy](#)

Blackmagic Design Authorized Reseller