



# SL300C ROG CHARIOT INSTALLATION GUIDE




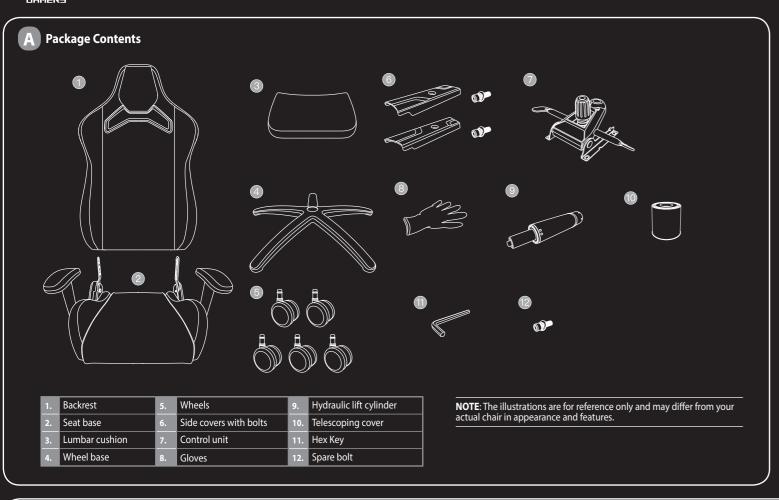

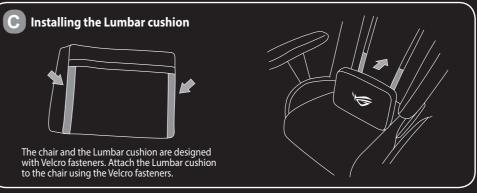


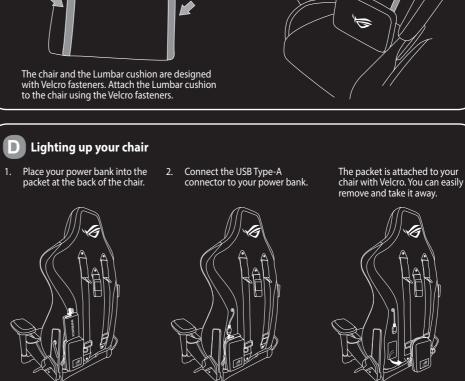






One by one, insert and push the wheels into the base.



2 Insert the hydraulic lift cylinder into the center hole of the base. Remove the red protective cap on top if there was any.



hydraulic lift cylinder.




For models with armrest preassembled, please skip this step.


Remove the pre-assembled bolts and washers (1) & 3). Place the 4 large washers (1) between the armrest mounting bar (2) and the seat base. Hold the armrest in place, then insert and tighten all 4 bolts (3). Use the hex key to tighten them all, and repeat on the other side.




5 Use the hex key to remove the pre-assembled bolts and washers from the backrest.




6 Remove the protective foam covers from the brackets of the seat base. Then position the backrest carefully between the brackets. Insert and attach the 4 bolts (2 on each side) you removed in step 5 by hand first. Then use the hex key to tighten them. Start with the two bolts on the top of each side, then the bottom two.



Install the side covers and tighten the bolts. (The covers are marked "L" for the left side and "R" for the right on the inside.)




Now flip the chair over, facing down. Then remove the 4 pre-mounted bolts from the underside with



 Repeat the step above to install the control unit, and then place the nut to mount the hydraulic lift cylinder facing the back of the seat (where the backrest is installed



10 Insert top of the hydraulic lift cylinder into the mounting hole on the control unit, and then turn the chair over in upright position. (Two-person handling required for your safety)



Aura RGB Lighting: On / Effect / Off

Press repeatedly to power the Aura RGB LEDs on or off, or cycle through the current 7 effects: (1) rainbow (2) breathing (3) color cycle (4) wave (5) glowing Yo-Yo (6) strobing (7) static

Press the Aura RGB Lighting button for 3 seconds to terminate the lighting.

Press it to wake up again or reconnect your powerbank will keep its previous setting.

NOTE: Your powerbank may automatically adjust its output when the lighting is terminated. Disconnect and reconnect it if the Aura RGB Lighting cannot wake up after toggling it back on.

Aura RGB color

Press repeatedly to cycle through the following 8 striking colors: (1) red (2) orange (3) yellow (4) green (5) blue (6) indigo (7) purple (8) pink

**NOTE**: This feature is only available on the following Aura RGB effects: (2) breathing (6) strobing (7) static

Aura RGB speed: Slow / Medium / Fast Press repeatedly to cycle through the following 3 color effect speeds: (1) Slow (2) Medium (3) Fast

**NOTE**: This feature is only available on the following Aura RGB effects: (1) rainbow (2) breathing (3) color cycle (4) wave (5) glowing Yo-Yo (6) strobing

Aura RGB brightness: 50% / 75% / 100%

Three brightness levels. The brightness can be switch by simple tap to fit the environment lighting and

5. Reset to factory mode

Press the button (2) and button (4) simultaneously to reset your chair to its factory defaults.



## 1. Armrest adjustment





Height adjustment (7cm)



the tilt

mechanism



Forward and backward 3 Rotation adjustment



### 3. Pull up the lever 4. Chair height 5. Lock/unlock 6. Seat rockability 7. Locking 2. Headrest adjustment hack.



Please do not excessively raise your headrest.

adiustment





# **Safety Notices**



- Sit in the center of the chair with your back against the backrest.
- Sit in the center of the chair with your back against the backrest.
- Sit in the center of the chair with your back against the backrest.
- Sit in the center of the chair with your back against the backrest.
- Sit in the center of the chair with •

your back against the backrest.

- your back against the backrest. Sit in the center of the chair with •
- your back against the backrest. of the chair.
- Sit in the center of the chair with Do not sit on the edge your back against the backrest. of the chair.
- Sit in the center of the chair with Do not sit on the edge of the chair.
- your back against the backrest. Sit in the center of the chair with • Do not sit on the edge your back against the backrest.
- of the chair. Sit in the center of the chair with • Do not sit on the edge
- of the chair. Sit in the center of the chair with Do not sit on the edge
  - of the chair.
- your back against the backrest. Sit in the center of the chair with • Do not sit on the edge your back against the backrest.



- Do not sit on the edge
- Do not sit on the edge of the chair.
- Do not sit on the edge of the chair.
- Do not sit on the edge of the chair.
- Do not sit on the edge of the chair.
- the chair. Do not sit on the edge
  - Do not stand on the chair.

the chair.

the chair.

Do not stand on

Do not stand on

- Do not stand on the chair.
- Do not stand on
- Do not stand on
- the chair.
- Do not stand on the chair.
- Do not stand on the chair.
- Do not stand on the chair.



- Do not stand on Do not push down on the reclined backrest when a person is on it.
- Do not push down on the reclined Do not stand on the chair backrest when a person is on it. Do not stand on
  - Do not push down on the reclined backrest when a person is on it.
  - Do not push down on the reclined backrest when a person is on it. Do not push down on the reclined
  - backrest when a person is on it. Do not push down on the reclined
  - backrest when a person is on it.
  - Do not push down on the reclined backrest when a person is on it.
  - Do not push down on the reclined backrest when a person is on it. Do not push down on the reclined
  - backrest when a person is on it. Do not push down on the reclined
  - backrest when a person is on it. Do not push down on the reclined
  - backrest when a person is on it. Do not push down on the reclined backrest when a person is on it.



- Keep your hands and fingers away from the recline mechanism
- from the recline mechanism
- Keep your hands and fingers away from the recline mechani:
- Keep your hands and fingers away from the recline mechanism.
- Keep your hands and fingers away from the recline mechanis
- Keep your hands and fingers away from the recline mechani
- Keep your hands and fingers away from the recline mechanism.
- Keep your hands and fingers away from the recline mechanism
- Keep your hands and fingers away from the recline mechanis
- Keep your hands and fingers away from the recline mechanism.
- Keep your hands and fingers away from the recline mechanism.
- Keep your hands and fingers away from the recline mechai

adiustment

- Keep your hands and fingers away
  - 3. Never assemble or disassemble your chair in an improper manner.
    - 5. Please watch your back when the backrest returns back to its original position from a reclined position.

WARNING!

pounds).

**WARNING!** 

improper assembly and/or usage

original position from a reclined position.

to pull up your headrest

This chair should only be used in a normal and non-abusive manner. We are not liable for any damages resulting from

2. The maximum recommended weight load is 120KG (264.5

3. Never assemble or disassemble your chair in an improper manner.

4. Please keep your chair out of direct sunlight to protect its leather.

6. To avoid damage to your chair, please do not use excessive force

7. Never try to open and touch the LED module as this will void the

8. The power input rating for this product is 5V/1A. Do not use a

. This chair should only be used in a normal and non-abusive

manner. We are not liable for any damages resulting from

. Never assemble or disassemble your chair in an improper manner.

4. Please keep your chair out of direct sunlight to protect its leather.

5. Please watch your back when the backrest returns back to its

6. To avoid damage to your chair, please do not use excessive force

7 Never try to open and touch the LFD module as this will void the

8. The power input rating for this product is 5V/1A. Do not use a power adapter with an output exceeding 5V/3A.

1. This chair should only be used in a normal and non-abusive manner. We are not liable for any damages resulting from

2. The maximum recommended weight load is 120KG (264.5

2. The maximum recommended weight load is 120KG (264.5

power adapter with an output exceeding 5V/3A.

improper assembly and/or usage.

original position from a reclined position.

to pull up your headrest.

improper assembly and/or usage.

5. Please watch your back when the backrest returns back to its

WARNING!

WARNING!

pounds).

- 6. To avoid damage to your chair, please do not use excessive force to pull up your headrest
- 7. Never try to open and touch the LFD module as this will void the warranty.
- 8. The power input rating for this product is 5V/1A. Do not use a power adapter with an output exceeding 5V/3A.


## WARNING!

- 1. This chair should only be used in a normal and non-abusive manner. We are not liable for any damages resulting from improper assembly and/or usage.
- 2. The maximum recommended weight load is 120KG (264.5 pounds).
- 3. Never assemble or disassemble your chair in an improper manner.
- 4. Please keep your chair out of direct sunlight to protect its leather.
- 5. Please watch your back when the backrest returns back to its original position from a reclined position.
- 6. To avoid damage to your chair, please do not use excessive force to pull up your headr
- 7. Never try to open and touch the LED module as this will void the
- 8. The power input rating for this product is 5V/1A. Do not use a power adapter with an output exceeding 5V/3A.

## WARNING!

- 1. This chair should only be used in a normal and non-abusive manner. We are not liable for any damages resulting from improper assembly and/or usage.
- 2. The maximum recommended weight load is 120KG (264.5
- 3. Never assemble or disassemble your chair in an improper manner.
- 4. Please keep your chair out of direct sunlight to protect its leather. 5. Please watch your back when the backrest returns back to its original position from a reclined position.
- 6. To avoid damage to your chair, please do not use excessive force to pull up your headres 7. Never try to open and touch the LED module as this will void the
- 8. The power input rating for this product is 5V/1A. Do not use a power adapter with an output exceeding 5V/3A.

### WARNING!



- 2. The maximum recommended weight load is 120KG (264.5 pounds).
- 3. Never assemble or disassemble your chair in an improper manner.

3. Never assemble or disassemble your chair in an improper manner.

4. Please keep your chair out of direct sunlight to protect its leather.

5. Please watch your back when the backrest returns back to its

6. To avoid damage to your chair, please do not use excessive force

7. Never try to open and touch the LED module as this will void the

8. The power input rating for this product is 5V/1A. Do not use a

1. This chair should only be used in a normal and non-abusive

2. The maximum recommended weight load is 120KG (264.5

3. Never assemble or disassemble your chair in an improper manner.

4. Please keep your chair out of direct sunlight to protect its leather.

6. To avoid damage to your chair, please do not use excessive force

7. Never try to open and touch the LED module as this will void the

8. The power input rating for this product is 5V/1A. Do not use a

power adapter with an output exceeding 5V/3A.

5. Please watch your back when the backrest returns back to its

manner. We are not liable for any damages resulting from

power adapter with an output exceeding 5V/3A.

original position from a reclined position

improper assembly and/or usage.

to pull up your headrest.

original position from a reclined position.

to pull up your headrest

WARNING!

pounds).

warrantv.

- 4. Please keep your chair out of direct sunlight to protect its leather.
- 5. Please watch your back when the backrest returns back to its
- original position from a reclined position. 6. To avoid damage to your chair, please do not use excessive force
- to pull up your headrest. 7. Never try to open and touch the LED module as this will void the
- warranty 8. The power input rating for this product is 5V/1A. Do not use a
- power adapter with an output exceeding 5V/3A.

### WARNING!

- 1. This chair should only be used in a normal and non-abusive manner. We are not liable for any damages resulting from improper assembly and/or usage
- 2. The maximum recommended weight load is 120KG (264.5 pounds).
- 3. Never assemble or disassemble your chair in an improper manner.
- 4. Please keep your chair out of direct sunlight to protect its leather. 5. Please watch your back when the backrest returns back to its original position from a reclined position.
- 6. To avoid damage to your chair, please do not use excessive force to pull up your headrest.
- 7. Never try to open and touch the LED module as this will void the warranty.
- 8. The power input rating for this product is 5V/1A. Do not use a power adapter with an output exceeding 5V/3A.

### WARNING

- 1. This chair should only be used in a normal and non-abusive manner. We are not liable for any damages resulting from improper assembly and/or usage.
- 2. The maximum recommended weight load is 120KG (264.5) pounds).
- 3. Never assemble or disassemble your chair in an improper manner.
- 4. Please keep your chair out of direct sunlight to protect its leather.
- 5. Please watch your back when the backrest returns back to its original position from a reclined position. 6. To avoid damage to your chair, please do not use excessive force
- to pull up your headrest. 4. Please keep your chair out of direct sunlight to protect its leather. 7. Never try to open and touch the LED module as this will void the
  - 8. The power input rating for this product is 5V/1A. Do not use a
  - power adapter with an output exceeding 5V/3A

## WARNING

- 1. This chair should only be used in a normal and non-abusive manner. We are not liable for any damages resulting from improper assembly and/or usage.
- 2 The maximum recommended weight load is 120KG (264.5) pounds).
- 3. Never assemble or disassemble your chair in an improper manner.
- 4. Please keep your chair out of direct sunlight to protect its leather. 5. Please watch your back when the backrest returns back to its
- original position from a reclined position. 6. To avoid damage to your chair, please do not use excessive force
- to pull up your headrest. 7. Never try to open and touch the LED module as this will void the
- 8. The power input rating for this product is 5V/1A. Do not use a power adapter with an output exceeding 5V/3A

## WARNING!

warranty.

- This chair should only be used in a normal and non-abusive manner. We are not liable for any damages resulting from improper assembly and/or usage.
- 2. The maximum recommended weight load is 120KG (264.5
- 3. Never assemble or disassemble your chair in an improper manner. 4. Please keep your chair out of direct sunlight to protect its leather.
- 5. Please watch your back when the backrest returns back to its original position from a reclined position.
- 6. To avoid damage to your chair, please do not use excessive force 7. Never try to open and touch the LED module as this will void the
- 8. The power input rating for this product is 5V/1A. Do not use a power adapter with an output exceeding 5V/3A.

## WARNING!

- 1. This chair should only be used in a normal and non-abusive manner. We are not liable for any damages resulting from improper assembly and/or usage.
- 2. The maximum recommended weight load is 120KG (264.5

### Federal Communications Commission Statement

This device has been tested and found to comply with the limits for a Class B device, pursuant to Part 15 of the FCC

These limits are designed to provide reasonable protection against harmful interference in a residential installation This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures

- Increase the separation between the equipment and receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.

• Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- This device may not cause harmful interference; and
- This device must accept any interference received including interference that may cause undesired operation

**CAUTION!** Any changes or modifications not expressly approved by the grantee of this device could void the user's authority to operate the equipment.

### 雷波障害自主規制について

この装置は、情報処理装置等電波障害自主規制協議会 (VCCI) の基準に基づく クラス B 情報技術 この表面は、同様放吐法は自ずも放降者自主が別断機器、「WCD」の歴年に基づく、フラスト 同様投資 装置です。この装置は、家庭環境で使用することを目的としていますが、この装置がラジオや テレビジョン受信機に近接して使用されると、受信障害を引き起こすことがあります。 取り扱い説明書に従って正しい取り扱いをしてください。







Cancer and Reproductive Harm-



电子电气产品有害物质限制使用标识:图中之数字为产品之环保使用期限。 仅指电子电气产 品中含有的有害物质不致发生外泄或突变, 从而对环境造成污染或对人身、 财产造成严重损

## 产品中有害物质的名称及含量

*** / # * * * * * * * * * * * * * * * *	有害物质							
部件名称	铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (Cr(VI))	多溴联苯 (PBB)	多溴二苯醚 (PBDE)		
印刷电路板及其电子组件	0	0	0	0	0	0		
外壳	0	0	0	0	0	0		
信号连接头及线材	0	0	0	0	0	0		
LED灯	0	0	0	0	0	0		

- ):表示该有害物质在该部件所有均质材料中的含量均在 GB/T 26572 规定的限量要求以下。
- :表示该有害物质至少在该部件的某一均质材料中的含量超出 GB/T 26572 规定的限量要求,然该部件(/ 符合欧盟指令 2011/65/EU 的规范。

备注:此产品所标示之环保使用期限,系指在一般正常使用状况下。

## ASUS Recycling/Takeback Services

ASUS recycling and takeback programs come from our commitment to the highest standards for protecting our environment. We believe in providing solutions for you to be able to responsibly recycle our products, batteries, other components, as well as the packaging materials. Please go to <a href="https://csr.asus.com/english/Takeback.htm">https://csr.asus.com/english/Takeback.htm</a> for the detailed recycling information in different regions.



CAUTION! DO NOT throw the product in municipal waste. This product has been designed to enable proper reuse of parts and recycling. This symbol of the crossed out wheeled bin indicates that the product (electrical and electronic equipment) should not be placed in municipal waste.

Check local regulations for disposal of electronic products.

이 기기는 가정용(B급)으로 전자파적합등록을 한 기기로서 주로 가정에서 사용하는 것을 목적으로하며 모든 지역에서 사용할 수 있습니다.

## **Українська** Спрощена декларація про відповідність нормам ЄС

ASUSTeK Computer Inc. заявляє, що цей пристрій відповідає основним вимогам та іншим відповідним овідних Директив. Повний текст декларації відповідності стандартам ЄС доступний на: <u>www.</u> asus.com/support.

# Официальное представительство в России Говячая линия Службы технической подпержки в России:

Бесплатный федеральный номер для звонков по России: 8-800-100-2787

Номер для пользователей в Москве: +7(495)231-1999

Время работы: Пн-Пт, 09:00 - 21:00 (по московскому времени)

Официальные сайты ASUS в России:

www.asus.com/ru/support

## **Authorised distributors in Turkey**

## PENTA TEKNOLOJI URUNLERI DAGITIM TICARET A.S.

Address, City: DUDULLU ORGANIZE SANAYI BOLGESI NATO YOLU 4.CAD. NO:1 DUDULLU UMRANIYE 34775 ISTANBUL TURKEY Distributor Tel: 0216 645 82 00

Country: TURKEY

## Bilkom Bilisim Hizmetleri A.S.

Address: Mahir z Cad. No:26 K:2 Alfunizade Üsküdar stanbul - Turkiye Distributor Tel: +90 216 554 9000 Country: TURKEY

C5 Elektronik Sanayi Ve Ticaret A.Ş.

Address: Sahrayıcedit Mah. Omca Sok. Golden Plaza No:33 E Blok Kat: 2 Kadıköy/ STANBUL Distributor Tel:+90 (216) 411 44 00 Country: TURKEY

## Manufacturer: ASUSTeK COMPUTER INC.

Address: 4F No.150, LI-TE RD., PEITOU, TAIPEI 112, TAIWAN

Location: IAIWAN Manufacturer Tel: 886-2-2894-3447

ASUS COMPUTER GmbH

**Address**: HARKORT STR. 21-23, 40880 RATINGEN, GERMANY **Tel**: +49-2102-5789555

AEEE Yönetmeliğine Uygundur.

E CE Mark Warning
This is a Class B produced This is a Class B product, in a domestic environment, this product may cause radio interference, in which case the user may be required to take adequate measures.

### English Simplified FU Declaration of Conformity

ASUSTEK Computer Inc. hereby declares that this device is in compliance with the essential requirements and other relevant provisions of related Directives. Full text of EU declaration of conformity is available at: <u>www.asus.com/support</u>

### Français Déclaration simplifiée de conformité de l'UE

AsusTek Computer Inc. déclare par la présente que cet appareil est conforme aux critères essentiels et autres clauses pertinentes des directives concernées. La déclaration de conformité de l'UE peut être téléchargée à partir du site Internet suivant : www.asus.com/support.

### **Deutsch** Vereinfachte EU-Konformitätserklärung

ASUSTEK Computer Inc. erklärt hiermit, dass dieses Gerät mit den wesentlichen Anforderungen und anderen relevanten Bestimmungen der zugehörigen Richtlinien übereinstimmt. Der gesamte Text der EU-Konformitätserklärung ist verfügbar unter: www.asus.com/support.

### Italiano Dichiarazione di conformità UE semplificata

ASUSTEK Computer Inc. con la presente dichiara che questo dispositivo è conforme ai requisiti essenziali e alle altre disposizioni pertinenti con le direttive correlate. Il testo completo della dichiarazione di conformità UE è disponibile all'indirizzo: www.asus.com/support.

### Русский Упрощенное заявление о соответствии европейской директиве

Компания ASUS заявляет, что это устройство соответствует основным требованиям и другим соответствующим условиям соответствующих директив. Подробную информацию, пожалуйста. смотрите на www.asus.com/support.

### Čeština Ziednodušené prohlášení o shodě EU

Společnost ASUSTeK Computer Inc. tímto prohlašuje, že toto zařízení splňuje základní požadavky a další příslušná ustanovení souvisejících směrnic. Plné znění prohlášení o shodě EU je k dispozici na adrese: <u>www.</u> asus.com/support.

## Magyar Egyszerűsített EU megfelelőségi nyilatkozat

Az ASUSTeK Computer Inc. ezennel kijelenti, hogy ez az eszköz megfelel a kapcsolódó Irányelvek lényeges követelményeinek és egyéb vonatkozó rendelkezéseinek. Az EU megfelelőségi nyilatkozat teljes szövege innen letölthető: www.asus.com/support.

## Polski Uproszczona deklaracja zgodności UE

Firma ASUSTeK Computer Inc. niniejszym oświadcza, że urządzenie to jest zgodne z zasadniczymi wymogami i innymi właściwymi postanowieniami powiązanych dyrektyw. Pełny tekst deklaracji zgodności UE jest dostepny pod adresem: www.asus.com/support.

## Português Declaração de Conformidade Simplificada da UE

A ASUSTeK Computer Inc. declara que este dispositivo está em conformidade com os requisitos essenciais e outras disposições relevantes das Diretivas relacionadas. Texto integral da declaração da UE disponível em: www.asus.com/support.

### Romană Declarație de conformitate UE, versiune simplificat

ASUSTeK Computer Inc. declară că acest dispozitiv se conformează cerințelor esențiale și altor prevederi relevante ale directivelor conexe. Textul complet al declarației de conformitate a Uniunii Europene se găsește la: www.asus.com/support.

## Slovensky Zjednodušené vyhlásenie o zhode platné pre EÚ

Spoločnosť ASUSTeK Computer Inc. týmto vyhlasuje, že toto zariadenie vyhovuje základným požiadavkám a ostatým príslušným ustanoveniam príslušných smerníc. Celý text vyhlásenia o zhode pre štáty EÚ je dostupný na adrese: www.asus.com/support

ASUSTeK Computer Inc. izjavlja, da je ta naprava skladna z bistvenimi zahtevami in drugimi ustreznimi določbami povezanih direktiv. Celotno besedilo EU-izjave o skladnosti je na voljo na spletnem mestu: www.asus.com/support.

## **Español** Declaración de conformidad simplificada para la UE

Por la presente, ASUSTeK Computer Inc. declara que este dispositivo cumple los requisitos básicos y otras disposiciones pertinentes de las directivas relacionadas. El texto completo de la declaración de la UE de conformidad está disponible en: www.asus.com/support.

# Türkce Basitlestirilmis AB Uyumluluk Bildirimi

AsusTek Computer İnc., bu aygıtın temel gereksinimlerle ve ilişkili Yönergelerin diğer ilgili koşullarıyla uyumlu olduğunu beyan eder. AB uygunluk bildiriminin tam metni şu adreste bulunabilir: <u>www.asus.</u> com/support.

## **Copyright Information**

You acknowledge that all rights of this Manual remain with ASUS. Any and all rights, including without limitation, in the Manual or website, are and shall remain the exclusive property of ASUS and/or its licensors. Nothing in this Manual intends to transfer any such rights, or to vest any such rights to you.

ASUS PROVIDES THIS MANUAL "AS IS" WITHOUT WARRANTY OF ANY KIND. SPECIFICATIONS AND INFORMATION CONTAINED IN THIS MANUAL ARE FURNISHED FOR INFORMATIONAL USE ONLY AND ARE SUBJECT TO CHANGE AT ANY TIME WITHOUT NOTICE, AND SHOULD NOT BE CONSTRUED AS A COMMITMENT BY ASUS.

## **Limitation of Liability**

Circumstances may arise where because of a default on ASUS' part or other liability, you are entitled to recover damages from ASUS. In each such instance, regardless of the basis on which you are entitled to claim damages from ASUS, ASUS is liable for no more than damages for bodily injury (including death) and damage to real property and tangible personal property; or any other actual and direct damages resulted from omission or failure of performing legal duties under this Warranty Statement, up to the listed contract price of each product.

### ASUS will only be responsible for or indemnify you for loss, damages or claims based in contract, tort or infringement under this Warranty Statement.

This limit also applies to ASUS' suppliers and its reseller. It is the maximum for which ASUS, its suppliers,

UNDER NO CIRCUMSTANCES IS ASUS LIABLE FOR ANY OF THE FOLLOWING: (1) THIRD-PARTY CLAIMS AGAINST YOU FOR DAMAGES: (2) LOSS OF, OR DAMAGE TO, YOUR RECORDS OR DATA: OR (3) SPECIAL. INCIDENTAL, OR INDIRECT DAMAGES OR FOR ANY ECONOMIC CONSEQUENTIAL DAMAGES (INCLUDING LOST PROFITS OR SAVINGS), EVEN IF ASUS, ITS SUPPLIERS OR YOUR RESELLER IS INFORMED OF THEIR POSSIBII ITY

## Service and Support

For multi-language manuals, please refer to ASUS web site: http://www.asus.com/support/

	Backrest		Wheels		Hydraulic lift cylinder
	Seat base		Side covers with bolts		Telescoping cover
	Lumbar cushion		Side covers with bolts		Hex Key
4.	Wheel base	7.	Control unit	12.	Spare bolt

Enalish

Note: The illustrations are for reference only and may differ from your actual chair in appearance and features

# B. Assembling your chair

A. Package Contents

- One by one, insert and push the wheels into the base.
- 2. Insert the hydraulic lift cylinder into the center hole of the base. Remove the red protective cap on top if there was anv.
- 3. Place the telescoping cover on the top of the hydraulic lift cylinder.

Armrests normally do not distinguish sides unless labeled otherwise.

- For models with armrest pre-assembled, please skip this step.
- 4. Remove the pre-assembled bolts and washers (1) & 3). Place the 4 large washers (1) between the armrest mounting bar (2) and the seat base. Hold the armrest in place, then insert and tighten all 4 bolts (3). Use the hex key to tighten them all, and repeat on the other side.
- Use the hex key to remove the pre-assembled bolts and washers from the backrest.
- Remove the protective foam covers from the brackets of the seat base. Then position the backrest carefully between the brackets. Insert and attach the 4 bolts (2 on each side) you removed in step 5 by hand first. Then use the hex key to tighten them. Start with the two bolts on the top of each side, then the
- Install the side covers and tighten the bolts. (The covers are marked "L" for the left side and "R" for the right on the inside.)
- 8. Now flip the chair over, facing down. Then remove the 4 pre-mounted bolts from the underside with
- 9. Repeat the step above to install the control unit, and then place the nut to mount the hydraulic lift cylinder facing the back of the seat (where the backrest is installed
- 10. Insert top of the hydraulic lift cylinder into the mounting hole on the control unit, and then turn the chair over in upright position. (Two-person handling required for your safety)

## C. Installing the Lumbar cushion

The chair and the Lumbar cushion are designed with Velcro fasteners. Attach the Lumbar cushion to the chair

## D. Lighting up your chair

- 1. Place your power bank into the packet at the back of the chair.
- 2. Connect the USB Type-A connector to your power bank.

The packet is attached to your chair with Velcro. You can easily remove and take it away.

### E. Other features

- a. Hanger at the back of the chair for hanging your bags, clothes, cups and more. Maximum load: 2kg
- Please do not hang items over 2kg.
- b. Using the RGB controller Rating: 5V=1A

## DO NOT remove the non-detachable controller as this will void the warranty.

## Aura RGB Lighting: On / Effect / Off

Press repeatedly to power the Aura RGB LEDs on or off, or cycle through the current 7 effects: (1) rainbow (2) breathing (3) color cycle (4) wave (5) glowing Yo-Yo (6) strobing (7) static Press the Aura RGB Lighting button for 3 seconds to terminate the lighting.

Press it to wake up again or reconnect your powerbank will keep its previous setting.

**NOTE**: Your powerbank may automatically adjust its output when the lighting is terminated. Disconnect and reconnect it if the Aura RGB Lighting cannot wake up after toggling it back on.

Press repeatedly to cycle through the following 8 striking colors: (1) red (2) orange (3) yellow (4) green (5) blue (6) indigo (7) purple (8) pink

NOTE: This feature is only available on the following Aura RGB effects: (2) breathing (6) strobing (7)

## Aura RGB speed: Slow / Medium / Fast

Press repeatedly to cycle through the following 3 color effect speeds: (1) Slow (2) Medium (3) Fast

**NOTE**: This feature is only available on the following Aura RGB effects: (1) rainbow (2) breathing (3) color cycle (4) wave (5) glowing Yo-Yo (6) strobing

Aura RGB brightness: 50% / 75% / 100% Three brightness levels. The brightness can be switch by simple tan to fit the environment lighting and

### 5. Reset to factory mode Press the button (2) and button (4) simultaneously to reset your chair to its factory defaults.

- F. Adjustable functions Armrest adjustment
- 2. Headrest adjustment
- 3. Backrest reclining 4. Chair height adjustment
- 5. Tilt lock
- 6. Seat rockability adjustment
- Locking caster
- 1. Armrest adjustment 1 Height adjustment
- Forward and backward Rotation adjustment
- 4 Inward and outward
- 2. Headrest adjustment Height adjustment (7cm)
- Please do not excessively raise your headrest. 3. Pull up the lever and slowly lean back.
- 5. Lock/unlock the tilt mechanism
- 6. Seat rockability adjustment 7 Locking caster

## English

## A. Package Contents

1.	Backrest	5.	Wheels	9.	Hydraulic lift cylinder
2.	Seat base		Side covers with bolts		Telescoping cover
3.	Lumbar cushion		Side covers with bolts		Нех Кеу
4.	Wheel base		Control unit	12.	Spare bolt

Note: The illustrations are for reference only and may differ from your actual chair in appearance and features.

## B. Assembling your chair

- 1. One by one, insert and push the wheels into the base.
- 2. Insert the hydraulic lift cylinder into the center hole of the base. Remove the red protective can on top if.
- . Place the telescoping cover on the top of the hydraulic lift cylinder.

Armrests normally do not distinguish sides unless labeled otherwise.

For models with armrest pre-assembled, please skip this step.

- Remove the pre-assembled bolts and washers (1) & (3). Place the 4 large washers (1) between the armrest mounting bar (2) and the seat base. Hold the armrest in place, then insert and tighten all 4 bolts (3). Use the hex key to tighten them all, and repeat on the other side.
- Use the hex key to remove the pre-assembled bolts and washers from the backrest
- Remove the protective foam covers from the brackets of the seat base. Then position the backrest carefully between the brackets. Insert and attach the 4 bolts (2 on each side) you removed in step 5 by hand first. Then use the hex key to tighten them. Start with the two bolts on the top of each side, then the
- Install the side covers and tighten the bolts. (The covers are marked "L" for the left side and "R" for the right
- 8. Now flip the chair over, facing down. Then remove the 4 pre-mounted bolts from the underside with . Repeat the step above to install the control unit, and then place the nut to mount the hydraulic lift
- cylinder facing the back of the seat (where the backrest is installed) 10. Insert top of the hydraulic lift cylinder into the mounting hole on the control unit, and then turn the chair over in upright position. (Two-person handling required for your safety)

## C. Installing the Lumbar cushion

he chair and the Lumbar cushion are designed with Velcro fasteners. Attach the Lumbar cushion to the chair ising the Velcro fasteners

## D. Lighting up your chair Place your power bank into the packet at the back of the chair. Connect the USB Type-A connector to your power bank.The packet is attached to your chair with Velcro. You can easily remove and take it away.

a. Hanger at the back of the chair for hanging your bags, clothes, cups and more.

Maximum load: 2kg Please do not hang items over 2kg.

b. Using the RGB controller Rating: 5V=1A

DO NOT remove the non-detachable controller as this will void the warranty. Aura RGB Lighting: On / Effect / Off

Press repeatedly to power the Aura RGB LEDs on or off, or cycle through the current 7 effects: (1) rainbow (2) breathing (3) color cycle (4) wave (5) glowing Yo-Yo (6) strobing (7) static Press the Aura RGB Lighting button for 3 seconds to terminate the lighting.

Press it to wake up again or reconnect your powerbank will keep its previous setting. **NOTE**: Your powerbank may automatically adjust its output when the lighting is terminated.

# onnect and reconnect it if the Aura RGB Lighting cannot wake up after toggling it back on.

Aura RGB color Press repeatedly to cycle through the following 8 striking colors: (1) red (2) orange (3) yellow (4) green (5) blue (6) indigo (7) purple (8) pink

**NOTE**: This feature is only available on the following Aura RGB effects: (2) breathing (6) strobing (7)

# Aura RGB speed: Slow / Medium / Fast

Press repeatedly to cycle through the following 3 color effect speeds: (1) Slow (2) Medium (3) Fast **NOTE**: This feature is only available on the following Aura RGB effects: (1) rainbow (2) breathing (3)

## Aura RGB brightness: 50% / 75% / 100%

Three brightness levels. The brightness can be switch by simple tap to fit the environment lighting and Reset to factory mode

## Press the button (2) and button (4) simultaneously to reset your chair to its factory defaults. F. Adjustable functions

Armrest adjustment

5 Tilt lock

2. Headrest adjustment 3. Backrest reclining

4. Chair height adjustment

. Seat rockability adjustment . Locking caster

1. Armrest adjustment 1 Height adjustment Forward and backward 3 Rotation adjustment

4 Inward and outward 2. Headrest adjustment

Height adjustment (7cm) Please do not excessively raise your headrest. 3. Pull up the lever and slowly lean back.

4. Chair height adjustment

5. Lock/unlock the tilt mechanism

7. Locking caster

6. Seat rockability adjustment

### Enalish

1.	Backrest	5.	Wheels	9.	Hydraulic lift cylinder
2.	Seat base		Side covers with bolts		Telescoping cover
3.	Lumbar cushion		Side covers with bolts	11.	Hex Key
4.	Wheel base		Control unit	12.	Spare bolt

Note: The illustrations are for reference only and may differ from your actual chair in appearance and features

## B. Assembling your chair

- 1. One by one, insert and push the wheels into the base.
- 2. Insert the hydraulic lift cylinder into the center hole of the base. Remove the red protective cap on top if there was anv.
- 3 Place the telescoping cover on the top of the hydraulic lift cylinder Armrests normally do not distinguish sides unless labeled otherwise.

For models with armrest pre-assembled, please skip this step.

- 4. Remove the pre-assembled bolts and washers (1) & 3). Place the 4 large washers (1) between the armrest mounting bar (2) and the seat base. Hold the armrest in place, then insert and tighten all 4 bolts (3). Use the hex key to tighten them all, and repeat on the other side
- . Use the hex key to remove the pre-assembled bolts and washers from the backrest
- . Remove the protective foam covers from the brackets of the seat base. Then position the backrest carefully between the brackets. Insert and attach the 4 bolts (2 on each side) you removed in step 5 by hand first. Then use the hex key to tighten them. Start with the two bolts on the top of each side, then the
- Install the side covers and tighten the bolts. (The covers are marked "L" for the left side and "R" for the right
- 8. Now flip the chair over, facing down. Then remove the 4 pre-mounted bolts from the underside with
- 9. Repeat the step above to install the control unit, and then place the nut to mount the hydraulic lift cylinder facing the back of the seat (where the backrest is installe
- 10. Insert top of the hydraulic lift cylinder into the mounting hole on the control unit, and then turn the chair over in upright position. (Two-person handling required for your safety)

## C. Installing the Lumbar cushion

The chair and the Lumbar cushion are designed with Velcro fasteners. Attach the Lumbar cushion to the chair using the Velcro fasteners.

### D. Lighting up your chair

- 1. Place your power bank into the packet at the back of the chair.
- 2. Connect the USB Type-A connector to your power bank.
  The packet is attached to your chair with Velcro. You can easily remove and take it away.

## E. Other features

a. Hanger at the back of the chair for hanging your bags, clothes, cups and more. Maximum load: 2kg

Please do not hang items over 2kg.

 Using the RGB controller Rating: 5V=1A

## DO NOT remove the non-detachable controller as this will void the warranty.

## Aura RGB Lighting: On / Effect / Off

Press repeatedly to power the Aura RGB LEDs on or off, or cycle through the current 7 effects: (1) rainbow (2) breathing (3) color cycle (4) wave (5) glowing Yo-Yo (6) strobing (7) static

Press the Aura RGB Lighting button for 3 seconds to terminate the lighting.

Press it to wake up again or reconnect your powerbank will keep its previous setting

**NOTE**: Your powerbank may automatically adjust its output when the lighting is terminated. Disconnect and reconnect it if the Aura RGB Lighting cannot wake up after toggling it back on.

Press repeatedly to cycle through the following 8 striking colors: (1) red (2) orange (3) yellow (4) green (5) blue (6) indigo (7) purple (8) pin

**NOTE**: This feature is only available on the following Aura RGB effects: (2) breathing (6) strobing (7)

## . Aura RGB speed: Slow / Medium / Fast

Press repeatedly to cycle through the following 3 color effect speeds: (1) Slow (2) Medium (3) Fast

NOTE: This feature is only available on the following Aura RGB effects: (1) rainbow (2) breathing (3) color cycle (4) wave (5) glowing Yo-Yo (6) strobing

## . Aura RGB brightness: 50% / 75% / 100%

Three brightness levels. The brightness can be switch by simple tap to fit the environment lighting and

Reset to factory mode Press the button (2) and button (4) simultaneously to reset your chair to its factory defaults.

## F. Adjustable functions

- 2. Headrest adjustment
- 3 Rackrest reclining 4. Chair height adjustment
- 5 Tilt lock

- 7. Locking caster
- 6. Seat rockability adjustment

- 1. Armrest adjustment Height adjustment
- 2 Forward and backward
- Rotation adjustment
- 4 Inward and outward
- 2. Headrest adjustment Height adjustment (7cm)
- Please do not excessively raise your headrest.
- 3. Pull up the lever and slowly lean back.
- 4. Chair height adjustment
- 6. Seat rockability adjustment
- 7 Locking caster

## A. Package Contents

	Backrest		Wheels		Hydraulic lift cylinder
2.	Seat base	6.	Side covers with bolts	10.	Telescoping cover
3.	Lumbar cushion		Side covers with bolts	11.	Hex Key
4.	Wheel base	7.	Control unit	12.	Spare bolt

Note: The illustrations are for reference only and may differ from your actual chair in appearance and features.

### B. Assembling your chair

- One by one, insert and push the wheels into the base.
- Insert the hydraulic lift cylinder into the center hole of the base. Remove the red protective cap on top if there was anv.
- Place the telescoping cover on the top of the hydraulic lift cylinder. Armrests normally do not distinguish sides unless labeled otherwise. For models with armrest pre-assembled, please skip this step.
- 4. Remove the pre-assembled bolts and washers (1) & 3). Place the 4 large washers (1) between the armrest mounting bar (2) and the seat base. Hold the armrest in place, then insert and tighten all 4 bolts (3). Use the hex key to tighten them all, and repeat on the other side.
- Use the hex key to remove the pre-assembled bolts and washers from the backrest.
- . Remove the protective foam covers from the brackets of the seat base. Then position the backrest carefully between the brackets. Insert and attach the 4 bolts (2 on each side) you removed in step 5 by hand first. Then use the hex key to tighten them. Start with the two bolts on the top of each side, then the
- Install the side covers and tighten the bolts. (The covers are marked "L" for the left side and "R" for the right
- 8. Now flip the chair over, facing down. Then remove the 4 pre-mounted bolts from the underside with
- . Repeat the step above to install the control unit, and then place the nut to mount the hydraulic lift cylinder facing the back of the seat (where the backrest is installe

10. Insert top of the hydraulic lift cylinder into the mounting hole on the control unit, and then turn the chair over in upright position. (Two-person handling required for your safety)

## C. Installing the Lumbar cushion

The chair and the Lumbar cushion are designed with Velcro fasteners. Attach the Lumbar cushion to the chair using the Velcro fasteners.

## D. Lighting up your chair

- 1. Place your power bank into the packet at the back of the chair.
- Connect the USB Type-A connector to your power bank.The packet is attached to your chair with Velcro. You can easily remove and take it away.

## E. Other features

a. Hanger at the back of the chair for hanging your bags, clothes, cups and more. Maximum load: 2kg

Please do not hang items over 2kg.

b. Using the RGB controller Rating: 5V=1A

## DO NOT remove the non-detachable controller as this will void the warranty.

Aura RGB Lighting: On / Effect / Off

Press repeatedly to power the Aura RGB LEDs on or off, or cycle through the current 7 effects: (1) rainbow (2) breathing (3) color cycle (4) wave (5) glowing Yo-Yo (6) strobing (7) static

Press the Aura RGB Lighting button for 3 seconds to terminate the lighting.

Press it to wake up again or reconnect your powerbank will keep its previous setting.

**NOTE**: Your powerbank may automatically adjust its output when the lighting is terminated. Disconnect and reconnect it if the Aura RGB Lighting cannot wake up after toggling it back on.

Press repeatedly to cycle through the following 8 striking colors: (1) red (2) orange (3) yellow (4) green (5) blue (6) indigo (7) purple (8) pinl

NOTE: This feature is only available on the following Aura RGB effects: (2) breathing (6) strobing (7)

Aura RGB speed: Slow / Medium / Fast

Press repeatedly to cycle through the following 3 color effect speeds: (1) Slow (2) Medium (3) Fast

NOTE: This feature is only available on the following Aura RGB effects: (1) rainbow (2) breathing (3) color cycle (4) wave (5) glowing Yo-Yo (6) strobing

Aura RGB brightness: 50% / 75% / 100%

Three brightness levels. The brightness can be switch by simple tap to fit the environment lighting and

1. Armrest adjustment

. Reset to factory mode

Press the button (2) and button (4) simultaneously to reset your chair to its factory defaults.

# F. Adjustable functions

- 2. Headrest adjustment
- Backrest reclining
- 4. Chair height adjustment
- 5 Tilt lock 6. Seat rockability adjustment
- Locking caster
- Height adjustment Forward and backward
  - Rotation adjustment 4 Inward and outward
- 2. Headrest adjustment Height adjustment (7cm)
- Please do not excessively raise your headrest. 3. Pull up the lever and slowly lean back.
- 4. Chair height adjustment
- 6. Seat rockability adjustment
- 7 Locking caster

## A. Package Contents

1.	Backrest	5.	Wheels	9.	Hydraulic lift cylinder
2.	Seat base	6.	Side covers with bolts	10.	Telescoping cover
3.	Lumbar cushion		Side covers with bolts	11.	Hex Key
4.	Wheel base		Control unit	12.	Spare bolt

Note: The illustrations are for reference only and may differ from your actual chair in appearance and features.

# B. Assembling your chair

- Put on the gloves bef
- . One by one, insert and push the wheels into the base.
- 2. Insert the hydraulic lift cylinder into the center hole of the base. Remove the red protective cap on top if
- 3. Place the telescoping cover on the top of the hydraulic lift cylinder.
- Armrests normally do not distinguish sides unless labeled otherwise.
- For models with armrest pre-assembled, please skip this step.
- 4. Remove the pre-assembled bolts and washers (1) & (3). Place the 4 large washers (1) between the armrest mounting bar (2) and the seat base. Hold the armrest in place, then insert and tighten all 4 bolts (3). Use the hex key to tighten them all, and repeat on the other side.
- Use the hex key to remove the pre-assembled bolts and washers from the backrest
- Remove the protective foam covers from the brackets of the seat base. Then position the backrest carefully between the brackets. Insert and attach the 4 bolts (2 on each side) you removed in step 5 by hand first. Then use the hex key to tighten them. Start with the two bolts on the top of each side, then the
- Install the side covers and tighten the bolts. (The covers are marked "L" for the left side and "R" for the right
- 8. Now flip the chair over, facing down. Then remove the 4 pre-mounted bolts from the underside with
- 9. Repeat the step above to install the control unit, and then place the nut to mount the hydraulic lift cylinder facing the back of the seat (where the backrest is installed

### 10. Insert top of the hydraulic lift cylinder into the mounting hole on the control unit, and then turn the chair over in upright position. (Two-person handling required for your safety)

C. Installing the Lumbar cushion he chair and the Lumbar cushion are designed with Velcro fasteners. Attach the Lumbar cushion to the chair using the Velcro fasteners.

- D. Lighting up your chair Place your power bank into the packet at the back of the chair.
- 2. Connect the USB Type-A connector to your power bank.

The packet is attached to your chair with Velcro. You can easily remove and take it away.

### E. Other features

a. Hanger at the back of the chair for hanging your bags, clothes, cups and more.

Maximum load: 2kg Please do not hang items over 2kg.

b. Using the RGB controller

## Rating: 5V=1A DO NOT remove the non-detachable controller as this will void the warranty.

Aura RGB Lighting: On / Effect / Off Press repeatedly to power the Aura RGB LEDs on or off, or cycle through the current 7 effects: (1) rainbow (2) breathing (3) color cycle (4) wave (5) glowing Yo-Yo (6) strobing (7)

Press the Aura RGB Lighting button for 3 seconds to terminate the lighting. Press it to wake up again or reconnect your powerbank will keep its previous setting.

**NOTE**: Your powerbank may automatically adjust its output when the lighting is terminated. Disconnect and reconnect it if the Aura RGB Lighting cannot wake up after toggling it back on.

Press repeatedly to cycle through the following 8 striking colors: (1) red (2) orange (3) yellow (4) green (5) blue (6) indigo (7) purple (8) pink

**NOTE**: This feature is only available on the following Aura RGB effects: (2) breathing (6) strobing (7)

## Aura RGB speed: Slow / Medium / Fast

Press repeatedly to cycle through the following 3 color effect speeds: (1) Slow (2) Medium (3) Fast

**NOTE:** This feature is only available on the following Aura RGB effects: (1) rainbow (2) breathing (3) color cycle (4) wave (5) glowing Yo-Yo (6) strobing 4. Aura RGB brightness: 50% / 75% / 100%

Three brightness levels. The brightness can be switch by simple tap to fit the environment lighting and

### Reset to factory mode Press the button (2) and button (4) simultaneously to reset your chair to its factory defaults.

F. Adjustable functions

- Armrest adjustment 2. Headrest adjustment
- 3. Backrest reclining
- 4 Chair height adjustment
- 5 Tilt lock 6. Seat rockability adjustment Locking caster
- 1. Armrest adjustment
- 1 Height adjustment Forward and backward Rotation adjustment
- 4 Inward and outward 2. Headrest adjustment
- Height adjustment (7cm) Please do not excessively raise your headrest.

6. Seat rockability adjustment

- 3. Pull up the lever and slowly lean back. 4. Chair height adjustment 5. Lock/unlock the tilt mechanism
- 7. Locking caster

## A. Package Contents

1.	Backrest	5.	Wheels	9.	Hydraulic lift cylinder
2.	Seat base	6.	Side covers with bolts	10.	Telescoping cover
	Lumbar cushion		Side covers with bolts	11.	Hex Key
	Wheel base		Control unit	12.	Spare bolt

Note: The illustrations are for reference only and may differ from your actual chair in appearance and features

## B. Assembling your chair

- Put on the gloves before installation.
- . One by one, insert and push the wheels into the base.
- 2. Insert the hydraulic lift cylinder into the center hole of the base. Remove the red protective cap on top if
- 3. Place the telescoping cover on the top of the hydraulic lift cylinder.
- Armrests normally do not distinguish sides unless labeled otherwise.
- For models with armrest pre-assembled, please skip this step.
- 4. Remove the pre-assembled bolts and washers (1) & (3). Place the 4 large washers (1) between the armrest mounting bar (2) and the seat base. Hold the armrest in place, then insert and tighten all 4 bolts (3). Use the hex key to tighten them all, and repeat on the other side.
- . Use the hex key to remove the pre-assembled bolts and washers from the backrest.
- Remove the protective foam covers from the brackets of the seat base. Then position the backrest carefully between the brackets. Insert and attach the 4 bolts (2 on each side) you removed in step 5 by hand first. Then use the hex key to tighten them. Start with the two bolts on the top of each side, then the
- . Install the side covers and tighten the bolts. (The covers are marked "L" for the left side and "R" for the right
- 8. Now flip the chair over, facing down. Then remove the 4 pre-mounted bolts from the underside with 9. Repeat the step above to install the control unit, and then place the nut to mount the hydraulic lift
- cylinder facing the back of the seat (where the backrest is installed 10. Insert top of the hydraulic lift cylinder into the mounting hole on the control unit, and then turn the chair over in upright position. (Two-person handling required for your safety)

### C. Installing the Lumbar cushion he chair and the Lumbar cushion are designed with Velcro fasteners. Attach the Lumbar cushion to the chair

- D. Lighting up your chair
- Place your power bank into the packet at the back of the chair. 2. Connect the USB Type-A connector to your power bank.

The packet is attached to your chair with Velcro. You can easily remove and take it away. E. Other features

a. Hanger at the back of the chair for hanging your bags, clothes, cups and more. Maximum load: 2kg

b. Using the RGB controller

using the Velcro fasteners

- Please do not hang items over 2kg.
- Rating: 5V=1A DO NOT remove the non-detachable controller as this will void the warranty. Aura RGB Lighting: On / Effect / Off
- Press repeatedly to power the Aura RGB LEDs on or off, or cycle through the current 7 effects: (1) rainbow (2) breathing (3) color cycle (4) wave (5) glowing Yo-Yo (6) strobing (7) stational color cycle (4) wave (5) glowing Yo-Yo (6) strobing (7) stational cycle (8) breathing (8) color cycle (9) wave (9) glowing Yo-Yo (10) strobing (11) stational cycle (12) strobing (13) stational cycle (13) strobing (13) stational cycle (14) wave (15) glowing Yo-Yo (15) strobing (15) stational cycle (15) strobing (15) strobin
- Press the Aura RGB Lighting button for 3 seconds to terminate the lighting. Press it to wake up again or reconnect your powerbank will keep its previous setting.

**NOTE**: Your powerbank may automatically adjust its output when the lighting is terminated. Disconnect and reconnect it if the Aura RGB Lighting cannot wake up after toggling it back on. Press repeatedly to cycle through the following 8 striking colors: (1) red (2) orange (3) yellow (4) green (5)

blue (6) indigo (7) purple (8) pink **NOTE**: This feature is only available on the following Aura RGB effects: (2) breathing (6) strobing (7)

3. Aura RGB speed: Slow / Medium / Fast

Press repeatedly to cycle through the following 3 color effect speeds: (1) Slow (2) Medium (3) Fast **NOTE:** This feature is only available on the following Aura RGB effects: (1) rainbow (2) breathing (3) color cycle (4) wave (5) glowing Yo-Yo (6) strobing

Three brightness levels. The brightness can be switch by simple tap to fit the environment lighting and

## Reset to factory mode Press the button (2) and button (4) simultaneously to reset your chair to its factory defaults.

- F. Adjustable functions
- Armrest adjustment 2. Headrest adjustment
- 3. Backrest reclining 4 Chair height adjustment
- 5 Tilt lock 6. Seat rockability adjustment
- Locking caster
- 1. Armrest adjustment 1 Height adjustment
- Forward and backward Rotation adjustment
- 4 Inward and outward 2. Headrest adjustment
- Height adjustment (7cm) Please do not excessively raise your headrest. 3 Pull up the lever and slowly lean back
- 4. Chair height adjustment 5. Lock/unlock the tilt mechanism 6. Seat rockability adjustment
- 7. Locking caster

### A. Package Contents

1.	Backrest	5.	Wheels	9.	Hydraulic lift cylinder
2.	Seat base		Side covers with bolts		Telescoping cover
3.	Lumbar cushion		Side covers with bolts	11.	Hex Key
4.	Wheel base		Control unit	12.	Spare bolt

Note: The illustrations are for reference only and may differ from your actual chair in appearance and features.

### B. Assembling your chair

- One by one, insert and push the wheels into the base.
- 2. Insert the hydraulic lift cylinder into the center hole of the base. Remove the red protective cap on top if there was any
- 3 Place the telescoping cover on the top of the hydraulic lift cylinder Armrests normally do not distinguish sides unless labeled otherwise

For models with armrest pre-assembled, please skip this step.

- 1. Remove the pre-assembled bolts and washers (1) & 3). Place the 4 large washers (1) between the armrest mounting bar (2) and the seat base. Hold the armrest in place, then insert and tighten all 4 bolts (3). Use the hex key to tighten them all, and repeat on the other side.
- Use the hex key to remove the pre-assembled bolts and washers from the backrest.
- . Remove the protective foam covers from the brackets of the seat base. Then position the backrest carefully between the brackets. Insert and attach the 4 bolts (2 on each side) you removed in step 5 by hand first. Then use the hex key to tighten them. Start with the two bolts on the top of each side, then the hottom two
- Install the side covers and tighten the bolts. (The covers are marked "L" for the left side and "R" for the right
- 3. Now flip the chair over, facing down. Then remove the 4 pre-mounted bolts from the underside with
- 9. Repeat the step above to install the control unit, and then place the nut to mount the hydraulic lift cylinder facing the back of the seat (where the backrest is installed)
- 10. Insert top of the hydraulic lift cylinder into the mounting hole on the control unit, and then turn the chair over in upright position. (Two-person handling required for your safety)

### C. Installing the Lumbar cushion

The chair and the Lumbar cushion are designed with Velcro fasteners. Attach the Lumbar cushion to the chair using the Velcro fasteners.

### D. Lighting up your chair

- 1. Place your power bank into the packet at the back of the chair.
- 2. Connect the USB Type-A connector to your power bank. The packet is attached to your chair with Velcro. You can easily remove and take it away.

### E. Other features

a. Hanger at the back of the chair for hanging your bags, clothes, cups and more.

Maximum load: 2kg Please do not hang items over 2kg.

. Using the RGB controlle

Rating: 5V=1A DO NOT remove the non-detachable controller as this will void the warranty.

Aura RGB Lighting: On / Effect / Off

Press repeatedly to power the Aura RGB LEDs on or off, or cycle through the current 7 effects: (1) rainbow (2) breathing (3) color cycle (4) wave (5) glowing Yo-Yo (6) strobing (7) static

Press the Aura RGB Lighting button for 3 seconds to terminate the lighting.

Press it to wake up again or reconnect your powerbank will keep its previous setting.

**NOTE**: Your powerbank may automatically adjust its output when the lighting is terminated. Disconnect and reconnect it if the Aura RGB Lighting cannot wake up after toggling it back on

Press repeatedly to cycle through the following 8 striking colors: (1) red (2) orange (3) yellow (4) green (5) blue (6) indigo (7) purple (8) pin

NOTE: This feature is only available on the following Aura RGB effects: (2) breathing (6) strobing (7)

Aura RGB speed: Slow / Medium / Fast

Press repeatedly to cycle through the following 3 color effect speeds: (1) Slow (2) Medium (3) Fast

NOTE: This feature is only available on the following Aura RGB effects: (1) rainbow (2) breathing (3) color cycle (4) wave (5) glowing Yo-Yo (6) strobing

1. Aura RGB brightness: 50% / 75% / 100%

Three brightness levels. The brightness can be switch by simple tap to fit the environment lighting and

Reset to factory mode

Press the button (2) and button (4) simultaneously to reset your chair to its factory defaults

## F. Adjustable functions

- 2. Headrest adjustment
- 3 Backrest reclining
- 5 Tilt lock
- 6. Seat rockability adjustment
- 7. Locking caster
- 4. Chair height adjustment
- 1 Height adjustment Forward and backward Rotation adjustment
  - 4 Inward and outward

1. Armrest adjustment

- 2. Headrest adjustment
- Height adjustment (7cm)
- Please do not excessively raise your headrest.
- 3. Pull up the lever and slowly lean back.
- 4. Chair height adjustment
- 6. Seat rockability adjustment
- 7 Locking caster

## A. Package Contents

1.	Backrest	5.	Wheels	9.	Hydraulic lift cylinder
2.	Seat base	6.	Side covers with bolts	10.	Telescoping cover
3.	Lumbar cushion		Side covers with bolts	11.	Hex Key
4.	Wheel base		Control unit	12.	Spare bolt

Note: The illustrations are for reference only and may differ from your actual chair in appearance and features.

### B. Assembling your chair

- 1. One by one, insert and push the wheels into the base.
- 2. Insert the hydraulic lift cylinder into the center hole of the base. Remove the red protective cap on top if there was any
- 3 Place the telescoping cover on the top of the hydraulic lift cylinder Armrests normally do not distinguish sides unless labeled otherwise. For models with armrest pre-assembled, please skip this step.
- 4. Remove the pre-assembled bolts and washers (1) & (3). Place the 4 large washers (1) between the armrest mounting bar (2) and the seat base. Hold the armrest in place, then insert and tighten all 4 bolts (3). Use the hex key to tighten them all, and repeat on the other side.
- Use the hex key to remove the pre-assembled bolts and washers from the backrest.
- 6. Remove the protective foam covers from the brackets of the seat base. Then position the backrest carefully between the brackets. Insert and attach the 4 bolts (2 on each side) you removed in step 5 by hand first. Then use the hex key to tighten them. Start with the two bolts on the top of each side, then the
- Install the side covers and tighten the bolts. (The covers are marked "L" for the left side and "R" for the right
- 8. Now flip the chair over, facing down. Then remove the 4 pre-mounted bolts from the underside with
- . Repeat the step above to install the control unit, and then place the nut to mount the hydraulic lift cylinder facing the back of the seat (where the backrest is installed
- insert top of the hydraulic lift cylinder into the mounting hole on the control unit, and then turn the chair over in upright position. (Two-person handling required for your safety)

### C. Installing the Lumbar cushion

The chair and the Lumbar cushion are designed with Velcro fasteners. Attach the Lumbar cushion to the chair using the Velcro fasteners.

## D. Lighting up your chair

- 1. Place your power bank into the packet at the back of the chair.
- 2. Connect the USB Type-A connector to your power bank.

  The packet is attached to your chair with Velcro. You can easily remove and take it away.

## E. Other features

a. Hanger at the back of the chair for hanging your bags, clothes, cups and more.

Maximum load: 2kg

Please do not hang items over 2kg. Using the RGB controller

Rating: 5V=1A

## DO NOT remove the non-detachable controller as this will void the warranty.

Aura RGB Lighting: On / Effect / Off

Press repeatedly to power the Aura RGB LEDs on or off, or cycle through the current 7 effects: (1) rainbow (2) breathing (3) color cycle (4) wave (5) glowing Yo-Yo (6) strobing (7) static

Press the Aura RGB Lighting button for 3 seconds to terminate the lighting.

Press it to wake up again or reconnect your powerbank will keep its previous setting

**NOTE**: Your powerbank may automatically adjust its output when the lighting is terminated. Disconnect and reconnect it if the Aura RGB Lighting cannot wake up after toggling it back on.

Press repeatedly to cycle through the following 8 striking colors: (1) red (2) orange (3) yellow (4) green (5)

NOTE: This feature is only available on the following Aura RGB effects: (2) breathing (6) strobing (7)

Aura RGB speed: Slow / Medium / Fast

Press repeatedly to cycle through the following 3 color effect speeds: (1) Slow (2) Medium (3) Fast

NOTE: This feature is only available on the following Aura RGB effects: (1) rainbow (2) breathing (3)

Aura RGB brightness: 50% / 75% / 100%

Three brightness levels. The brightness can be switch by simple tap to fit the environment lighting and

Reset to factory mode

Press the button (2) and button (4) simultaneously to reset your chair to its factory defaults

## F. Adjustable functions

- 2. Headrest adjustment
- 3 Backrest reclining
- 4. Chair height adjustment 5 Tilt lock
- 6. Seat rockability adjustment 7. Locking caster
- 1. Armrest adjustment
- 1 Height adjustment 2 Forward and backward
- Rotation adjustment
- 4 Inward and outward
- 2. Headrest adjustment
- Height adjustment (7cm) Please do not excessively raise your headrest.
- 3. Pull up the lever and slowly lean back.
- 4. Chair height adjustment
- 6. Seat rockability adjustment
- 7 Locking caster

## English

### Backrest Wheels Hydraulic lift cylinder Seat base Side covers with bolts Telescoping cover Lumbar cushion Side covers with bolts Hex Key Wheel base Control unit Spare bolt

Note: The illustrations are for reference only and may differ from your actual chair in appearance and features

## B. Assembling your chair

A. Package Contents

Put on the gloves before installation

- . One by one, insert and push the wheels into the base.
- 2. Insert the hydraulic lift cylinder into the center hole of the base. Remove the red protective cap on top if
- 3. Place the telescoping cover on the top of the hydraulic lift cylinder.

Armrests normally do not distinguish sides unless labeled otherwise.

For models with armrest pre-assembled, please skip this step.

- Remove the pre-assembled bolts and washers (1) & (3)). Place the 4 large washers (1) between the armrest mounting bar (2) and the seat base. Hold the armrest in place, then insert and tighten all 4 bolts (3). Use the hex key to tighten them all, and repeat on the other side. . Use the hex key to remove the pre-assembled bolts and washers from the backrest.
- Remove the protective foam covers from the brackets of the seat base. Then position the backrest een the brackets. Insert and attach the 4 bolts (2 on each side) you removed in step 5 by hand first. Then use the hex key to tighten them. Start with the two bolts on the top of each side, then the
- Install the side covers and tighten the bolts. (The covers are marked "L" for the left side and "R" for the right
- 3. Now flip the chair over, facing down. Then remove the 4 pre-mounted bolts from the underside with
- 9. Repeat the step above to install the control unit, and then place the nut to mount the hydraulic lift cylinder facing the back of the seat (where the backrest is installed

## 10. Insert top of the hydraulic lift cylinder into the mounting hole on the control unit, and then turn the chair over in upright position. (Two-person handling required for your safety)

C. Installing the Lumbar cushion The chair and the Lumbar cushion are designed with Velcro fasteners. Attach the Lumbar cushion to the chair using the Velcro fasteners.

- D. Lighting up your chair . Place your power bank into the packet at the back of the chair.
- 2. Connect the USB Type-A connector to your power bank.

he packet is attached to your chair with Velcro. You can easily remove and take it away.

## E. Other features

a. Hanger at the back of the chair for hanging your bags, clothes, cups and more.

Maximum load: 2kg Please do not hang items over 2kg.

o. Using the RGB controller

## Rating: 5V=1A DO NOT remove the non-detachable controller as this will void the warranty.

Aura RGB Lighting: On / Effect / Off Press repeatedly to power the Aura RGB LEDs on or off, or cycle through the current 7 effects: (1) rainbow (2) breathing (3) color cycle (4) wave (5) glowing Yo-Yo (6) strobing (7) static

Press the Aura RGB Lighting button for 3 seconds to terminate the lighting. Press it to wake up again or reconnect your powerbank will keep its previous setting.

**NOTE**: Your powerbank may automatically adjust its output when the lighting is terminated. Disconnect and reconnect it if the Aura RGB Lighting cannot wake up after toggling it back on.

Press repeatedly to cycle through the following 8 striking colors: (1) red (2) orange (3) yellow (4) green (5) blue (6) indigo (7) purple (8) pink

NOTE: This feature is only available on the following Aura RGB effects: (2) breathing (6) strobing (7)

Aura RGR speed: Slow / Medium / Fast

Press repeatedly to cycle through the following 3 color effect speeds: (1) Slow (2) Medium (3) Fast

NOTE: This feature is only available on the following Aura RGB effects: (1) rainbow (2) breathing (3) color cycle (4) wave (5) glowing Yo-Yo (6) strobing

## Aura RGB brightness: 50% / 75% / 100%

Three brightness levels. The brightness can be switch by simple tap to fit the environment lighting and

## Press the button (2) and button (4) simultaneously to reset your chair to its factory defaults.

. Reset to factory mode

F. Adjustable functions

- Armrest adjustment . Headrest adjustment
- B. Backrest reclining
- 4 Chair height adjustment 5 Tilt lock

Locking caster

- 5. Seat rockability adjustment
- 1 Armrest adjustment
- 1 Height adjustment 2 Forward and backward
- Rotation adjustment 4 Inward and outward 2. Headrest adjustment
- Height adjustment (7cm) Please do not excessively raise your headrest. 3 Pull up the lever and slowly lean back
- 4. Chair height adjustment 5. Lock/unlock the tilt mechanism 6. Seat rockability adjustment
- 7. Locking caster

## A. Package Contents

1.	Backrest	5.	Wheels	9.	Hydraulic lift cylinder
2.	Seat base	6.	Side covers with bolts	10.	Telescoping cover
3.	Lumbar cushion		Side covers with bolts	11.	Hex Key
4.	Wheel base		Control unit	12.	Spare bolt

Note: The illustrations are for reference only and may differ from your actual chair in appearance and features.

## B. Assembling your chair

- One by one, insert and push the wheels into the base.
- 2. Insert the hydraulic lift cylinder into the center hole of the base. Remove the red protective cap on top if
- . Place the telescoping cover on the top of the hydraulic lift cylinder.

Armrests normally do not distinguish sides unless labeled otherwise.

For models with armrest pre-assembled, please skip this step.

- . Remove the pre-assembled bolts and washers (1) & (3)). Place the 4 large washers (1) between the armrest mounting bar (2) and the seat base. Hold the armrest in place, then insert and tighten all 4 bolts (3). Use the hex key to tighten them all, and repeat on the other side.
- . Use the hex key to remove the pre-assembled bolts and washers from the backrest
- Remove the protective foam covers from the brackets of the seat base. Then position the backrest een the brackets. Insert and attach the 4 bolts (2 on each side) you removed in step 5 by hand first. Then use the hex key to tighten them. Start with the two bolts on the top of each side, then the
- Install the side covers and tighten the bolts. (The covers are marked "L" for the left side and "R" for the right
- . Now flip the chair over, facing down. Then remove the 4 pre-mounted bolts from the underside with 9. Repeat the step above to install the control unit, and then place the nut to mount the hydraulic lift
- cylinder facing the back of the seat (where the backrest is installe 10. Insert top of the hydraulic lift cylinder into the mounting hole on the control unit, and then turn the chair over in upright position. (Two-person handling required for your safety)

### C. Installing the Lumbar cushion The chair and the Lumbar cushion are designed with Velcro fasteners. Attach the Lumbar cushion to the chair

- D. Lighting up your chair
- . Place your power bank into the packet at the back of the chair. . Connect the USB Type-A connector to your power bank.

he packet is attached to your chair with Velcro. You can easily remove and take it away.

E. Other features a. Hanger at the back of the chair for hanging your bags, clothes, cups and more.

ising the Velcro fasteners

Maximum load: 2kg Please do not hang items over 2kg.

 Using the RGB controller Rating: 5V=1A

DO NOT remove the non-detachable controller as this will void the warranty. Aura RGB Lighting: On / Effect / Off

Press repeatedly to power the Aura RGB LEDs on or off, or cycle through the current 7 effects: (1) rainbow (2) breathing (3) color cycle (4) wave (5) glowing Yo-Yo (6) strobing (7) static Press the Aura RGB Lighting button for 3 seconds to terminate the lighting.

Press it to wake up again or reconnect your powerbank will keep its previous setting. **NOTE**: Your powerbank may automatically adjust its output when the lighting is terminated. Disconnect and reconnect it if the Aura RGB Lighting cannot wake up after toggling it back on.

Press repeatedly to cycle through the following 8 striking colors: (1) red (2) orange (3) yellow (4) green (5)

blue (6) indigo (7) purple (8) pink **NOTE:** This feature is only available on the following Aura RGB effects: (2) breathing (6) strobing (7)

. Aura RGB speed: Slow / Medium / Fast Press repeatedly to cycle through the following 3 color effect speeds: (1) Slow (2) Medium (3) Fast

NOTE: This feature is only available on the following Aura RGB effects: (1) rainbow (2) breathing (3) color cycle (4) wave (5) glowing Yo-Yo (6) strobing . Aura RGB brightness: 50% / 75% / 100% Three brightness levels. The brightness can be switch by simple tap to fit the environment lighting and

. Reset to factory mode

Press the button (2) and button (4) simultaneously to reset your chair to its factory defaults. F. Adjustable functions

Armrest adjustment Headrest adjustment

3. Backrest reclining 4 Chair height adjustment

Locking caster

5 Tilt lock 5. Seat rockability adjustment

- 1 Armrest adjustment 1 Height adjustment
- Forward and backward Rotation adjustment
- 4 Inward and outward 2. Headrest adjustment Height adjustment (7cm)
- Please do not excessively raise your headrest. 3 Pull up the lever and slowly lean back
- 5. Lock/unlock the tilt mechanism 6. Seat rockability adjustment

4. Chair height adjustment

7. Locking caster

### English

## A. Package Contents

1.	Backrest	5.	Wheels	9.	Hydraulic lift cylinder
2.	Seat base	6.	Side covers with bolts	10.	Telescoping cover
3.	Lumbar cushion		Side covers with bolts	11.	Hex Key
4.	Wheel base		Control unit	12.	Spare bolt

Note: The illustrations are for reference only and may differ from your actual chair in appearance and features

**B. Assembling your chair**Put on the gloves before installation.

- 1. One by one, insert and push the wheels into the base.
- 2. Insert the hydraulic lift cylinder into the center hole of the base. Remove the red protective cap on top if there was any.
- 3. Place the telescoping cover on the top of the hydraulic lift cylinder. Armrests normally do not distinguish sides unless labeled otherwise.

For models with armrest pre-assembled, please skip this step.

- 4. Remove the pre-assembled bolts and washers ( $\bigcirc$  ). Place the 4 large washers ( $\bigcirc$ ) between the armrest mounting bar (2) and the seat base. Hold the armrest in place, then insert and tighten all 4 bolts (3). Use the hex key to tighten them all, and repeat on the other side.
- . Use the hex key to remove the pre-assembled bolts and washers from the backrest.
- 6. Remove the protective foam covers from the brackets of the seat base. Then position the backrest carefully between the brackets. Insert and attach the 4 bolts (2 on each side) you removed is step 5 by hand first. Then use the hex key to tighten them. Start with the two bolts on the top of each side, then the
- Install the side covers and tighten the bolts. (The covers are marked "L" for the left side and "R" for the right
- 8. Now flip the chair over, facing down. Then remove the 4 pre-mounted bolts from the underside with
- 9. Repeat the step above to install the control unit, and then place the nut to mount the hydraulic lift cylinder facing the back of the seat (where the backrest is installed)
- 10. Insert top of the hydraulic lift cylinder into the mounting hole on the control unit, and then turn the chair over in upright position. (Two-person handling required for your safety)

## C. Installing the Lumbar cushion

The chair and the Lumbar cushion are designed with Velcro fasteners. Attach the Lumbar cushion to the chair using the Velcro fasteners.

# D. Lighting up your chair

- 1. Place your power bank into the packet at the back of the chair.

Connect the USB Type-A connector to your power bank.
 The packet is attached to your chair with Velcro. You can easily remove and take it away.

## E. Other features

a. Hanger at the back of the chair for hanging your bags, clothes, cups and more.

Maximum load: 2kg

Please do not hang items over 2kg. b. Using the RGB controller

Rating: 5V=1A

## DO NOT remove the non-detachable controller as this will void the warranty.

. Aura RGB Lighting: On / Effect / Off

Press repeatedly to power the Aura RGB LEDs on or off, or cycle through the current 7 effects: (1) rainbow (2) breathing (3) color cycle (4) wave (5) glowing Yo-Yo (6) strobing (7) static

Press the Aura RGB Lighting button for 3 seconds to terminate the lighting.

Press it to wake up again or reconnect your powerbank will keep its previous setting

**NOTE**: Your powerbank may automatically adjust its output when the lighting is terminated. Disconnect and reconnect it if the Aura RGB Lighting cannot wake up after toggling it back on.

Press repeatedly to cycle through the following 8 striking colors: (1) red (2) orange (3) yellow (4) green (5) blue (6) indigo (7) purple (8) pink

NOTE: This feature is only available on the following Aura RGB effects: (2) breathing (6) strobing (7)

i. Aura RGB speed: Slow / Medium / Fast

Press repeatedly to cycle through the following 3 color effect speeds: (1) Slow (2) Medium (3) Fast

**NOTE:** This feature is only available on the following Aura RGB effects: (1) rainbow (2) breathing (3) color cycle (4) wave (5) glowing Yo-Yo (6) strobing

4. Aura RGB brightness: 50% / 75% / 100%

Three brightness levels. The brightness can be switch by simple tap to fit the environment lighting and

5. Reset to factory mode

Press the button (2) and button (4) simultaneously to reset your chair to its factory defaults.

## F. Adjustable functions

- 2. Headrest adjustment
- 3. Backrest reclining
- 4. Chair height adjustment 5. Tilt lock
- 6. Seat rockability adjustment
- 7. Locking caster
- 1. Armrest adjustment 1 Height adjustment
- 2 Forward and backward
- 3 Rotation adjustment 4 Inward and outward
- 2. Headrest adjustment
- Height adjustment (7cm)
- Please do not excessively raise your headrest. 3. Pull up the lever and slowly lean back.
- 4. Chair height adjustment
- 6. Seat rockability adjustment
- 7. Locking caster