

Technical Accessory Guides (TAGs)

For Associates, Resellers, ISVs and Alliance Partners

Global



Version: Active-Only

Will only show products that are known to be available for sale

Need to provide an update or change?

Contact <mailto:pgw786@zebra.com>



For Internal Use by
PartnerConnect Members Only



TC7X Series Technical Accessory Guide



Note: TC70x/TC75x Android configurations discontinued 9/2021 - see PMB 10660
 TC70/TC75 Android configurations discontinued 2/2020 - see PMB 10263
 TC70x Windows 10 configurations discontinued 6/2018 - see PMB 3120

NOTE: This document is only for general reference. Solutions Pathway and related PMBs should be used for product availability, pricing, and final solution selection.

* Zebra does not endorse or specifically recommend any **third-party products, accessories, or hardware**. ZEBRA DISCLAIMS ANY AND ALL LIABILITY, INCLUDING ANY EXPRESS OR IMPLIED WARRANTIES, WHETHER ORAL OR WRITTEN, FOR SUCH THIRD PARTY PRODUCTS, ACCESSORIES, OR HARDWARE. THE CUSTOMER ACKNOWLEDGES THAT NO REPRESENTATION HAS BEEN MADE BY ZEBRA AS TO THE FITNESS OF THE THIRD-PARTY PRODUCTS, ACCESSORIES, OR HARDWARE FOR THE CUSTOMER'S INTENDED PURPOSE.

Cradles and Charging

Single Device Cradles

Part Number	Picture	Description	Notes	Required Items
CRD-TC7X-SE2CPP-01		Charge-Only ShareCradle (for all TC7X series)	<ul style="list-style-type: none"> ► Will charge both TC7X with Standard Capacity battery and one spare Standard Capacity battery. ► Supports charging of all TC7X series Standard Capacity spare battery types (Power Precision+ and non-Power Precision+). ► Blue dot/label on cradle distinguishes from TC70/TC75 cradle (CRD-TC7X-SE2CU1-01). ► Compatible with TC7X with a hand strap and Stylus attached ► Also compatible with Snap-On accessories attached (e.g. MSR, Trigger Handle etc...) ► Connects to charging connectors on bottom of TC7X for charging 	<ul style="list-style-type: none"> ► Power Supply (PWR-BGA12V50W0WW) ► DC Line Cord (CBL-DC-388A1-01) ► AC Line Cord (23844-00-00R or country specific version)
CRD-TC7X-SGL (kit includes US AC Line Cord, 23844-00-00R) CRD2SLOT-CLS-TC7XE (kit includes Australia AC Line Cord, 50-16000-217R)		Charge-Only ShareCradle Kit (for all TC7X series)	<ul style="list-style-type: none"> ► Will charge both TC7X with Standard Capacity battery and one spare Standard Capacity battery ► Supports charging of all TC7X series Standard Capacity spare battery types (Power Precision+ and non-Power Precision+). ► Blue dot/label on cradle distinguishes from TC70/TC75 cradle (CRD-TC7X-SE2CU1-01). ► Compatible with TC7X with a hand strap and Stylus attached ► Also compatible with Snap-On accessories attached (e.g. MSR, Trigger Handle etc...) ► Connects to charging connectors on bottom of TC7X for charging. ► Kit includes 2-Slot Cradle (CRD-TC7X-SE2CPP-01), Power Supply (PWR-BGA12V50W0WW), DC Line Cord (CBL-DC-388A1-01) and AC Line Cord (varies by SKU). ► NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item. 	



CRD-TC7X-SE1CO-01		Single Slot Charge-Only ShareCradle	<ul style="list-style-type: none"> ▶ Will charge TC7X device only. Does not charge spare battery. ▶ Compatible with TC7X with a hand strap and Stylus attached ▶ Also compatible with Snap-On accessories attached (e.g. MSR, Trigger Handle etc...) ▶ Connects to charging connectors on bottom of TC7X for charging. 	<ul style="list-style-type: none"> ▶ Power Supply (PWR-BGA12V50W0WW) ▶ DC Line Cord (CBL-DC-388A1-01) ▶ AC Line Cord (23844-00-00R or country specific version)
CRD-TC7X-SE2EPP-01		USB/Ethernet/Charging ShareCradle (for all TC7X series)	<ul style="list-style-type: none"> ▶ Will charge both TC7X with Standard Capacity battery and one spare Standard Capacity battery ▶ Supports charging of all TC7X series Standard Capacity spare battery types (Power Precision+ and non-Power Precision+). ▶ Blue dot/label on cradle distinguishes from TC70/TC75 cradle (CRD-TC7X-SE2EU1-01). ▶ Compatible with TC7X with a hand strap and Stylus attached ▶ NOT compatible with Snap-On accessories attached (e.g. MSR, Trigger Handle etc...) ▶ Connects to communication port on back side of TC7X for communications and charging. ▶ USB to Ethernet Module (MOD-MT2-EU1-01) integrated into the bottom of the cradle ▶ Mechanical switch selects between USB B port and RJ45 Ethernet jack. ▶ 10/100/1000 Mbps speed ▶ LEDs on module indicate connectivity and speed. 	<ul style="list-style-type: none"> ▶ Power Supply (PWR-BGA12V50W0WW) ▶ DC Line Cord (CBL-DC-388A1-01) ▶ AC Line Cord (23844-00-00R or country specific version) ▶ USB Cable (25-124330-01R) for PC connection
KT-CRDTC7X2E-01		USB/Ethernet/Charging ShareCradle KIT (for all TC7X series)	<ul style="list-style-type: none"> ▶ Will charge both TC7X with Standard Capacity battery and one spare Standard Capacity battery. ▶ Supports charging of all TC7X series Standard Capacity spare battery types (Power Precision+ and non-Power Precision+). ▶ Blue dot/label on cradle distinguishes from TC70/TC75 cradle (CRD-TC7X-SE2EU1-01). ▶ Compatible with TC7X with a hand strap and Stylus attached ▶ NOT compatible with Snap-On accessories attached (e.g. MSR, Trigger Handle etc...) ▶ Connects to communication port on back side of TC7X for communications and charging. ▶ USB to Ethernet Module (MOD-MT2-EU1-01) integrated into the bottom of the cradle ▶ Mechanical switch selects between USB B port and RJ45 Ethernet jack. ▶ 10/100/1000 Mbps speed ▶ LEDs on module indicate connectivity and speed. ▶ Kit includes Ethernet Cradle (CRD-TC7X-SE2EPP-01), Power Supply (PWR-BGA12V50W0WW), DC Line Cord (CBL-DC-388A1-01) and AC Line Cord (23844-00-00R). ▶ Kit is normally ordered by customers in North America and may be restricted for sale in other regions. 	<ul style="list-style-type: none"> ▶ USB Cable (25-124330-01R) for PC connection




MOD-MT2-EU1-01		USB to Ethernet Module	<ul style="list-style-type: none"> ► Attaches to 2-Slot USB/Charging ShareCradle (CRD-TC7X-SE2EU1-01) to provide Ethernet support ► Mechanical switch selects between USB B port and RJ45 Ethernet jack. ► 10/100/1000 Mbps speed ► LEDs on module indicate connectivity and speed. ► Already pre-installed on Ethernet Cradle (CRD-TC7X-SE2EU1-01). This would be a spare module if ordered for the TC7X. 	2-Slot USB/Charging ShareCradle (CRD-TC7X-SE2EU1-01)
CRD-TC7X-1SWS1-01		Workstation Docking Cradle	<ul style="list-style-type: none"> ► An enhanced single-slot charging cradle allowing users to use the TC72/TC77 as a workstation or kiosk. ► Cradle includes the following additional ports: <ul style="list-style-type: none"> - HDMI - Ethernet - 4 USB ports for keyboard, mouse, and other supported USB devices. ► Two USB ports are located on both sides of cradle. One port provides 1.5A current. The remaining three provide .5A current. ► Also includes Kensington port to secure the cradle to a desk location. Cradle can also be screwed down to desk/counter. ► Will charge TC7X only. Does not charge spare battery. ► Only compatible with TC72/TC77 devices. Not compatible with older generation TC7X units. 	<ul style="list-style-type: none"> ► Power Supply (PWR-BGA12V50W0WW) ► DC Line Cord (CBL-DC-388A1-01) ► AC Line Cord (23844-00-00R or country specific version)
MNT-TC7X-WM		Charge-Only Cradle Kit for inverted operations	<ul style="list-style-type: none"> ► Extends the use of the TC7X as a fixed scanner. ► Often used in Pharmacy operations. ► Firmly holds the TC7X in a downward facing direction with a range of motion allowing scanning angle to be adjusted. ► Connects to rugged charge connector on bottom of TC7X. ► Kit includes Charge-Only Vehicle Cradle (CRD-TC7X-CVCD1-01), RAM Suction Cup Mount (RAM-B-166U), Power Supply (PWR-BGA12V50W0WW), DC Line Cord (CBL-DC-388A1-01), and AC Line Cord (23844-00-00R). ► NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item. 	




<p>PSCTC7X-SCAN</p> <p>(3rd party) *</p> <p>http://www.portsmith.com</p>		<p>Portsmouth ScanStand Charge-Only Cradle Kit</p>	<ul style="list-style-type: none"> ► Extends the use of the TC7XX as a fixed scanner. ► Firmly holds the TC7X in a downward facing direction with a range of motion allowing scanning angle to be adjusted. ► Ruggedly made for enterprise use. ► Connects to rugged charge connector on bottom of TC7X. ► Kit includes Cradle and power supply. 	
Multi-Device Cradles				
Part Number	Picture	Description	Notes	Required Items
CRD-TC7X-SE2CU2-02		2-Slot Charge-Only ShareCradle	<ul style="list-style-type: none"> ► Will charge two TC7X units. Does not charge spare battery. ► Compatible with TC7X with a hand strap and Stylus attached ► Also compatible with Snap-On accessories attached (e.g. MSR, Trigger Handle etc...) ► Connects to charging connectors on bottom of TC7X for charging. 	<ul style="list-style-type: none"> ► Power Supply (PWR-BGA12V50W0WW) ► DC Line Cord (CBL-DC-388A1-01) ► AC Line Cord (23844-00-00P or country specific version)
CRD-TC7X-SE2NTT-01		TC7X/ZQ300 series Charge-Only ShareCradle	<ul style="list-style-type: none"> ► Will charge one TC7X and one ZQ300 series printer. ► Compatible with TC7X with a hand strap and Stylus attached ► Also compatible with Snap-On accessories attached (e.g. MSR, Trigger Handle etc...) ► Connects to charging connectors on bottom of TC7X for charging. <p>► NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item.</p>	<ul style="list-style-type: none"> ► Power Supply (PWR-BGA12V50W0WW) ► DC Line Cord (CBL-DC-388A1-01) ► AC Line Cord (23844-00-00P or country specific version)




<p>CRD-TC7X-SE2ENTT-01</p>		<p>TC7X/ZQ300 USB/Ethernet/Charging and Charge-Only ShareCradle</p>	<ul style="list-style-type: none"> ► Provides USB/Ethernet and Charging in left cradle slot for TC7X and Charge-Only in right cradle slot for ZQ300 printer. ► Compatible with TC7X with a hand strap and Stylus attached ► TC7X slot NOT compatible with Snap-On accessories attached (e.g. MSR, Trigger Handle etc...) ► TC7X cradle slot connects to communication port on back side of TC7X for communications and charging. ► USB to Ethernet Module (MOD-MT2-EU1-01) integrated into the bottom of the cradle ► Mechanical switch selects between USB B port and RJ45 Ethernet jack. ► 10/100/1000 Mbps speed ► LEDs on module indicate connectivity and speed. ► NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item. 	<ul style="list-style-type: none"> ► Power Supply (PWR-BGA12V50W0WW) ► DC Line Cord (CBL-DC-388A1-01) ► AC Line Cord (23844-00-00F or country specific version) ► USB Cable (25-124330-01R) for PC connection
<p>CRD-TC7X-SE2CO1-01</p>		<p>2-Slot ShareCradle - USB/Ethernet/Charging and Charge-Only</p>	<ul style="list-style-type: none"> ► Provides USB/Ethernet and Charging in left cradle slot and Charge-Only in right cradle slot. ► Compatible with TC7X with a hand strap and Stylus attached ► Left cradle slot NOT compatible with Snap-On accessories attached (e.g. MSR, Trigger Handle etc...) ► Left cradle slot connects to communication port on back side of TC7X for communications and charging. ► Right cradle slot connects to charging connectors on bottom of TC7X. ► USB to Ethernet Module (MOD-MT2-EU1-01) integrated into the bottom of the cradle ► Mechanical switch selects between USB B port and RJ45 Ethernet jack. ► 10/100/1000 Mbps speed ► LEDs on module indicate connectivity and speed. ► NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item. 	<ul style="list-style-type: none"> ► Power Supply (PWR-BGA12V50W0WW) ► DC Line Cord (CBL-DC-388A1-01) ► AC Line Cord (23844-00-00F or country specific version) ► USB Cable (25-124330-01R) for PC connection

CRD-TC7X-SE2EPP-02		2-Slot ShareCradle - Ethernet/Charging	<ul style="list-style-type: none"> ► Provides Ethernet and Charging on both the left and right cradle slots. ► Compatible with TC7X with a hand strap and Stylus attached ► NOT compatible with Snap-On accessories attached (e.g. MSR, Trigger Handle etc...) ► Connects to communication port on back side of TC7X for Ethernet connection and charging. ► 10/100/1000 Mbps speed ► LEDs on cradle indicates connectivity and speed. ► NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item. 	<ul style="list-style-type: none"> ► Power Supply (PWR-BGA12V50W0WW) ► DC Line Cord (CBL-DC-388A1-01) ► AC Line Cord (23844-00-00P or country specific version)
KT-CRD-TC7X-USPS02		2-Slot ShareCradle KIT - Ethernet/Charging	<ul style="list-style-type: none"> ► Provides Ethernet and Charging on both the left and right cradle slots. ► Compatible with TC7X with a hand strap and Stylus attached ► NOT compatible with Snap-On accessories attached (e.g. MSR, Trigger Handle etc...) ► Connects to communication port on back side of TC7X for communications and charging. ► USB to Ethernet Module (MOD-MT2-EU1-01) integrated into the bottom of the cradle ► Mechanical switch selects between USB B port and RJ45 Ethernet jack. ► 10/100/1000 Mbps speed ► LEDs on module indicate connectivity and speed. ► Kit includes: 2-Slot Ethernet ShareCradle (CRD-TC7X-SE2EPP-02), Power Supply (PWR-BGA12V50W0WW), DC Line Cord (CBL-DC-388A1-01) and AC Line Cord (23844-00-00R). ► NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item. 	
CRD-TC7X-SE5C1-01		5-Slot Charge-Only ShareCradle	<ul style="list-style-type: none"> ► Will charge up to five TC7X units ► Compatible with TC7X with a hand strap and Stylus attached ► Also compatible with Snap-On accessories attached (e.g. MSR, Trigger Handle etc...) ► Can accommodate either five TC7Xs or four TC7Xs and one 4-Slot Spare Battery Charger ► Can be racked/ mounted in a standard 19inch rack system via the mounting accessory ► Connects to charging connectors on bottom of TC7X for charging 	<ul style="list-style-type: none"> ► DC Line Cord (CBL-DC-382A1-01) and Power Supply (PWR-BGA12V108W0WW) ► AC Line Cord (23844-00-00P or country specific version)

<p>CRD-TC7X-SE5C-KT2 (include US AC Line Cord, 23844-00-00R)</p> <p>CRD5SLOT-CLS-TC7XC (includes Australia AC Line Cord, 50-16000-217R)</p>		<p>5-Slot Charge-Only ShareCradle Kit</p>	<ul style="list-style-type: none"> ▶ Will charge up to five TC7X units ▶ Compatible with TC7X with a hand strap and Stylus attached ▶ Also compatible with Snap-On accessories attached (e.g. MSR, Trigger Handle etc...) ▶ Can accommodate either five TC7Xs or four TC7Xs and one 4-Slot Spare Battery Charger ▶ Can be racked/ mounted in a standard 19inch rack system via the mounting accessory ▶ Connects to charging connectors on bottom of TC7X for charging ▶ Kit includes 5-Slot Charge-Only ShareCradle (CRD-TC7X-SE5C1-01), DC Line Cord (CBL-DC-381A1-01), Power Supply (PWR-BGA12V108W0WW), and AC Line Cord (varies by SKU) ▶ NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item. 	
<p>CRD-TC7X-SE5KT1-01</p>		<p>4-Slot Charge-Only ShareCradle with Spare Battery Charging slot</p>	<ul style="list-style-type: none"> ▶ Will charge up to four TC7X units and four spare batteries ▶ Compatible with TC7X with a hand strap and Stylus attached ▶ Also compatible with Snap-On accessories attached (e.g. MSR, Trigger Handle etc...) ▶ Can be racked/ mounted in a standard 19inch rack system via the mounting accessory ▶ Connects to charging connectors on bottom of TC7X for charging ▶ Includes 5-Slot Charge-Only ShareCradle (CRD-TC7X-SE5C1-01) with four TC7X slots and ShareCradle 4-Slot Battery Charger Adapter Cup (CUP-SE-BTYADP1-01) ▶ NOTE: Only one TC7X 4-Slot Battery Charger (SAC-TC7X-4BTYPP-01) can be installed on the 5-Slot ShareCradle. Charger is installed on left most slot on ShareCradle. 	<ul style="list-style-type: none"> ▶ DC Line Cord (CBL-DC-382A1-01) and Power Supply (PWR-BGA12V108W0WW) ▶ AC Line Cord (23844-00-00R or country specific version) ▶ 4-Slot Battery Charger (SAC-TC7X-4BTYPP-01)



CRD-TC7X-5C4B-KT1		4-Slot Charge-Only ShareCradle with Spare Battery Charging Kit (US)	<ul style="list-style-type: none"> ► Will charge up to four TC7X units and four spare batteries ► Compatible with TC7X with a hand strap and Stylus attached ► Also compatible with Snap-On accessories attached (e.g. MSR, Trigger Handle etc...) ► Can be racked/ mounted in a standard 19inch rack system via the mounting accessory ► Connects to charging connectors on bottom of TC7X for charging ► Kit includes 5-Slot Charge-Only ShareCradle with Spare Battery Charging (CRD-TC7X-SE5KT1-01), 4-Slot Battery Charger (SAC-TC7X-4BTYP-01), Battery Charger Cradle Adapter Cup (CUP-SE-BTYADP1-01), DC Line Cord (CBL-DC-381A1-01), Power Supply (PWR-BGA12V108W0WW), and AC Line Cord (23844-00-00R) ► NOTE: Only one TC7X 4-Slot Battery Charger (SAC-TC7X-4BTYP-01) can be installed on the 5-Slot ShareCradle. Charger is installed on left most slot on ShareCradle. ► NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item. 	
CRD-TC7X-5C4B-UK1		4-Slot Charge-Only ShareCradle with Spare Battery Charging Kit (for UK)	<ul style="list-style-type: none"> ► Will charge up to four TC7X units and four spare batteries ► Compatible with TC7X with a hand strap and Stylus attached ► Also compatible with Snap-On accessories attached (e.g. MSR, Trigger Handle etc...) ► Can be racked/ mounted in a standard 19inch rack system via the mounting accessory ► Connects to charging connectors on bottom of TC7X for charging ► Includes 5-Slot Charge-Only ShareCradle with Spare Battery Charging (CRD-TC7X-SE5KT1-01), 4-Slot Battery Charger (SAC-TC7X-4BTYP-01), Battery Charger Cradle Adapter Cup (CUP-SE-BTYADP1-01), DC Line Cord (CBL-DC-381A1-01), Power Supply (PWR-BGA12V108W0WW), and AC Line Cord for UK (50-16000-219R) ► NOTE: Only one TC7X 4-Slot Battery Charger (SAC-TC7X-4BTYP-01) can be installed on the 5-Slot ShareCradle. Charger is installed on left most slot on ShareCradle. 	
PSD4TC7X-01 (4-slot cradle) PSD6TC7X-01 (6-slot cradle) PSD8TC7X-01 (8-slot cradle) (3rd party) * http://www.portsmith.com		Portsmith Multi-Slot Charge-Only Dock Kit	<ul style="list-style-type: none"> ► Provides four, six or eight slot options ► LED status indicators. ► Precision alignment of the handheld into the cradle. ► One handed insertion and removal. ► Durable powder-coated metal chassis ► Injection molded cradles slots. ► Safe and regulated power at each cup - 5VDC 2A delivered to each slot. ► KIT Includes power supply and line cord for use in North America. 	




PSP5TC75-01 (3rd party) * http://www.portsmith.com		Portsmith 5-Slot Charge-Only Dock	<ul style="list-style-type: none"> ▶ Charges five devices per module from a single power supply. ▶ Durable rugged ABS cradle materials ▶ Precision alignment of the handheld into the cradle ▶ One handed insertion and removable ▶ Safe and regulated power at each cup - 5VDC 2A delivered to each slot ▶ Powder-coated steel chassis ▶ Better space efficiency compared to five individual charging docks ▶ Dimensions: 23" wide, 5" deep, 7" tall ▶ Includes power supply and line cord for use in North America. 	
PSP4TC75-02 (3rd party) * http://www.portsmith.com		Portsmith 4-Slot Charge-Only Dock - for Rack Mounting	<ul style="list-style-type: none"> ▶ Charges four devices per rack module from a single power supply. ▶ Durable rugged ABS cradle materials ▶ Precision alignment of the handheld into the cradle ▶ One handed insertion and removable ▶ Safe and regulated power at each cup - 5VDC 2A delivered to each slot ▶ Powder-coated steel chassis ▶ Mounts in any industry standard server or wall mount rack ▶ 6U or 10.5 inches tall ▶ Includes power supply and line cord for use in North America. 	
CRD-TC7X-SE5EU1-01		5-Slot Ethernet/Charging ShareCradle	<ul style="list-style-type: none"> ▶ Allows speeds up to 1 Gb ▶ Compatible with TC7X with a hand strap and Stylus attached. ▶ NOT compatible with Snap-On accessories attached (e.g. MSR, Trigger Handle etc...). ▶ NOT compatible with TC7X units having Trigger Handle Cleat (ADP-TC7X-CLH10) attached. Use CRD-TC7X-SE5EU1-TR instead. ▶ Can be racked/ mounted in a standard 19inch rack system via the mounting accessory ▶ Connects to communication/ charging port on back of TC7X for charging and communications. 	<ul style="list-style-type: none"> ▶ DC Line Cord (CBL-DC-382A1-01) and Power Supply (PWR-BGA12V108W0WW) ▶ AC Line Cord (23844-00-00P or country specific version)


KIT-CRD-TC7X-USPS		4-Slot Ethernet/Charging ShareCradle with Spare Battery Charging Kit (US)	<ul style="list-style-type: none"> ▶ Allows speeds up to 1 Gb ▶ Compatible with TC7X with a hand strap and Stylus attached. ▶ NOT compatible with Snap-On accessories attached (e.g. MSR, Trigger Handle etc...). ▶ NOT compatible with TC7X units having Trigger Handle Cleat (ADP-TC7X-CLH10) attached. Use CRD-TC7X-SE5EU1-TR instead. ▶ Can be racked/ mounted in a standard 19inch rack system via the mounting accessory ▶ Connects to communication/ charging port on back of TC7X for charging and communications. ▶ Kit includes 5-Slot Ethernet/Charging ShareCradle (CRD-TC7X-SE5EU1-01), 4-Slot Battery Charger (SAC-TC7X-4BTYP-01), Battery Charger Cradle Adapter Cup (CUP-SE-BTYADP1-01), DC Line Cord (CBL-DC-381A1-01), Power Supply (PWR-BGA12V108W0WW), and AC Line Cord (23844-00-00R) ▶ NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item. 	
CRD-TC7X-SE5EU1-TR		5-Slot Ethernet/Charging ShareCradle for Trigger Handle devices	<ul style="list-style-type: none"> ▶ Cradle has an additional notch in base accomodating TC7X units with Trigger Handle Cleat (ADP-TC7X-CLH10) attached. ▶ Allows speeds up to 1 Gb ▶ Compatible with TC7X with a hand strap and Stylus attached ▶ NOT compatible with Snap-On accessories attached (e.g. MSR, Trigger Handle etc...) ▶ Can be racked/ mounted in a standard 19inch rack system via the mounting accessory. ▶ Connects to communication/ charging port on back of TC7X for charging and communications. ▶ NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item. 	<ul style="list-style-type: none"> ▶ DC Line Cord (CBL-DC-382A1-01) and Power Supply (PWR-BGA12V108W0WW) ▶ AC Line Cord (23844-00-00R or country specific version)
CRD-TC7BASEONLY-01		5-Slot Ethernet/Charging ShareCradle Base	<ul style="list-style-type: none"> ▶ Includes base used on 5-Slot Ethernet ShareCradles. ▶ Does not include any device cradle cups. ▶ Used to replace damaged cradle base. ▶ NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item. 	

<p>CS-CRD-LOC-TC7 (includes locks for 5 cradle slots)</p> <p>CS-CRD-LOC-TC7-T (includes locks for 4 cradle slots - for multi-slot cradles with spare battery charger installed)</p>	 <p>ShareCradle not included - shown with TC5X series</p>	<p>Multi-Slot ShareCradle Locking Kit</p>	<ul style="list-style-type: none"> ► Kit allows Multi-Slot Charge-Only ShareCradles to be retrofitted with mechanical lock to prevent unauthorized use/theft. ► User must authenticate on device (via PIN code or barcode scan) before locking mechanism will release it. ► ShareCradle with Locking Kit can be installed inside Intelligent Cabinet, on Storage Rack or can be placed on desk/counter. ► Includes software app for device that enables the locking mechanism and Zebra Video on Device (VoD) for user training. ► Typically used with Zebra Intelligent Cabinet solution but can also be integrated with other applications using SDK. ► Not compatible with Snap-On accessories attached (e.g. Trigger Handle etc...) ► Lock taps into ShareCradle's power supply (PWR-BGA12V108W0WWW) using included pigtail cable. ► Device communicates with the cradle lock by sending a series of light pulses at the top of its display. The correct sequence of pulses unlocks the clamp/arm. ► Clamp/Arm operation details: <ul style="list-style-type: none"> - Clamp is held in place by gravity so the user has to physically raise the clamp to retrieve their device. - Clamp will then drop back down past the point where it would clamp a device. This lower position tells the clamp not to re-engage the lock. - The lock only re-engages when a device is present in the cradle and the clamp descends to the correct level. 	<p>Multi-Slot Charge-Only ShareCradle (i.e. CRD-TC7X-SE5C1-01 or similar)</p>
<p>CUP-TC7X-SEC01-02</p>		<p>Replacement Charge-Only ShareCradle Cup</p>	<ul style="list-style-type: none"> ► Can be used to replace a damaged cradle cup or can be used to create a multi-slot cradle supporting a mixed combination of devices (i.e. two TC21/TC26 and three TC7X series, etc.). ► Only compatible with cradles that use ShareCradle design (i.e. TC7X series). ► NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item. 	
<p>CUP-TC7X-SECM1-02</p>		<p>Replacement Charge + Communication ShareCradle Cup</p>	<ul style="list-style-type: none"> ► Can be used to replace a damaged cradle cup or can be used to create a multi-slot cradle supporting a mixed combination of devices (i.e. two TC21/TC26 and three TC7X series, etc.). ► Only compatible with cradles that use ShareCradle design (i.e. TC7X series). ► NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item. 	




BRKT-SCRD-SMRK-01		5-Slot ShareCradle Mounting Bracket	<ul style="list-style-type: none"> ► Allows for rack and wall mounting of one 5-Slot ShareCradle OR up to two 2-Slot Cradles or 4-Slot Battery Chargers. ► Bracket can be mounted on standard 19" network rack or on a wall. ► Provides cable routing slots and removable power supply tray that stores and conceals power supplies. ► Adjustable tabs & screw mounts for easy hanging/installation. ► Adjustable orientations: <ul style="list-style-type: none"> - 25° High Density (5-Slot Charge Only Cradle) - Horizontal (5-Slot Ethernet Cradle, Single Slot Cradles, and 4-Slot Battery Chargers). ► See the Bluetooth-Generic Accessories TAG for info on 3rd party Network Racks that can be used for mounting this bracket. 	
ADP-TC7X-PLT-FX		5-Slot ShareCradle Mounting Bracket Adapter Plate for Honeywell	<ul style="list-style-type: none"> ► Allows Zebra Multi-Slot ShareCradles to be mounted on legacy Honeywell Flex Cradle Wall Mount Brackets (HON SKU #203-641-002). ► Includes hardware to attach plate to HON wall bracket and secure ShareCradle to plate. ► NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item. 	
Battery Charging				
Part Number	Picture	Description	Notes	Required Items
SAC-TC7X-4BTYP-01		4-Slot Battery Charger (for all TC7X series)	<ul style="list-style-type: none"> ► Supports charging of all TC7X series Standard Capacity spare battery types (Power Precision+ and non-Power Precision+). ► Blue dot/label on charger distinguishes from TC70/TC75-only charger (SAC-TC7X-4BTYC1-01). ► Charges up to four spare batteries only ► Can be used standalone or one charger can be installed on the 5-Slot ShareCradle to allow four TC7X units and four spare batteries to be charged simultaneously. Charger will pull power from 5-Slot ShareCradle. ► Units manufactured after Q2 2023 will include a USB-C port which enables firmware updates on the charger. No other USB functions are supported. 	<p>For Standalone use:</p> <ul style="list-style-type: none"> ► Power Supply (PWR-BGA12V50W0VV and CBL-DC-388A1-01) ► AC Line Cord (23844-00-00R or country specific version) <p>For 5-Slot ShareCradle mounting:</p> <ul style="list-style-type: none"> ► 5-Slot Charge-Only ShareCradle (CRD-TC7X-SE5C1-01) and ShareCradle 4-Slot Battery Charger Adapter Cup (CUP-SE-BTYADP1-01) OR 5-Slot Charge-Only ShareCradle with Spare Battery Charging slot (CRD-TC7X-SE5KT1-01)


<p>SAC70-WM or KTSAC-TC7X-4BTYPP-01 or KT-TC7X-4BTYPP-USPS (includes US AC Line Cord, 23844-00-00R)</p> <p>SAC-TC7X-CLS-4BTYK (includes Australia AC Line Cord, 50-16000-217R)</p>		<p>4-Slot Battery Charger Kit with AC Line Cord (for all TC7X series)</p>	<ul style="list-style-type: none"> ► Supports charging of all TC7X series Standard Capacity spare battery types (Power Precision+ and non-Power Precision+). ► Blue dot/label on charger distinguishes from TC70/TC75-only charger (SAC-TC7X-4BTYC1-01). ► Charges up to four spare batteries only ► Can be used standalone or one charger can be installed on the 5-Slot ShareCradle to allow four TC7X units and four spare batteries to be charged simultaneously. Charger will pull power from 5-Slot ShareCradle. ► Units manufactured after Q2 2023 will include a USB-C port which enables firmware updates on the charger. No other USB functions are supported. ► Kit includes 4-Slot Battery Charger (SAC-TC7X-4BTYPP-01), Power Supply (PWR-BGA12V50W0WW, CBL-DC-388A1-01) and AC Line Cord (varies by SKU). ► NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item. 	
<p>SAC70-WM-INTL</p>		<p>4-Slot Battery Charger Kit (for all TC7X series)</p>	<ul style="list-style-type: none"> ► Supports charging of all TC7X series Standard Capacity spare battery types (Power Precision+ and non-Power Precision+). ► Blue dot/label on charger distinguishes from TC70/TC75-only charger (SAC-TC7X-4BTYC1-01). ► Charges up to four spare batteries only ► Can be used standalone or one charger can be installed on the 5-Slot ShareCradle to allow four TC7X units and four spare batteries to be charged simultaneously. Charger will pull power from 5-Slot ShareCradle. ► Units manufactured after Q2 2023 will include a USB-C port which enables firmware updates on the charger. No other USB functions are supported. ► Kit includes 4-Slot Battery Charger (SAC-TC7X-4BTYPP-01), Power Supply (PWR-BGA12V50W0WW and CBL-DC-388A1-01). ► NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item. 	<p>► AC Line Cord (23844-00-00R or country specific version)</p>

CRD-TC7X-20S4BC-01		20-Slot Spare Battery Charger	<ul style="list-style-type: none"> ► Supports charging of all TC7X series Standard Capacity spare battery types (Power Precision+ and non-Power Precision+). ► Blue dot/label on charger distinguishes from TC70/TC75-only charger (SAC-TC7X-4BTYC1-01). ► Uses 5-Slot ShareCradle with five TC7X 4-Slot Battery Chargers attached. ► Does NOT support fast-charging of batteries. Batteries will charge from 0-90% in about 5.5 hours. ► Can be racked/mounted in a standard 19 inch rack system via the mounting accessory (BRKT-SCRD-SMRK-01). ► NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item. 	<ul style="list-style-type: none"> ► Power Supply (PWR-BGA12V108W0WW) ► DC Line Cord (CBL-DC-382A1-01) ► AC Line Cord (23844-00-00F or country specific version)
CUP-SE-BTYADP1-01		4-Slot Battery Charger Adapter Cup	<ul style="list-style-type: none"> ► Allows for a TC7X 4-Slot Battery Charger (SAC-TC7X-4BTYPP-01 or SAC-TC7X-4BTYC1-01) to be charged and docked on the 5-Slot ShareCradles. ► Adapter Cup will pull power from 5-Slot ShareCradle and has pigtail cable to power 4-Slot Battery Charger. ► NOTE: Only one TC7X 4-Slot Battery Charger (SAC-TC7X-4BTYPP-01 or SAC-TC7X-4BTYC1-01) can be installed on the 5-Slot ShareCradle. Charger is installed on left most slot on ShareCradle. 	
Direct to Device Charging				
Part Number	Picture	Description	Notes	Required Items
CHG-TC7X-CLA1-02		Charging Cable Cup with Cigarette Lighter Adapter	<ul style="list-style-type: none"> ► Provides a smaller footprint for charging TC7X in the vehicle via a cigarette light adapter. ► Connects to charge contacts on bottom of TC7X. ► Can be used at same time as Snap-on accessories, including Trigger Handle. ► Coiled portion of cable has improved flexibility vs. CHG-TC7X-CLA1-01. 	
CHG-TC7X-CBL1-01		Charging Cable Cup	<ul style="list-style-type: none"> ► Provides a smaller footprint for charging TC7X ► Connects to charge contacts on bottom of TC7X. ► Can be used at same time as Snap-on accessories, including Trigger Handle. 	Power Supply (PWR-BUA5V16W0WW), DC Line Cord (CBL-DC-383A1-01) and AC Line Cord (50-16000-182R) for charging OR Vehicle Charger Cable for Vehicle Cradles/Snap-on Cables and ZQ500/ZQ600 Series Printers (VAM-MPP-VHCH1-01)



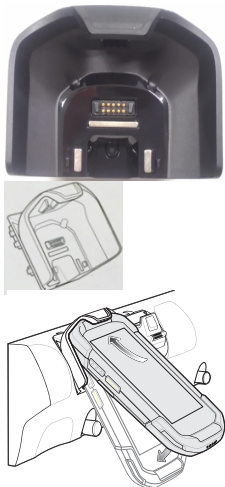

KT-FEG-CLA-01	 <p>Tip Screw Nut</p> <p>Spring 250 VAC, 4 A, Glass, Fast Blow Fuse</p>	Fuse Replacement Kit for Charging Cable Cup with Cigarette Lighter Adapter	<p>► Kit includes replacement fuse and components for Cigarette Lighter Adapter (CLA) cable charging cup (CHG-TC7X-CLA1-02)</p> <p>► Typically ordered if some of the CLA components are lost during fuse replacement.</p> <p>► NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item.</p>	
---------------	--	--	--	--




MC95 Style Cradles - these cradles are typically used by customers with a mixed install base of MC95 and TC7X devices

Part Number	Picture	Description	Notes	Required Items
ADP-TC7X-REU95-01		MC95 4-Slot Cradle to TC7X Adapter (pack of 8)	<p>► Allows TC7X to use existing MC95 4-Slot cradles (4-Slot Charge Only or 4-Slot Charge/Ethernet)</p> <p>► Existing MC95 cup/cleat on the cradle must be removed and replaced with Adapter.</p> <p>► TC70 Windows 10 units only capable of charging via 4-Slot Cradles. All other TC7X configurations capable of supporting both Charging and Ethernet communication.</p> <p>► Allows existing MC95 customers to reuse their installed base of MC95 cradles.</p> <p>► NOTE: SKU is restricted sale. Contact Zebra Product Management with opportunity information to ensure proper training on cradle modification has been met prior to authorizing sale.</p>	
CRD-TC7X-RECO95-01		MC95 Base - 4-Slot Charge Only Cradle	<p>► Uses MC95 4-Slot Charge-Only Cradle base along with four TC7X Adapters (ADP-TC7X-REU95-01).</p> <p>► Charges 4 terminals</p> <p>► Does <u>not</u> charge spare batteries.</p>	<p>For Desk Mounting: KT-116363-01R</p> <p>For Wall Mounting: KT-116362-01R</p> <p>► DC Line Cord (CBL-DC-382A1-01) and Power Supply (PWR-BGA12V108W0WW)</p> <p>► AC Line Cord (23844-00-00R or country specific version)</p>
CRD-TC7X-REEU95-01		MC95 Base - 4-Slot Ethernet and Charge Cradle	<p>► Uses MC95 4-Slot Ethernet Charge Cradle base along with four TC7X Adapters (ADP-TC7X-REU95-01).</p> <p>► Allows Ethernet speeds up to 1 Gb</p> <p>► Charges 4 terminals</p> <p>► Does not charge spare batteries.</p> <p>► TC70 Windows 10 units only capable of charging via 4-Slot Cradles. All other TC7X configurations capable of supporting both Charging and Ethernet communication.</p>	<p>For Desk Mounting: KT-116363-01R</p> <p>For Wall Mounting: KT-116362-01R</p> <p>► DC Line Cord (CBL-DC-382A1-01) and Power Supply (PWR-BGA12V108W0WW)</p> <p>► AC Line Cord (23844-00-00R or country specific version)</p>

CRDTC7X-F800ER		MC95 Base - 8-Slot Ethernet and Charge Cradle with Stand	<ul style="list-style-type: none"> ► Uses two MC95 4-Slot Ethernet Charge Cradle bases along with eight TC7X Adapters (ADP-TC7X-REU95-01). ► Cradles are mounted on metal brackets which can sit on a flat surface or can also be mounted to a wall. ► Allows Ethernet speeds up to 1 Gb. ► Charges 4 terminals ► Does not charge spare batteries. ► TC70 Windows 10 units only capable of charging via 4-Slot Cradles. All other TC7X configurations capable of supporting both Charging and Ethernet communication. ► NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this cradle. 	<ul style="list-style-type: none"> ► Two DC Line Cords (CBL-DC-382A1-01) and Power Supplies (PWR-BGA12V108W0WW) ► Two AC Line Cords (23844-00-00R or country specific version)
----------------	---	--	---	--

Communication Cables

Part Number	Picture	Description	Notes	Required Items
25-124330-01R		USB 2-Slot ShareCradle to PC/Host cable	<ul style="list-style-type: none"> ► Micro USB connection on cradle end ► Cable length is 48 inches 	
CBL-TC7X-USB1-01		Snap-on USB Communication/Charging Cable	<ul style="list-style-type: none"> ► Attaches to rear accessory port on TC7X ► Can't be used at same time as other Snap-on accessories ► Rev C and higher (Q2 2016) and higher no longer block view of rear facing camera. 	Power Supply (PWR-BUA5V16W0WW), DC Line Cord (CBL-DC-383A1-01) and AC Line Cord (50-16000-182R) for charging OR Vehicle Charger Cable for Vehicle Cradles/Snap-on Cables and ZQ500/ZQ600 Series Printers (VAM-MPP-VHCH1-01)
USB-TC7X-KIT		Snap-on USB Communication/Charging Cable Kit	<ul style="list-style-type: none"> ► Attaches to rear accessory port on TC7X ► Can't be used at same time as other Snap-on accessories ► Rev C and higher (Q2 2016) versions of cable no longer block view of rear facing camera. ► Kit includes Snap-on USB Communication/Charging Cable (CBL-TC7X-USB1-01), Power Supply (PWR-BUA5V16W0WW), DC Line Cord (CBL-DC-383A1-01) and AC Line Cord (50-16000-182R). ► NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this cable. 	
CBL-TC7X-DEX1-01		Snap-on DEX Cable	<ul style="list-style-type: none"> ► Attaches to rear accessory port on TC7X ► Can't be used at same time as other Snap-on accessories ► Does not provide device charging. ► Rev C and higher versions of cable no longer block view of rear facing camera. 	


CBL-TC7X-USB1-02		Snap-on ZQ6/QLn Series Printer Cable	<ul style="list-style-type: none"> ► Connects via USB connection to printer. ► Uses twist-lock on printer connector. ► 6 ft. straight cable ► Attaches to rear accessory port on TC7X ► Can't be used at same time as other Snap-on accessories ► Does not block view of rear facing camera. <p>► NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this cable.</p>	
CBL-TC7X-USBHD-01		Snap-on USB-C Adapter Cable	<ul style="list-style-type: none"> ► Connects to TC7X series to accessories with USB-C cable. ► Typically used with production version of HD4000 Heads Up Display (HUD). ► Cable length is 80cm/approx 32". ► Does not block view of rear facing camera. ► Includes 2 alligator clips for attaching cable to clothing. ► See the HD4000 Technical Accessory Guide (TAG) for additional details. 	
3rd party *		USB micro-A to USB A Female adapter	<ul style="list-style-type: none"> ► Allows the TC7X to act as a USB host to connect to devices like USB flash drives/memory sticks, mice, etc. ► Connects to 2-Slot USB ShareCradle 	
Snap-On Accessories				
Part Number	Picture	Description	Notes	Required Items



<p>TRG-TC7X-SNP1-02</p>		<p>Trigger Handle</p>	<ul style="list-style-type: none"> ▶ Transforms device into all-touch handle style terminal for use in high volume scanning operations ▶ 6.4 oz weight with spring back trigger designed for repetitive scanning. ▶ Trigger pull will awake device. ▶ Trigger can be easily removed for battery access. ▶ Compatible with Holster for Trigger Handle devices, Charge-Only Cradles, and Charging Cable Cups. ▶ Integrated three point stand allows device to be rested when not in use. ▶ NOT compatible with Hand Strap, other snap on accessories or USB/Ethernet cradles. ▶ NOTE: Even when Handle is removed from TC7X, the cleat may interfere with the device fitting into USB/Ethernet cradles. The cleat may need to be removed when using these cradles. Alternatively, ADP-TC7X-CLPTH1-20 can be used instead of standard tethered cleat. This alternative cleat will not interfere with cradle access. ▶ Includes trigger handle clip/cleat that replaces the TC7X's existing hand strap clip. ▶ Now includes tether strap to prevent Trigger Handle and Cleat from being separated - see ADP-TC7X-CLH1-10 for details. ▶ Now provides additional spring tension on Trigger Handle to TC7X connection points. ▶ Can be used with Wrist Strap (50-12500-066), although included tether strap can also be used for this. ▶ Blocks view of rear facing camera 	
<p>23-7X-09-TG-01 (3rd party) *</p> <p>Order through ScanSource in NA or through POSPOS in APAC.</p> <p>http://www.tis-gmbh.de/en/</p>		<p>Trigger Handle</p>	<ul style="list-style-type: none"> ▶ Simple compact trigger handle. Trigger handle mechanically presses the scan trigger button on the TC70 or the PTT button on the TC75/TC70x/TC75x when the trigger handle is pulled (PTT button requires re-mapping to perform scan). ▶ TC7X snaps into place on the Handle ▶ Gun form factor allows ergonomically optimized scanning position. ▶ Designed to provide comfortable balance in the hands of the user. ▶ TC7X can be recharged in Single or Multi-Slot cradles with the trigger handle installed. ▶ Does not block access to camera on back of TC7X. ▶ Includes stylus holder and tether point for stylus tether. ▶ TC7X Handstrap does not need to be removed to use with Handle. ▶ Handle must be removed to swap battery on device. ▶ Trigger mechanism was designed for over 1 million pulls. 	
<p>ADP-TC7X-AUD35-01</p>		<p>Snap-on Audio Adapter (3.5mm jack)</p>	<ul style="list-style-type: none"> ▶ Provides 3.5mm barrel jack connector ▶ Audio jack is at the end of a 3.5" pigtail cable extending from the rear of the adapter. ▶ Features Internal sealing and Rubber sealing to reduce connector corrosion and jack exposure. Ability to attach without removing hand strap and no need to detach to access the battery. Camera, Flash and IRDA window exposed. ▶ NOT compatible with other snap on accessories or USB/Ethernet cradles ▶ Allows access to rear facing camera. 	

KIT-TC7X-AUDL35-01		Snap-on Audio Adapter (3.5mm jack) with Retention and Anti-Rotation Lock/Clip	<ul style="list-style-type: none"> ► Provides 3.5mm barrel jack connector that is keyed/collared for a locking failsafe connection with matching cables and headsets. ► Audio jack is at the end of a 3.5" pigtail cable extending from the rear of the adapter. ► Features Internal sealing and Rubber sealing to reduce connector corrosion and jack exposure. Ability to attach without removing hand strap and no need to detach to access the battery. Camera, Flash and IRDA window exposed. ► NOT compatible with other snap on accessories or USB/Ethernet cradles ► Allows access to rear facing camera. ► Includes Snap-on 3.5mm Audio Adapter (ADP-TC7X-AUD35-01) and Retention/Anti-Rotation Lock (ADP-LOCK-3.5HT1-01) 	
ADP-RFD90-TC7X-1E (e-Connex sled for direct wired connection from TC7X to RFD90) ADP-RFD90-TC7X-1R (sled for Bluetooth connection from TC7X to RFD90) See RFD90 Accessories Document for additional info		RFD90 UHF RFID Sled for TC7X	<ul style="list-style-type: none"> ► Adapter allows TC7X to be mounted on top of RFD90. ► TC7X adapter attaches to top of RFD90 unit. ► Adapter also allows both the RFD90 and the TC device to be docked as a pair in RFD90 series Single or Multi-Slot ShareCradles. Not compatible with TC7X cradles shown above in this document - see RFD90 TAG for cradles. ► Not compatible with devices using custom Extended Capacity battery. 	
3PTY-RFID-TC7X		Snap-on RFID Reader	<ul style="list-style-type: none"> ► Supports reading of HF (ISO 15693, ISO 14443A and LEGIC compatible transponders) as well as UHF (ISO 18000-6C and EPC C1 G2) tags. ► Only certified for use in EMEA countries. ► Compatible with Hand strap, Holster, Charge-Only Cradles, and Charging Cable Cups. ► NOT compatible with other snap on accessories or USB/Ethernet cradles ► Allows access to rear facing camera ► May require additional drivers or custom OS build to be installed on TC7X. ► NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item. 	


<p>SINBON-TC7X-CAC</p>		<p>Snap-on CAC Reader</p>	<ul style="list-style-type: none"> ► Reads CAC cards for user authentication. ► Contact style reader requires user to insert card into slot on side of Snap-on. ► Snap-on provides pass-through connector allowing Trigger Handle (TRG-TC7X-SNP1-02) to be attached. ► Includes two cleats which secures CAC Reader to TC7X when using stand-alone or with both CAC Reader and Trigger Handle attached. ► May require additional drivers to be installed on TC7X. ► TC7X can be inserted into Charge-Only Cradles with Snap-on attached. Other cradles will require the Snap-on to be removed. ► NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item. 	
<p>TRD-TC7X-SNP1-01</p>		<p>Snap-on Tire Tread Depth Reader</p>	<ul style="list-style-type: none"> ► Used in auto and tire servicing operations to quickly determine tire tread depth. ► May require additional drivers to be installed on TC7X. ► TC7X can be inserted into Charge-Only Cradles with Snap-on attached. Other cradles will require the Snap-on to be removed. ► Blocks view of rear facing camera. 	
<p>23-7X-09-TSO-01 (for Agilion)</p> <p>23-7X-09-TSO-02 (for Solcon)</p> <p>23-7X-09-TSO-03 (for Ubisense)</p> <p>(3rd party) *</p> <p>http://tis-gmbh.de/en</p>		<p>TIS snap-on RTLS Transponder</p>	<ul style="list-style-type: none"> ► Provides Real-Time Location System (RTLS) tracking of the TC7X from various RTLS application providers. ► Transponder is powered from the TC7X ► Does not block access to camera. ► TC7X can still be docked in Charge-Only cradles and will also work with TIS Snap-on Trigger Handle (23-7X-09-TG-01) ► LED on snap-on indicates transponder is being powered. 	

Soft Goods - Cases/Holsters









Part Number	Picture	Description	Notes	Required Items
SG-TC7X-RHLSTR1-02		Rigid Holster	<ul style="list-style-type: none"> ▶ TC7X Rigid Holster w/ snap in Design to accommodate hand strap and Snap-ons (e.g. MSR) for easy insertion/removal ▶ Rotating Belt Clip with ability to insert in either direction. ▶ NOT compatible with Trigger Handle 	
SG-TC7X-RHLSTR1-01		Rigid Holster for TC70/TC75 series	<ul style="list-style-type: none"> ▶ TC7X Rigid Holster w/ snap in Design to accommodate hand strap and Snap-ons (e.g. MSR) for easy insertion/removal ▶ Rotating Belt Clip with ability to insert in either direction. ▶ NOT compatible with Trigger Handle ▶ Not recommended for use with TC72 or TC77 due to potential conflict with device's volume buttons. Use SG-TC7X-RHLSTR1-02 instead. 	
SG-TC7X-HLSTR1-02		Soft Holster	<ul style="list-style-type: none"> ▶ Vertical orientation with Open Bucket design to accommodate hand strap and Snap-ons such as the MSR for easy insertion and removal. ▶ Includes Loop and tether point for optional stylus. ▶ Non rotating for maximum durability. ▶ Opening at bottom of holster for providing drainage and route for audio from device's speaker. ▶ Uses improved materials vs. SG-TC7X-HLSTR1-01 	
SG-TC7X-HLSTR2-01		Soft Holster, Drop-in style 	<ul style="list-style-type: none"> ▶ Includes adjustable belt loop designed to be attached to belt. ▶ TC7X inserts into holster with screen facing user's leg. ▶ NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item. 	
SG-TC7X-HLSBELT-WM		Belt Mount Holster	<ul style="list-style-type: none"> ▶ NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item. 	

<p>AK4189DW (3rd party) *</p> <p>http://www.ultimacase.com</p>		<p>Ultima Case Sling/Waistbelt Holster</p>	<ul style="list-style-type: none"> ► Durable, easy-care Ballistic Nylon exterior. ► Buckle swivels to conform to body movements. ► Unique strap design allows holster to be carried either on shoulder or waist. ► Ratcheting system allows different angle to hold device for user's comfort. ► Bottom vent for quick insertion of device. 	
<p>TM-CTC70 (3rd party) *</p> <p>http://www.taylormadecases.com</p>		<p>TC7X Case</p>	<ul style="list-style-type: none"> ► Includes D ring and hand strap ► Provides access to camera 	
<p>AC1755DWSP (3rd party) *</p> <p>http://www.ultimacase.com</p>		<p>Holster for TC7X with Snap-On Trigger Handle</p> 	<ul style="list-style-type: none"> ► Holsters TC70 units using Trigger Handle (TRG-TC7X-SNP1-01) ► Made with durable easy care Ballistic nylon ► Belt loop designed for left or right handed users ► Exterior pocket holds spare battery ► Drain hole in case of inclement weather 	
<p>AF2598DW (3rd party) *</p> <p>http://www.ultimacase.com</p>		<p>Ultima Case OP Case with D-rings</p>	<ul style="list-style-type: none"> ► Leather-like exterior is rich in appearance and cleans easily. ► DirectTouch OP Case allows input with a tactile feel on the screen. ► 3 D-rings allow for optional shoulder strap or retractor attachment. ► Soft inside lining for added protection 	



<p>TM-CTC70G (3rd party) *</p> <p>http://www.taylormadecases.com</p>		<p>Case for TC7X with Trigger Handle</p>	<ul style="list-style-type: none"> ► Full access to touch screen ► Includes D ring 	
<p>TM-HUTC70 (3rd party) *</p> <p>http://www.taylormadecases.com</p>		<p>Holster for TC7X with Trigger Handle</p>	<ul style="list-style-type: none"> ► Includes slide clip on back and small front elastic pocket. 	
<p>AE2452DW (3rd party) *</p> <p>http://www.ultimacase.com</p>		<p>Ultima Case Wrist Mount Holster</p>	<ul style="list-style-type: none"> ► Leather-like exterior cleans easily. ► DirectTouch OP Case allows input with a tactile feel on the screen. ► Ergonomic, comfortable WristMount design. ► Wrist Mount has adjustable smooth slim straps which ensures a snug fit. ► Allows landscape or portrait orientation of the device. ► Perfect for fast-paced environments that require hands to be free! 	
<p>TM-WS-TC70 (3rd party) *</p> <p>http://www.taylormadecases.com</p>		<p>Wrist Mount Holster</p>	<ul style="list-style-type: none"> ► Allows TC7X to be worn as a wearable device. ► Full access to touch screen 	






<p>A1234ST (3rd party) *</p> <p>https://shilpitrading.com</p>		<p>Soft Wearable Holster</p>	<ul style="list-style-type: none"> ▶ Durable Ballistic Nylon Holster. ▶ Elastic side panels expand to accomodate varying device types and battery sizes. ▶ Compatible with MC55, MC6x, MC7x, and TC7X. ▶ Covered Belt Clip for quick on/off waist belt. ▶ Retaining strap at top to secure device in holster. ▶ Includes D-rings for optional shoulder strap use. ▶ Elastic loop on each side can be used for storing stylus. ▶ Can be used with optional Waist Belt for Holster (A1227ST) or Shoulder Strap (A1236ST) 	
<p>A1217ST (3rd party) *</p> <p>https://shilpitrading.com</p>		<p>Soft Wearable Holster with Shoulder Strap</p>	<ul style="list-style-type: none"> ▶ Leather-like material with smooth finish. ▶ Elastic side panels expand to accomodate varying device types and battery sizes. ▶ Compatible with MC55, MC6x, MC7x, and TC7. ▶ Covered Belt Clip for quick on/off waist belt. ▶ Retaining strap at top to secure device in holster. ▶ Includes D-rings for use with included shoulder strap. ▶ Shoulder Strap is 3/8" wide and adjustable to 70" length. ▶ Elastic loop on each side can be used for storing stylus. ▶ Can be used with optional Waist Belt for Holster (A1227ST). 	

<p>A1216ST (3rd party) *</p> <p>https://shilpitrading.com</p>		<p>Soft Wearable Dual Holster with Shoulder Strap</p>	<ul style="list-style-type: none"> ▶ Leather-like material with smooth finish. ▶ Includes two pockets - one for device and another for cell phone, mobile payment unit or spare battery. ▶ Elastic side panels expand to accomodate varying device types and battery sizes. ▶ Compatible with MC55, MC6x, MC7x, and TC7X. ▶ Covered Belt Clip for quick on/off waist belt. ▶ Retaining strap at top to secure device in holster. ▶ Includes D-rings for use with included shoulder strap. ▶ Shoulder Strap is 3/8" wide and adjustable to 70" length. ▶ Elastic loop on each side can be used for storing stylus. ▶ Can be used with optional Waist Belt for Holster (A1227ST). 	
<p>SG-TC7X-HSTR2-03 (pack of 3)</p>		<p>Replacement Handstraps</p>	<ul style="list-style-type: none"> ▶ Leather and Hypalon Pad for maximum comfort & wear resistance ▶ Adjustable Velcro design provides comfort to support a wide range of hand sizes while resisting wear in rugged environments. ▶ Also provides a loop and tether point for the optional stylus. ▶ Plastic Clip latches into terminal for easy insertion and removal. ▶ Has improved handstrap materials vs. SG-TC7X-HSTRP1-03 	
<p>SG-TC7X-CUSTRP2-01 (single)</p> <p>SG-TC7X-CUSTRP2-03 (pack of 3)</p>		<p>Extended Length Handstrap</p>	<p>▶ NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item.</p>	

SG-MC33-LNYDB-01	 	<p>Lanyard</p> 	<ul style="list-style-type: none"> ► Allows unit to be attached to a retractable lanyard. ► Lanyard can be worn cross-body using included strap or strap can be removed and lanyard can be attached to belt. ► Standard TC7X handstrap must be removed to allow lanyard to be attached. ► Not compatible with TC7X Trigger Handle. ► For safety, includes multiple break-away points triggered by a force of < 19 kgf (42lbf). ► Can be used with Belt Holster (11-08062-02R) 	
SG-MC33-LNYBK-01		Replacement Buckle for Lanyard	<ul style="list-style-type: none"> ► Replacement buckle used on the Lanyard (SG-MC33-LNYDB-01) 	
11-08062-02R		Belt for holster	<ul style="list-style-type: none"> ► Belt is 2 inches wide ► Extends to 48 inches ► Has improved buckle and softer belt material 	
A1227ST (3rd party) * https://www.shilpitrading.com		Belt for Holster	<ul style="list-style-type: none"> ► Belt is 2 inches wide ► Extends to 48 inches ► Quick on/off snap buckle 	
V6198DW (3rd party) * http://www.ultimacase.com		Belt Extender	<ul style="list-style-type: none"> ► Used to extend the holster belt (11-08062-02R) an additional 10 inches 	

50-12500-066		Wrist Strap for Trigger Handle	► Attaches to bottom of Trigger Handle (TRG-TC7X-SNP1-03)	
Vehicle Cradles and Holders				
Powered Cradles and Holders (provides device charging and/or communication)				
Part Number	Picture	Description	Notes	Required Items
CRD-TC7X-VCD1-01		Vehicle Data Communication and Charge Cradle Kit with USB I/O Hub	<ul style="list-style-type: none"> ► Includes TC7X Vehicle Data Communication Device Holder/Cradle (CRD-TC7X-DCVH-01) and USB I/O Hub (SHARE-USBH-01) ► 15 pin connector connects Holder/Cradle to USB I/O Hub ► USB I/O Hub includes the following ports: <ul style="list-style-type: none"> - 3 standard USB A size ports - each can provide 1.5A current. - 1 USB A Charge-Only port - can provide 1.5A current for charging cell phones, tablets, headsets, etc. - 3.5mm headset jack ► TC7X is automatically placed in USB Host mode ► Accepts 12/24V power from vehicle and provides power conditioning (SAE/ISO) to TC7X ► Does NOT support snap on accessories. ► Supports Handstrap + Stylus. ► Cradle must be powered externally for USB ports to be functional. 	<p>For Charging: Cigarette Lighter Auto Charge Cable (CHG-AUTO-CLA1-01) OR Hard Wired Auto Charge Cable (CHG-AUTO-HWIRE1-01) OR Vehicle Charger Cable for Vehicle Cradles/Snap-on Cables and ZQ500/ZQ600 Series Printers (VAM-MPP-VHCH1-01) OR Legacy Zebra Vehicle Cradle Adapter Cable (CBL-TC7X-GFS-01) OR Lind (Gamber-Johnson) Isolated Power Supply when installed on higher voltage vehicles</p> <p>For Mounting Cradle: Windshield Suction Mount (RAM-B-166U) OR Vehicle Cradle RAM mount ball (RAM-B-238U) and additional RAM mount hardware</p> <p>For Mounting I/O Hub: Mount on flat surface OR Vehicle Cradle RAM mount ball (RAM-B-238U) and additional RAM mount hardware</p>
CRD-TC7X-DCVH-01		Vehicle Data Communication Device Holder/Cradle	<ul style="list-style-type: none"> ► Does NOT support snap on accessories. ► Supports Handstrap + Stylus. ► 15 pin connector on cable is used to attach to USB I/O Hub (SHARE-USBH-01) 	<p>USB I/O Hub (SHARE-USBH-01)</p> <p>For Mounting: Windshield Suction Mount (RAM-B-166U) OR Vehicle Cradle RAM mount ball (RAM-B-238U) and additional RAM mount hardware</p>

SHARE-USBH-01		USB I/O Hub for Vehicle Data Communication Cradle		<p>Vehicle Data Communication Device Holder/Cradle (CRD-TC7X-DCVH-01)</p> <p>For Charging: Cigarette Lighter Auto Charge Cable (CHG-AUTO-CLA1-01) OR Hard Wired Auto Charge Cable (CHG-AUTO-HWIRE1-01) OR Vehicle Charger Cable for Vehicle Cradles/Snap-on Cables and ZQ500/ZQ600 Series Printers (VAM-MPP-VHCH1-01) OR Legacy Zebra Vehicle Cradle Adapter Cable (CBL-TC7X-GFS-01) OR Lind (Gamber-Johnson) Isolated Power Supply when installed on higher voltage vehicles</p> <p>For Mounting: Mount on a flat surface OR Vehicle Cradle RAM mount ball (RAM-B-238U) and additional RAM mount hardware</p>
CRD-TC7X-CVCD1-01		Charge-Only Vehicle Cradle	<p>► Supports snap on TC7X accessories, excluding the Trigger Handle. ► Uses unique tabs on power cable connector to ensure reliable power connection. ► Includes removable mounting plate that provides for quick removal of the cradle using a single thumb screw on the top of the cradle.</p>	<p>For Charging: Cigarette Lighter Auto Charge Cable (CHG-AUTO-CLA1-01) OR Hard Wired Auto Charge Cable (CHG-AUTO-HWIRE1-01) OR Auto Charger Cable for Vehicle Cradles/Snap-on Cables and ZQ510/ZQ520 Series Printer (VAM-MPP-VHCH1-01) OR Legacy Zebra Vehicle Cradle Adapter Cable (CBL-TC7X-GFS-01) OR Lind (Gamber-Johnson) Isolated Power Supply when installed on higher voltage vehicles</p> <p>For Mounting: Windshield Suction Mount (RAM-B-166U) OR Vehicle Cradle RAM mount ball (RAM-B-238U) and additional RAM mount hardware</p>
KT-CRDVEHTC7-ADB		Charge-Only Vehicle Cradle KIT	<p>► Supports snap on TC7X accessories, excluding the Trigger Handle. ► Uses unique tabs on power cable connector to ensure reliable power connection. ► Includes removable mounting plate that provides for quick removal of the cradle using a single thumb screw on the top of the cradle. ► Kit includes Charge-Only Vehicle Cradle (CRD-TC7X-CVCD1-01) and Honeywell Legacy Vehicle Cradle Power Adapter Cable (ADPCBL-TC7X-USPS). ► NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item.</p>	





<p>KT-CRDTC7XVEH-01</p>		<p>Charge-Only Vehicle Cradle KIT</p>	<ul style="list-style-type: none"> ► Supports snap on TC7X accessories, excluding the Trigger Handle. ► Uses unique tabs on power cable connector to ensure reliable power connection. ► Includes removable mounting plate that provides for quick removal of the cradle using a single thumb screw on the top of the cradle. ► Kit includes Charge-Only Vehicle Cradle (CRD-TC7X-CVCD1-01), Hard Wired Auto Charge Cable (CHG-AUTO-HWIRE1-01), RAM Double Socket 3" Arm (MNT-RAM-B201U) and RAM Round Plate Base (MNT-RAM-B202U). ► NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item. 	
<p>CRD-TC7X-DACH-01</p>		<p>Charge-Only Vehicle Cradle</p>	<ul style="list-style-type: none"> ► Cradle with integrated cigarette lighter adapter securely holds the TC7X in vehicles. ► Supports 12/24V vehicle systems. ► Uses same cradle design as Vehicle Data Communication Device Holder/Cradle (CRD-TC7X-DCVH-01) ► Does NOT support snap on accessories. ► Supports Handstrap + Stylus. ► NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item. 	<p>For Mounting: Windshield Suction Mount (RAM-B-166U) OR Vehicle Cradle RAM mount ball (RAM-B-238U) and additional RAM mount hardware</p>
<p>3PTY-RAM-HOL-ZE7-2U</p> <p>NOTE: Products sold that do not bear the Zebra brand name are serviced and supported exclusively by their manufacturers in accordance with terms and conditions packaged with the products. Zebra's Limited Warranty does not apply to products that are not Zebra branded, even if packaged or sold with Zebra products. Please contact the manufacturer directly for technical support and customer service. See PMB 11136 for more info.</p>		<p>RAM Charge-Only Vehicle Cradle</p>	<ul style="list-style-type: none"> ► Spring-loaded cradle securely holds the TC7X in vehicles. ► Does NOT support snap on accessories. ► Supports Handstrap + Stylus. ► Uses RAM GDS 5.5mm barrel jack connector for connection to power source. Also includes barrel jack connector to USB-A cable for connection to power supply. ► Compatible with RAM two-hole AMPS pattern diamond bases that will connect to B and C size ball mounts, allowing for a wide variety of mounting options. 	<p>For Charging: RAM/GDS Modular Hardwire Charger (RAM-GDS-CHARGE-V7B1U), available from RAM</p> <p>For Mounting: Windshield Suction Mount (RAM-B-166U) OR Vehicle Cradle RAM mount ball (RAM-B-238U) and additional RAM mount hardware</p>
<p>3PTY-RAM-ZE7CLU</p>		<p>RAM Charge-Only Vehicle Cradle</p> 	<ul style="list-style-type: none"> ► Cradle with combination lock securely holds the TC7X in vehicles. ► Does NOT support snap on accessories. ► Supports Handstrap + Stylus. ► Uses RAM GDS 5.5mm barrel jack connector for connection to power source. Also includes barrel jack connector to USB-A cable for connection to power supply. ► Compatible with RAM two-hole AMPS pattern diamond bases that will connect to B and C size ball mounts, allowing for a wide variety of mounting options. ► NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item. 	<p>For Charging: RAM/GDS Modular Hardwire Charger (RAM-GDS-CHARGE-V7B1U)</p> <p>For Mounting: Windshield Suction Mount (RAM-B-166U) OR Vehicle Cradle RAM mount ball (RAM-B-238U) and additional RAM mount hardware</p>





<p>23-7X-09-TPC-010 (Charge-Only Cigarette Lighter Adapter plug)</p> <p>23-7X-09-TPC-020 (Charge-Only Hard-wired power connection)</p> <p>(3rd party) *</p> <p>http://tis-gmbh.de/en</p>		<p>TIS Charge-Only Vehicle Cradle</p>	<ul style="list-style-type: none"> ► Available in both hard-wired and cigarette light adapter cable configurations ► Durable cradle design for rugged enterprise use ► AMPS hole pattern for simple wall, pedestal or vehicle dashboard mounting ► Swivel mount ► Does not include pictured RAM brackets 	
<p>various SKUs</p> <p>(3rd party) *</p> <p>http://www.proclipusa.com/category/zebra</p>		<p>ProClip Vehicle Cradles</p>	<ul style="list-style-type: none"> ► Available in both powered and un-powered versions (cigarette lighter adapter or straight through power cable) ► Versions available with top support clip that holds the device in place for a secure fit. ► Versions available with USB interface for connecting to external devices. ► Does not work with snap-on accessories ► Cradle tilts and swivels ► Powered versions provide: <ul style="list-style-type: none"> - 10 Watts (2A) fast charging power - Hard wire to 12 / 24 V vehicle power sources - Black box converts from 12/24 V to 5.4 V output 	
<p>7160-1509-01 (Charge-Only)</p> <p>(3rd party) *</p> <p>http://www.gamberjohnson.com</p>		<p>Gamber-Johnson Vehicle Cradles</p>	<ul style="list-style-type: none"> ► Durable cradle design for rugged enterprise use ► Easy one-handed docking and releasing operation for ease of use ► Attaches to Gamber-Johnson mounting solutions using the AMPs hole pattern. 	<p>► For Charging: See Gamber-Johnson website for power options</p>





<p>PSVTC70-01 (Charge-Only Cigarette Lighter Adapter plug)</p> <p>PSVTC70-02 (Charge-Only Hard-wired power connection)</p> <p>(3rd party) *</p> <p>http://www.portsmith.com</p>		<p>PortSmith Charge-Only Vehicle Cradles</p>	<ul style="list-style-type: none"> ► Available in both hard-wired and cigarette light adapter cable configurations ► Durable cradle design for rugged enterprise use ► AMPS hole pattern for simple wall, pedestal or vehicle dashboard mounting ► Swivel mount ► Supports snap-on accessories, including Trigger Handle. 	
<p>RAM-HOL-ZE7U</p> <p>RAM-HOL-ZE7LU (includes key lock to secure device)</p> <p>RAM-HOL-ZE7CLU (includes combination lock to secure device)</p> <p>(3rd party) *</p> <p>https://www.rammount.com</p>		<p>RAM Charge-Only Vehicle Cradle</p> 	<ul style="list-style-type: none"> ► Spring-loaded cradle allows easy one handed insertion and removal. ► Uses RAM GDS 5.5mm barrel jack connector for connection to power source. ► Compatible with RAM two-hole AMPS pattern diamond bases that will connect to B and C size ball mounts, allowing for a wide variety of mounting options. 	<ul style="list-style-type: none"> ► For Charging: RAM Cigarette Charger (RAM-POW-CIG-M55) OR RAM/GDS Modular Hardwire Charger (RAM-GDS-CHARGE-V7-M55U) ► For Mounting: RAM 2-hole AMPS pattern diamond ball mount (RAM-B-166U, RAM-B-238U or see RAM website for other options).
Un-Powered Cradles and Holders (passive holders, no charging support)				
Part Number	Picture	Description	Notes	Required Items
3PTY-PCLIP-710832		<p>Forklift Cradle with 8" Post for Forklift Grill Mounting</p>	<ul style="list-style-type: none"> ► Features a unique and rugged design that not only secures and protects the TC7X, but enables the operator to quickly and easily adjust the cradle position for optimal device access. ► A pivoting device securement arm on top of the cradle holds the TC7X firmly into the cradle during operation. ► Four vibration-mitigating pads on the back of the cradle dramatically reduce shock to the device. The pedestal mount features quick-adjust joints with interlocking teeth for superior strength and device stability in spite of excessive shock and vibration. ► Does NOT support snap on accessories. ► Supports Handstrap + Stylus. ► Does NOT charge TC7X ► NOTE: TC7X fits into cradle with display facing away from driver (for driver safety). It will not allow TC7X to be inserted with display facing the driver. ► NOTE: Restricted Product - Must open CPR at http://cpr.zebra.lan (Zebra internal site). Sample devices shall then be provided, and once the customer approves these demo devices, the SKU shall be opened for sale to that customer. Refer to PMB 2756 for details. 	

<p>3PTY-PCLIP-710833</p>		<p>Forklift Cradle with 2" Post for Forklift Grill Mounting</p> 	<ul style="list-style-type: none"> ► Features a unique and rugged design that not only secures and protects the TC7X, but enables the operator to quickly and easily adjust the cradle position for optimal device access. ► A pivoting device securement arm on top of the cradle holds the TC7X firmly into the cradle during operation. ► Four vibration-mitigating pads on the back of the cradle dramatically reduce shock to the device. The pedestal mount features quick-adjust joints with interlocking teeth for superior strength and device stability in spite of excessive shock and vibration. ► Does NOT support snap on accessories. ► Supports Handstrap + Stylus. ► Does NOT charge TC7X ► NOTE: TC7X fits into cradle with display facing away from driver (for driver safety). It will not allow TC7X to be inserted with display facing the driver. ► NOTE: Restricted Product - Must open CPR at http://cpr.zebra.com (Zebra internal site). Sample devices shall then be provided, and once the customer approves these demo devices, the SKU shall be opened for sale to that customer. Refer to PMB 2756 for details. 	
<p>3PTY-PCLIP-241475</p>		<p>Heavy Duty Vehicle/Forklift Cradle with Vibration Damper</p>	<ul style="list-style-type: none"> ► Features a unique and rugged design that not only secures and protects the TC7X, but enables the operator to quickly and easily adjust the cradle position for optimal device access. ► A pivoting device securement arm on top of the cradle holds the TC7X firmly into the cradle during operation. ► Four vibration-mitigating pads on the back of the cradle dramatically reduce shock to the device. The pedestal mount features quick-adjust joints with interlocking teeth for superior strength and device stability in spite of excessive shock and vibration. ► Cradle uses AMPS hole pattern for attaching to brackets. ► Does NOT support snap on accessories. ► Supports Handstrap + Stylus. ► Does NOT charge TC7X ► NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item. 	
<p>various SKUs (3rd party) *</p> <p>http://www.proclipusa.com/category/zebra</p>		<p>ProClip Vehicle Cradles</p>	<ul style="list-style-type: none"> ► Available in both powered and un-powered versions (cigarette lighter adapter or straight through power cable) ► Versions available with top support clip that holds the device in place for a secure fit. ► Versions available with USB interface for connecting to external devices. ► Does not work with snap-on accessories ► Cradle tilts and swivels ► Powered versions provide: <ul style="list-style-type: none"> - 10 Watts (2A) fast charging power - Hard wire to 12 / 24 V vehicle power sources - Black box converts from 12/24 V to 5.4 V output 	


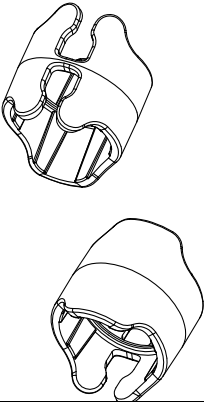


7160-1509 (3rd party) *		Gamber-Johnson Vehicle Holder	<ul style="list-style-type: none"> ► Durable cradle design for rugged enterprise use ► Easy one-handed docking and releasing operation for ease of use ► Attaches to Gamber-Johnson mounting solutions using the AMPs hole pattern 	
http://www.gamberjohnson.com				
Vehicle Mounting Hardware Refer to the Common Mounting Systems Technical Accessory Guide (TAG) for mounting options 				
Misc				
Part Number	Picture	Description	Notes	Required Items
ADP-TC7X-BLKPLT-20 (pack of 20)		Replacement Blank/Filler for Handstrap or Cleat	<ul style="list-style-type: none"> ► Replacement filler that is typically included with each TC7X device. These fillers are removed when using the hand strap or Trigger Handle. ► Attaches under battery. 	
ADP-TC7X-CLPTH1-20 (pack of 20)		Replacement Cleat for Trigger Handle	<ul style="list-style-type: none"> ► Attaches under battery and provides attachment point for the Trigger Handle (TRG-TC7X-SNP1-01). ► This cleat does not interfere with the use of Ethernet/USB cradles. ► Internal P/N for individual cleat is 42.18V37.001 	




<p>ADP-TC7X-CLH10-10 (pack of 10)</p>		<p>Replacement Cleat and Handstrap for Trigger Handle</p>	<ul style="list-style-type: none"> ▶ Attaches under battery and provides attachment point for the Trigger Handle (TRG-TC7X-SNP1-02) ▶ Includes Handstrap (tether strap) (see SG-TC7X-TRGHSTRP-03) to prevent Trigger Handle and Cleat from being separated. ▶ One Cleat and Handstrap is normally included with each Trigger Handle ▶ NOTE: Use of this cleat may interfere with the device fitting into USB/Ethernet cradles. The cleat may need to be removed when using these cradles. Alternatively, ADP-TC7X-CLPTH1-20 can be used instead of this cleat. 	
<p>SG-TC7X-TRGHSTRP-03</p>		<p>Replacement Handstrap/Tether for Trigger Handle (pack of 3)</p>	<ul style="list-style-type: none"> ▶ Used to tether Cleat (see ADP-TC7X-CLH10-10) to Trigger Handle (TRG-TC7X-SNP1-02). ▶ Prevents loss or misplacement of the Cleat. ▶ These are replacement straps. One strap is normally included with each Trigger Handle (TRG-TC7X-SNP1-02) or Replacement Cleat (ADP-TC7X-CLH10-10). 	
<p>SG-TC7X-STYLUS1-03 (pack of 3)</p> <p>SG-TC5X-STYLUS-50 (pack of 50)</p> <p>NOTE: 50-pack is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item.</p>		<p>Stylus</p>	<ul style="list-style-type: none"> ▶ Conductive Carbon-filled plastic material w/ 5mm tip. ▶ Length of stylus is 3.5". ▶ Rigid plastic stylus is optimized for enterprise durability. ▶ Clip & tether point to reduce loss. ▶ When not being used stylus can be stored in loop on Handstrap or in the optional Holster 	
<p>SG-TC7X-STYLUS-03 (pack of 3)</p> <p>SG-TC7X-STYLUS-06 (pack of 6)</p> <p>NOTE: 6-pack is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item.</p>		<p>Stylus Kit with Tether</p>	<ul style="list-style-type: none"> ▶ Includes fine-pitch, capacitive Stylus (SG-TC7X-STYLUS1-03) and coiled tether (KT-TC7X-TETHR1-03) ▶ Conductive Carbon-filled plastic material w/ 5mm tip. ▶ Length of stylus is 3.5". ▶ Rigid plastic stylus is optimized for enterprise durability. ▶ Clip & tether point to reduce loss. Tether to Handstrap ▶ When not being used stylus can be stored in loop on Handstrap or in the optional Holster 	

SG-STYLUS-TCX-MTL-03 (pack of 3)		Fiber Tipped Stylus	<ul style="list-style-type: none"> ► Black Passive Stylus with Zebra logo ► 5" length ► Heavy duty - made from stainless steel and brass. No plastic parts - real pen feel. ► Can be used in rain. ► Micro-Knit Hybrid Mesh Fiber Tip provides silent, smooth gliding use. ► Big improvement over rubber tipped or plastic tipped stylus. ► Compatible with all capacitive touch screen devices. ► Can be tethered to device using SG-TC5NGTC7NG-TETHR-03. 	
SG-TC5NGTC7NG-TETHR-03 (pack of 3)		Tether for Stylus	<ul style="list-style-type: none"> ► String type tether prevents loss of stylus ► NOTE: This tether is recommended when using Fiber Tipped Stylus (SG-STYLUS-TCX-MTL-03). Other tethers may not fit easily through the tether loop hole on the stylus. 	
KT-TC7X-TETHR1-03 (pack of 3)		Replacement Coiled Tether for Stylus	<ul style="list-style-type: none"> ► This tether is included with Stylus Kit with Tether (SG-TC7X-STYLUS-03) ► Not recommended when using Fiber Tipped Stylus (SG-STYLUS-TCX-MTL-03). 	
SG-ET5X-SLTETR-01 (single)		Replacement Coiled Tether for Stylus	<ul style="list-style-type: none"> ► This tether is typically used with the ET5X series' stylus. ► Not recommended when using Fiber Tipped Stylus (SG-STYLUS-TCX-MTL-03). 	







SG-TC7X-SCRNTMP-01 (single)		Tempered Glass Screen Protector	► Compatible with TC70x/TC72/TC75x/TC77 series only (not TC70/TC75 series)	
SG-TC7X-SCRNTMP-25 (pack of 25) <small>NOTE: 25-pack is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item.</small>				
Headset/Audio Accessories				
Wired Headsets and Audio Accessories <small>NOTE: Snap-On Audio adapter required when using wired headsets on all TC7X series devices - see Snap-On Accessories section above</small>				
Part Number	Picture	Description	Notes	Required Items
HDST-35MM-PTT1-02		PTT and VoIP Headset (3.5mm Standard jack)	<ul style="list-style-type: none"> ► For Push-To-Talk (PTT) and VoIP telephony ► Uses standard 3.5mm jack. ► Rotating earpiece allows for right or left ear configuration ► Built-in cord wrap ► mono with microphone ► includes clip for attaching PTT button to clothing. ► NOTE: Use of Locking connector headset (HDST-35MM-PTVP-02) is recommended. ► Improved resistance to cleaning and sanitizing products vs. HDST-35MM-PTT1-01 	► TC7X Snap-on Audio Adapter (3.5mm jack) (ADP-TC7X-AUD35-01)
3PTY-NO-EHL1W-01		PTT and VoIP Headset, over the ear (3.5mm Standard jack)	<ul style="list-style-type: none"> ► For Push-To-Talk (PTT) and VoIP telephony. ► Compatible with Zebra PTT Express and PTT Pro. ► Uses standard 3.5mm jack. ► Speaker fits over the ear vs. HDST-35MM-PTT1-02 ► Rotating earpiece allows for right or left ear configuration ► mono with microphone ► includes clip for attaching PTT button to clothing. 	
HDST-35MM-PTVP-02		PTT Headset (3.5mm Locking jack)	<ul style="list-style-type: none"> ► For Push-To-Talk (PTT) and VoIP telephony ► Uses 3.5mm rugged jack that is keyed/collared for a locking failsafe connection. ► Rotating earpiece allows for right or left ear configuration ► Built-in cord wrap ► mono with microphone ► includes clip for attaching PTT button to clothing. ► Improved resistance to cleaning and sanitizing products vs. HDST-35MM-PTVP-01 	► TC7X Snap-on Audio Adapter (3.5mm jack) with retention and anti-rotation lock (KIT-TC7X-AUDL35-01)






HDST-25MM-PTVP-02		PTT and VoIP Headset (2.5mm jack)	<ul style="list-style-type: none"> ► For Push-To-Talk (PTT) and VoIP telephony ► 2.5 mm jack ► Rotating earpiece allows for right or left ear configuration ► Built-in cord wrap ► mono with microphone ► includes clip for attaching PTT button to clothing. ► Recommend using 3.5mm headset (HDST-35MM-PTVP-01) instead since this feature a more secure locking jack connector. ► Improved resistance to cleaning and sanitizing products vs. HDST-25MM-PTVP-01 	► 2.5mm Female to 3.5mm Male Headset Adapter Cable (CBL-TC51-HDST25-01)
See HS2100-HS3100 Accessories Document		HS2100 Rugged Wired Headset	<ul style="list-style-type: none"> ► Built to handle the everyday inevitable drops ► Dustproof, sprayproof and waterproof ► Ready for the freezer and outdoor subzero temperatures ► Feather-light for extraordinary comfort ► Noise cancellation for a superior voice experience in the noisiest environments ► Detachable swivel boom minimizes costs. ► Swivelling boom mutes microphone allowing uses to prevent voice pick applications from recognizing non-voice pick conversations. ► User-replaceable pads and windscreens maximize comfort and hygiene 	<ul style="list-style-type: none"> ► HS2100 to 3.5mm Standard Cable (CBL-HS2100-3MS1-01) AND ► TC7X Snap-on Audio Adapter (3.5mm jack) with retention and anti-rotation lock (KIT-TC7X-AUDL35-01) <p>See HS2100/HS3100 Accessories Document for additional headset accessories</p>
VR12 (3rd party) * http://www.blueparrott.com		BlueParrott VR12 Wired Noise Cancelling Headset	<ul style="list-style-type: none"> ► Audio accuracy for voice picking and other speech recognition applications. ► High quality durability stands up to all-day, every-day use. ► Lightweight design is easy and comfortable to wear all day. ► Compatible with most major wearable computers and devices used in voice-picking environments. ► G type (GN Netcom) Quick Disconnect. ► Convertible design gives choice of over-the-head and behind-the-neck wearing styles 	<p><u>Option 1</u></p> <ul style="list-style-type: none"> ► TC7X Snap-on Audio Adapter (3.5mm jack) with retention and anti-rotation lock (KIT-TC7X-AUDL35-01) AND ► Quick Disconnect Headset Adapter Cable (ADP-35M-QDCBL1-01) <p><u>Option 2</u></p> <ul style="list-style-type: none"> ► 2.5mm Snap-on Audio Adapter (ADP-TC7X-AUDIO1-01) AND ► Quick Disconnect Adapter Cable (25-124387-02R)
CBL-HS2100-3MS1-01		HS2100 Headset Standard Cable (3.5 mm jack)	<ul style="list-style-type: none"> ► 3.5mm barrel jack connector ► For use with TC7X, TC8000, or other devices using a 3.5mm barrel jack audio connector ► Cable is 43" (1.1 M) long ► Rugged cable with rugged connectors that are keyed for failsafe connectivity ► Includes one clothing clip. Additional clips can be purchased separately. 	► TC7X Snap-on Audio Adapter (3.5mm jack) with retention and anti-rotation lock (KIT-TC7X-AUDL35-01)
25-124387-02R		RCH50/RCH51 Headset Adapter Cable	<ul style="list-style-type: none"> ► Connects RCH50/RCH51 headset to devices with standard 3-pole 2.5mm barrel jack connector. ► Updated cable minimizes cross talk and intermittency issues. 	► 2.5mm Snap-on Audio Adapter (ADP-TC7X-AUDIO1-01)


ADP-35M-QDCBL1-01		RCH50/RCH51 Quick Disconnect Headset Adapter Cable	<ul style="list-style-type: none"> ► Connects RCH50/RCH51 headset (or headsets with Quick-Disconnect connector) to devices with 3-pole 3.5mm barrel jack connector. ► Cable features a rugged keyed/collared jack for a locking failsafe connection. 	► TC7X Snap-on Audio Adapter (3.5mm jack) with retention and anti-rotation lock (KIT-TC7X-AUDL35-01)
ADP-LOCK-3.5HT1-01		3.5mm Audio Adapter Retention and Anti-Rotation Lock	<ul style="list-style-type: none"> ► This clip is used with the Snap-on 3.5mm Audio Adapter (ADP-TC7X-AUDL35-01) and keyed headset cables to prevent cable rotation/spinning and also to provide a secure, reliable headset connection. ► Clip is normally included with Snap-on 3.5mm Audio Adapter KIT (KIT-TC7X-AUDL35-01). ► NOTE: This is a Spare/Service Parts item. Order by contacting Zebra Support Center - see SMB 6233 for details. 	
Bluetooth Headsets and Audio Accessories NOTE: Bluetooth headsets with PTT function not supported by Zebra PTT Express application. Check Zebra WFC Central Client app Release Notes to verify compatibility.				
Part Number	Picture	Description	Notes	Required Items
See HS2100-HS3100 Accessories Document		HS3100 Rugged Bluetooth Headset for VDP applications	<ul style="list-style-type: none"> ► HD Voice, also known as Wide Band Audio, brings incredible audio clarity ► Built to handle the everyday inevitable drops ► Dustproof, sprayproof and waterproof ► Ready for the freezer and outdoor subzero temperatures ► Feather-light for extraordinary comfort ► Noise cancellation tuned for VDP (voice directed picking) applications. ► Not designed for the aggressive noise cancellation required for VoIP or voice calls. Headset's send level is not tuned to satisfy VoIP or voice standards and will result with audio being quieter at the far end and delivering more noise. ► Swap batteries on the fly — without losing the Bluetooth connection ► Split-second tap-to-pair simplicity using NFC. ► Detachable swivel boom minimizes costs. ► Swivelling boom mutes microphone allowing users to prevent voice pick applications from recognizing non-voice pick conversations. ► User-replaceable pads and windscreens maximize comfort and hygiene ► 15 hours of battery power 	See HS2100/HS3100 Accessories Document for headset accessories
various Bluetooth models B550-XT B350-XT C400-XT C300-XT (3rd party) * http://www.blueparrott.com		BlueParrott Bluetooth Headsets	<ul style="list-style-type: none"> ► Various Bluetooth models available with options that include: <ul style="list-style-type: none"> - Blocking out 96% of background noise - Over 24 hours of talk time - NFC Tap to Pair capable - Bluetooth wireless range capable up to 300 ft. - Convertible wearing options: over the head, behind the neck. See BlueParrot site for model specific options.	

<p>APTT1 or APTT2 (3rd party) *</p> <p>https://www.aina-wireless.com/</p>		<p>Aina Push-To-Talk (PTT) Bluetooth Voice Responder Remote Speaker/Mic (RSM)</p>	<ul style="list-style-type: none"> ▶ Bluetooth speaker-microphone designed to work with different walkie talkie style Push-to-Talk applications, including Zebra PTT Pro (check with Zebra PTT Pro engineering team for current device/OS support). ▶ Includes clip for attaching device to clothing for lapel speaker/mic usage. ▶ Features several buttons which the application developers can assign to different functions. ▶ Users can remotely control functions such as push-to-talk, phone calls, channel switching and emergency alerts. ▶ Device is ruggedized, MIL-STD 810G and IP67. ▶ Long lasting battery designed for 24 hour approx battery life. Can be recharged via micro-USB port. ▶ Includes 3.5mm headset jack allowing headphones to be connected for keeping conversations more private. ▶ Can be easily paired to mobile computer using NFC tap-to-pair. 	
<p>BTR-155 (3rd party) *</p> <p>https://www.savoxaccessories.com</p>		<p>Savox BTR-155 Bluetooth Remote Speaker/Mic (RSM)</p>	<ul style="list-style-type: none"> ▶ Bluetooth speaker-microphone designed to work with different walkie talkie style Push-to-Talk applications, including Zebra PTT Pro (check with Zebra PTT Pro engineering team for current device/OS support). ▶ Includes clip for attaching device to clothing for lapel speaker/mic usage. ▶ Rugged wireless speaker microphone IP55. ▶ Allows cable-free movement ▶ Familiar speaker microphone functions; PTT and volume buttons ▶ Includes 2.5mm headset jack allowing headphones to be connected for keeping conversations more private. ▶ LED status indication ▶ High speaker volume ▶ Includes: <ul style="list-style-type: none"> - Savox RSM - Modular Wired earpiece - Wall Charger - USB Cable - Quick Start Guide - Carrying Strap 	
<p>various (3rd party) *</p> <p>http://stonemountainltd.com</p>		<p>Stone Mountain BluSkye Bluetooth Remote Speaker Mic (RSM)</p>	<ul style="list-style-type: none"> ▶ Bluetooth speaker-microphone designed to work with different walkie talkie style Push-to-Talk applications, including Zebra PTT Pro (check with Zebra PTT Pro engineering team for current device/OS support). ▶ Device is ruggedized, MIL-STD 810G and IP68. 	
Power Cords/Power Supplies				
AC Cords and Power Supplies				
Part Number	Picture	Description	Notes	Required Items



CBL-DC-388A1-01		DC Power Cord	<ul style="list-style-type: none"> ► Used along with Power Supply PWR-BGA12V50W0WW to power 2-Slot Cradle and SACX000 4-Slot Battery Charger. ► Cable length is 1.8 meters 	
PWR-BGA12V50W0WW		Power Supply	<ul style="list-style-type: none"> ► Used to power 2-Slot Cradle and SACX000 4-Slot Battery Charger. ► 100-240 VAC, 12V, 4.16A, 50W ► Provides US DOE Level VI compliance for power efficiency. ► Replaces PWRS-14000-148R 	<ul style="list-style-type: none"> ► DC Line Cord (CBL-DC-388A1-01) ► AC Line Cord (23844-00-00R or country specific version)
KIT-PWR-12V50W		Power Supply Kit	<ul style="list-style-type: none"> ► Includes Power Supply (PWR-BGA12V50W0WW) and DC Line Cord (CBL-DC-388A1-01) 	<ul style="list-style-type: none"> ► AC Line Cord (23844-00-00R or country specific version)
CBL-DC-383A1-01		DC Line Cord	<ul style="list-style-type: none"> ► Used to power Snap-On USB/Charge Cable with Power Supply PWR-BUA5V16W0WW ► Cable length is 6 ft. 	
PWR-BUA5V16W0WW		Power Supply	<ul style="list-style-type: none"> ► Used with Charging Cable Cup, Serial/Charge Cable, and USB/Charge Cable Cups ► 100-240VAC, 5.4V, 3A, 16W ► Meets US DOE Level VI efficiency standard ► Replaces PWRS-14000-249R 	<ul style="list-style-type: none"> ► DC Line Cord (CBL-DC-383A1-01) and AC Line Cord (50-16000-182R)
CBL-DC-381A1-01		DC Power Cord	<ul style="list-style-type: none"> ► Used to power 5-Slot ShareCradles when using Level VI Efficiency power supply (PWR-BGA12V108W0WW) ► This cable does not include the black extension release latch which is not required when used on Multi-Slot ShareCradles. ► CBL-DC-382A1-01 is still typically used though. 	
CBL-DC-382A1-01		DC Power Cord	<ul style="list-style-type: none"> ► Used with Power Supply PWR-BGA12V108W0WW to power 5-Slot ShareCradles. 	
PWR-BGA12V108W0WW		Power Supply	<ul style="list-style-type: none"> ► Used to power Four Slot Cradles ► 100-240 VAC, 12V, 9A, 108W ► Provides US DOE Level VI compliance for power efficiency. ► Replaces PWRS-14000-241R 	<ul style="list-style-type: none"> ► CBL-DC-382A1-01 ► AC Line Cord (23844-00-00R or country specific version)
23844-00-00R		AC Line Cord	<ul style="list-style-type: none"> ► Used to power Cradles ► This AC Line Cord is for use in North America. See the AC Line Cords by Country TAG for comparable line cords to use in other countries. 	



50-16000-182R		AC Line Cord	<ul style="list-style-type: none"> ► Used with PWR-BUA5V16W0WWW to power Snap-on charging cables. ► This AC Line Cord is for use in North America. See the AC Line Cords by Country TAG for comparable line cords to use in other countries. 	
In-Vehicle Power Supplies				
Part Number	Picture	Description	Notes	Required Items
CHG-AUTO-CLA1-01		Cigarette Lighter Auto Charger Cable for Vehicle Cradles	<ul style="list-style-type: none"> ► 12/24V ► Includes tab on Barrel jack end for ensuring a reliable connection to TC7X Vehicle Cradles. ► Only compatible with TC7X Vehicle Cradles (CRD-TC7X-VCD1-01 or CRD-TC7X-CVCD1-01) 	
RAM-POW-CIG-M55 (3rd party) * https://www.rammount.com		RAM Male Cigarette Plug with 3 meter Cable	<ul style="list-style-type: none"> ► Typically used with RAM Charge-Only Vehicle Cradle (RAM-HOL-ZE7U). 	
CHG-AUTO-HWIRE1-01		Hard Wired Auto Charger Cable for Vehicle Cradles	<ul style="list-style-type: none"> ► 12/24V ► Includes tab on Barrel jack end for ensuring a reliable connection to TC7X Vehicle Cradles. ► Bare wire end connects directly to vehicle power source. ► Only compatible with TC7X Vehicle Cradles (CRD-TC7X-VCD1-01 or CRD-TC7X-CVCD1-01) ► Approximate cable length is 13 ft. 	
CBL-TC7X-GFS-01		Zebra Legacy Vehicle Cradle Power Adapter Cable	<ul style="list-style-type: none"> ► Allows TC7X Vehicle Cradles to use power cables from legacy Zebra device vehicle cradles including: MC5x/MC6x, MC7x, MC9x-Brick, MC9x-Short, or MC95 which use cable SKUs 25-128973-01R, 25-61987-01R, or 25-128974-01R. ► Cable length is 11.5" ► NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this cable. 	
ADPCBL-TC7X-USPS		Honeywell Legacy Vehicle Cradle Power Adapter Cable	<ul style="list-style-type: none"> ► Allows TC7X Vehicle Cradles to use power cables from legacy Honeywell vehicle cradles providing 12V - typically Honeywell 99ex. ► Cable length is about 12". ► NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this cable. 	

VAM-MPP-VHCH1-01		Vehicle Charger Cable for Vehicle Cradles/Snap-on Cables and ZQ500/ZQ600 Series Printers	<p>►Charger with charge both: (1) the TC7X Vehicle Cradles or TC7X Charging Cable Cup, Serial/Charge Cable, USB/Charge Cable Cups (2) a ZQ500/ZQ600 series printer</p> <p>►Includes the following: (1) Power Supply (P1093358) which has square locking connector and one USB-A port which can be used to charge an additional device. (2) cable for charging TC7X Vehicle Cradle (includes tab on Barrel jack end for ensuring a reliable connection to the cradle) and ZQ500/ZQ600 printer (3) cable for charging TC7X Charging Cable Cup, Serial/Charge Cable, or USB/Charge Cable Cups and ZQ500/ZQ600 printer. (4) Cigarette Lighter Adapter power cord (5) Hard Wired (bare wire) power cord</p> <p>Choose preferred charging cable (2) or (3) and preferred power cord (4) or (5)</p>	
RAM-GDS-CHARGE-V7B1U (3rd party) * https://www.rammount.com		RAM/GDS Modular Hardwire Charger with Female USB Type-A Connector	<p>►Typically used with RAM Charge-Only Vehicle Cradle (3PTY-RAM-ZE7CLU).</p> <p>►Quick disconnect feature allows easy connections to any USB Type-A device for charging.</p> <p>►Input Range: 10V - 30V DC ►Output Voltage: 5-9VDC ►Output Current: 2.5A max</p>	
3PTY-GJ-7300-0467 <small>NOTE: Products sold that do not bear the Zebra brand name are serviced and supported exclusively by their manufacturers in accordance with terms and conditions packaged with the products. Zebra's Limited Warranty does not apply to products that are not Zebra branded, even if packaged or sold with Zebra products. Please contact the manufacturer directly for technical support and customer service. See PMB 11136 for more info.</small>		Lind 12V Isolated Power Supply for Vehicle Cradles, 20-60 VDC	<p>►Typically used when powering TC7X Vehicle Cradles (CRD-TC7X-VCD1-01 or CRD-TC7X-CVCD1-01) from higher voltage vehicles.</p> <p>►20-60 VDC input, 12V DC output to cradles.</p> <p>►Optional Forklift Power Supply Clamp (3PTY-GJ-7160-1333) can be used to mount power supply to vehicle. Refer to Common Mounting Accessories TAG for details.</p>	
7300-0466 (12-32 VDC input) 7300-0467 (20-60 VDC input) 7300-0418 (72-110 VDC input) Gamber Johnson (3rd party) * http://www.gamberjohnson.com		Lind 12V Isolated Power Supply for Vehicle Cradles	<p>►Typically used when powering TC7X Vehicle Cradles (CRD-TC7X-VCD1-01 or CRD-TC7X-CVCD1-01) from higher voltage vehicles.</p> <p>►Provides 12V DC output required by cradles.</p>	
RAM-GDS-CHARGE-V7-M55U (3rd party) * https://www.rammount.com		RAM/GDS Modular Hardwire Charger	<p>►Typically used with RAM Charge-Only Vehicle Cradle (RAM-HOL-ZE7U).</p> <p>►Quick disconnect feature allows easy connections to any USB Type-A device for charging.</p> <p>►Input Range: 8V - 40V DC ►Output Voltage: 5VDC ►Output Current: 2.5A max</p>	

<p>3PTY-GJ-7300-0482</p> <p>NOTE: Products sold that do not bear the Zebra brand name are serviced and supported exclusively by their manufacturers in accordance with terms and conditions packaged with the products. Zebra's Limited Warranty does not apply to products that are not Zebra branded, even if packaged or sold with Zebra products. Please contact the manufacturer directly for technical support and customer service. See PMB 11136 for more info.</p>		<p>Forklift Wiring Kit</p>	<p>► Designed to make the install more professional by providing the correct gauge of wire and finishing accessories to complete the install on a forklift.</p> <p>► Includes:</p> <ul style="list-style-type: none"> - 15 feet of 12 gauge (AWG) wire (red and black) for handling longer wire runs and varied power applications. - In-line 15 amp fuse protects device from over voltage - Quick connects for attaching 12 gauge wire to 18 gauge power supply wires - (10) 12-inch zip ties for ease of installation <p>► If using this wiring harness for application outside of material handling, a 12 gauge wire at 15 ft long can handle a 30A fuse and customer will need to change the fuse on their own.</p>	
---	---	----------------------------	--	--

Batteries

Part Number	Picture	Description	Notes	Required Items
<p>BTRY-TC7X-46MPP-01 (single)</p> <p>BTRY-TC7X-46MPP-10 (10 pack)</p> <p>BTRY-TC7X-46MPPBR (for use in Brazil)(single battery)</p> <p>BTRY-TC7X-46MPP-IN (for use in India)(single battery)</p>		<p>TC7X Spare Standard Capacity Battery with PowerPrecision Plus (4620 mAh)</p> 	<p>► Compatible with all TC7X series devices. Blue label on battery distinguishes from TC70/TC75 series battery (BTRY-TC7X-46MAH-01 / BTRY-TC7X-46MA2-01).</p> <p>► NOTE: Spare Battery Chargers designed specifically for the TC70/TC75 series (CRD-TC7X-SE2CU1-01 and similar) will not charge this battery and may cause damage to the battery (see PMB 2863).</p> <p>► Designed, manufactured & tested to meet rigorous controls & standards</p> <p>► Premium-grade cells with higher capacity & longer life cycle</p> <p>► Designed to help prevent overcharging & electrical shock</p> <p>► Strong & robust housing for optimal performance & durability</p> <p>► Information available:</p> <ul style="list-style-type: none"> - Advanced state of Charge (shows the remaining battery power based on two factors: present charge and present real-time usage patterns of the device. - Advanced State of Health (highly accurate end-of-life prediction) - Dynamic usage patterns are constantly calculated, factoring in criteria such as the applications that are in use and scanning frequency). 	

<p>BTRY-TC7X-46MAH-01 (single) BTRY-TC7X-46MAH-10 (10 pack)</p>		<p>TC70/TC75 Spare Standard Capacity Battery with PowerPrecision (4620 mAh)</p> 	<ul style="list-style-type: none"> ▶ Expected to be discontinued 2/2025, now use BTRY-TC7X-46MPP-01 or BTRY-TC7X-46MPP-10 - see PMB 10263. ▶ Only recommended for use in TC70/TC75 series. If used in TC70x/TC75x/TC72/TC77 battery will not give an accurate reading of the capacity or the state of health. For all charge levels the battery capacity indicator will read 50% (see PMB 2863). ▶ Designed, manufactured & tested to meet rigorous controls & standards ▶ Premium-grade cells with higher capacity & longer life cycle ▶ Designed to help prevent overcharging & electrical shock ▶ Strong & robust housing for optimal performance & durability ▶ Information available: <ul style="list-style-type: none"> - Available charge status - Total charge accumulated on the battery - Basic state of health 	
---	---	---	--	--