



SLIM FLEXIBLE HDMI[™] CABLE WITH LOW PROFILE CONNECTORS

C2G Plus Series Slim Flexible HDMI Cable with Low Profile Connectors supports all HDMI 2.0 features* and is perfect for home theater or desktop audio video applications requiring high speed HDMI features and video resolutions up to 4K (4096 x 2160 at 60hz, 4:4:4).

The ultra-slim cable construction and the low profile, compact connector design makes this cable an ideal fit for installations in tight spaces. The Ethernet capabilities of the cable allow a user to connect multiple Ethernet enabled HDMI devices through a single Ethernet connection for accessing interactive online content or updating device firmware. This fully-functional, high bandwidth cable is tested to perform at industry standards and is backed by a lifetime warranty.











SLIM FLEXIBLE HDMI[™] CABLE WITH LOW PROFILE CONNECTORS

FEATURES

- Supports all HDMI 2.0 features*, including resolutions up to 4K (4096 x 2160) at 60Hz) which means higher quality video for viewing your screen content
- Ultra-slim cable construction (36 AWG) and low profile connectors, designed for installations in tight spaces
- Supports 32 audio channels for an immersive audio experience
- Supports CEC extensions for control of consumer electronics devices through a single control point
- Gold plated connectors for increased electrical conductivity and enhanced durability
- Backed by a Lifetime Warranty for peace of mind

^{*}Note: C2G41398 supports HDMI 1.4 features, including resolutions up to 1080p @60Hz

PLUS SERIES SLIM FLEXIBLE HDMI CABLE WITH LOW PROFILE CONNECTORS		
41361	1ft (0.3m) C2G Plus Series Slim Flexible HDMI Cable with Low Profile Connectors - 4K 60Hz	
41362	2ft (0.6m) C2G Plus Series Slim Flexible HDMI Cable with Low Profile Connectors – 4K 60Hz	
41363	3ft (0.9m) C2G Plus Series Slim Flexible HDMI Cable with Low Profile Connectors – 4K 60Hz	
41364	6ft (1.8m) C2G Plus Series Slim Flexible HDMI Cable with Low Profile Connectors - 4K 60Hz	
C2G41398	10ft (3m) C2G Plus Series Slim Flexible HDMI Cable with Low Profile Connectors - 1080p 60Hz	
C2G21006	3ft (0.9m) C2G Plus Series Slim Flexible HDMI Cable with Low Profile Connectors (2-pk) - 4K 60Hz	
C2G21007	6ft (1.8m) C2G Plus Series Slim Flexible HDMI Cable with Low Profile Connectors (2-pk) - 4K 60Hz	
C2G21008	3ft (0.9m) C2G Plus Series Slim Flexible HDMI Cable with Low Profile Connectors (3-pk) - 4K 60Hz	
C2G21009	6ft (1.8m) C2G Plus Series Slim Flexible HDMI Cable with Low Profile Connectors (3-pk) - 4K 60Hz	





SLIM FLEXIBLE HDMI" CABLE WITH LOW PROFILE CONNECTORS


SIGNAL SPECIFICATIONS	Supports HDMI 2.0 Resolutions up to 4K 60Hz, 4:4:4, 18Gbps C2G41398 Only – HDMI 1.4 features, 1080p @60Hz, 10.2Gbps		
	Supports Full HD Blu-ray Disc and HD DVD Video		
	Supports 3D Video, DVD Audio, Super Audio CD (DSD)		
	Dolby® True HD, DTS-HD Master Audio Bitstream Capable		
	Audio Return Channel (ARC)		
	Ethernet Channel	100 Mbit/s	
		Consumer Electronic Control (CEC)	
	Voltage Rating	30V	
	Temp Rating	80°C	
ELECTRICAL	Conductor Resistance	at 20°C Max, 36AWG:1598Ω/km	
SPECIFICATIONS	Insulation Resistance	10MΩ/km Min at 20°C DC 500V	
	Dielectric Strength	AC500V/1 Minute No Breakdown	
	Impedance	Pairs (Differential Mode) $100\pm10\Omega$	
PHYSICAL	Operating Temperature	-20°C to 80°C	
SPECIFICATIONS	Storage Temperature	-20°C to 80°C	
	Tensile Strength	Unaged: 1500PSI min; Aged: 70% min	
	Elongation	Unaged: 100% min; Aged: 65% mi	
	Deformation Test	Max 50%	
	Jacket Ratings	VW-1	
PHYSICAI	Shield Type	AL Foil Wrap	
CHARACTERISTICS	Cable Diameter	3.6mm	
	Minimum Bend Radius	R25.4mm	
	Connector	P1 & P2: HDMI 19 Pin Male: Solder Type, Contacts: Brass, Gold Flash, Housing: LCP, Black, Shell: Gold Plating	
	All Hood	Molded Black (Pantone/Black 6C) PVC	
	Product is CE Marked and Conforms to 2011/65/EU ROHS 2		





SLIM FLEXIBLE HDMI[™] CABLE WITH LOW PROFILE CONNECTORS

Technical Drawing

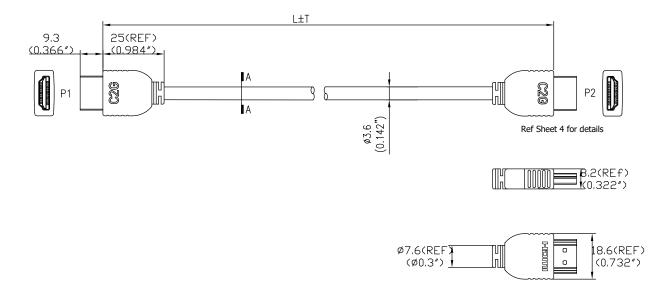

LEGRAND | AV COMMERCIAL BRANDS

C2G | Chief | Da-Lite | Luxul | Middle Atlantic | Vaddio | Wiremold