


Delock 2.5" Converter U.3 SFF-8639 to M.2 NVMe Key M - 7 mm

Description

This Delock converter enables the connection of a **M.2 SSD in 2280, 2260 and 2242 format**. The converter can be installed into your system internally through the U.3 interface.

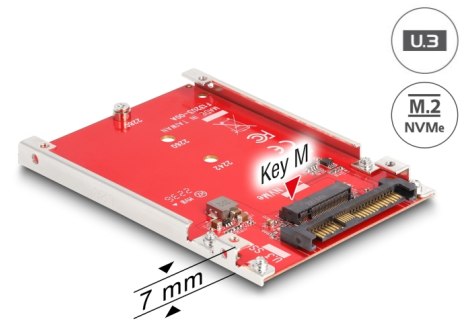

Item no. 64228

EAN: 4043619642281

Country of origin: Taiwan,
Republic of China

Package: Retail Box

Technical details

- Connectors:
 - 1 x U.3 SFF-8639 male
 - 1 x M.2 key M slot
- Interface: PCIe x4 Rev. 4.0
- Supports M.2 modules in format 2280, 2260 and 2242 with key M or key B+M based on PCIe
- Maximum height of the components on the module: 1.5 mm, application of double-sided assembled modules supported
- Supports NVM Express (NVMe)
- Bootable, ex UEFI version 2.3.1
- Maximum output power: 16.5 watt (3.3 V / 5 A)
- Dimensions (LxWxH): ca. 100 x 70 x 7 mm

System requirements

- Linux Kernel 5.15 or above
- Windows 8.1/8.1-64/10/10-64/11
- Windows Server 2019

- A free U.3 SFF-8639 interface

Package content

- Converter
 - 4 x screws for frame
 - User manual
-

Images



General

Function:	Bootable, ex UEFI 2.3.1 NVM Express (NVMe)
Supported operating system:	Windows 10 32-Bit Windows 10 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit Windows Server 2019 Windows 11 Linux Kernel 5.15 or above
Supported module:	M.2 modules in format 2280, 2260 and 2242 with key M or key B+M based on PCIe

Interface

Connector 1:	1 x U.3 SFF-8639 male
Connector 2:	1 x M.2 key M slot

Physical characteristics

Length:	100 mm
Width:	70 mm
Height:	7 mm