Blackmagicdesign

Blackmagic Cloud Dock 4

Blackmagic Cloud Dock 4 lets you share up to 4 independent 2.5 inch disks over a high speed 10G Ethernet network. Just plug in SATA HDDs and SSDs, or extreme performance U.2 disks for incredibly fast file reading and writing. You can also sync files globally using Dropbox and Google Drive sync and view all storage, connection and sync activity in real time on a display connected to the HDMI monitor port. Blackmagic Cloud Dock 4 has 4 10G Ethernet ports, an Ethernet over USB-C port and an internal power supply in a single rack unit making it highly portable network storage that's perfect for high end film and television use.

$1,395

Connections

SSD Interface

4 x removable and hot-swappable 2.5 inch U.2 SSD or SATA.

USB-C Port

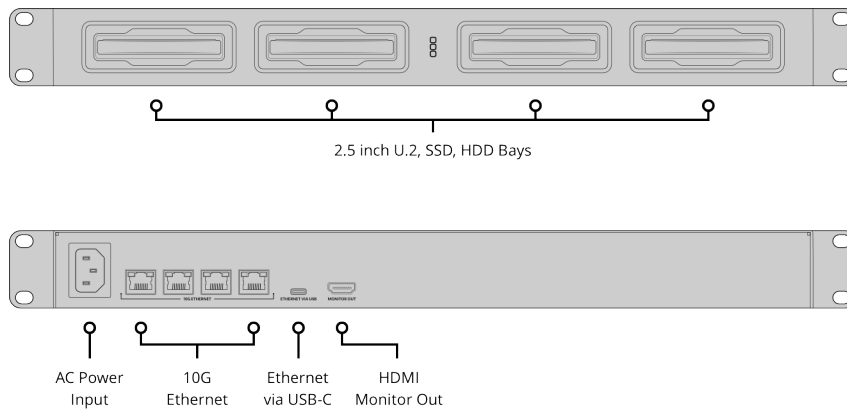1 x USB 3.0 (up to 5Gb/s). Supports Ethernet Over USB

Computer Interface

USB-C or Ethernet for shared file access, configuration and software updates.

10G Ethernet Ports

4 x 10G BASE-T

HDMI Monitor Outputs

1

2.5 inch U.2, SSD, HDD Bays

AC Power Input — 10G Ethernet — Ethernet via USB-C — HDMI Monitor Out

File Sharing Protocol

Protocol

SMB

Computer Connections

50 max.

Cloud Synchronization

Compatible Services
Dropbox
Google Drive

Storage

Storage Type
Bring your own drive.

External Storage Format
ExFAT (Windows/Mac) or HFS+ (Mac)
file systems.

Displays

HDMI Monitor Out Standards
1080p50, 1080p59.94, 1080p60

Monitor Out Displays
Device Name, storage capacity and
use, Cloud Sync status, User Activity,
Hardware Status, storage map,
network data rate graph.

Status Indicator
LED bezel indicator lights around SSD
media slots.

Device Control

External Control
USB-C or Ethernet for configuration and software updates.

Software

Software Included
Blackmagic Cloud Setup Utility
Blackmagic Proxy Generator Lite
Internal software upgrade via Blackmagic Cloud Setup using USB-C port

Operating Systems

Mac 12.0 Monterey,
Mac 13.0 Ventura or later.
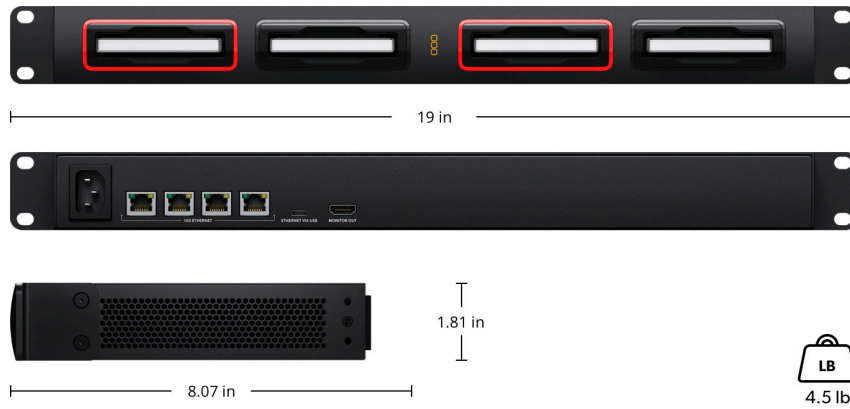
Windows 10, 64-bit.
Windows 11.

Power Requirements

Power Supply
Internal 100 - 240V AC 50/60Hz with IEC C14 mains input.

Power Usage
60W without SSDs.

Physical Specifications

19 in

1.81 in

8.07 in

LB
4.5 lb

Environmental Specifications

Operating Temperature	**Storage Temperature**	**Relative Humidity**
0° to 40° C (32°to 104° F)	-20° to 60° C (-4° to 140° F)	0% to 90% non-condensing

What's Included

Blackmagic Cloud Dock 4
Welcome wallet with QR code for software download

Warranty

12 Month Limited Manufacturer's Warranty.

Blackmagic Design Authorized Reseller