



Make It Yours.

V750 SFX GOLD ATX3.0

MPY-7501-SFHAGV

MAKE IT MINI



The V SFX Gold delivers the high quality experience you've come to expect from the V series in SFX form factor. Enjoy the same great features with fully support ATX3.0, 80 Plus Gold efficiency, full-modular cabling, an FDB fan, 16AWG PCIe high efficiency cables, and a 10 year warranty. But now you can have it in a mini-ITX case. With the V SFX Gold, the V series is now viable for cases ranging from mini-ITX all the way up through E-ATX systems. And with the included bracket this unit is compatible with all of them.

FEATURES

SFX Form Factor : This unit is compatible with all SFX cases and suitable for mini-ITX system builds.

SFX-to-ATX Bracket : The included bracket allows users to install this unit securely in traditional ATX cases.

80 PLUS Gold Certified : This certification guarantees a typical efficiency of 90% under normal operating conditions.

Fully support ATX3.0 : Fully support ATX3.0 with Peak power 200% & 300W output 12VHPWR native cable.

Full-Modular Cabling : Modular cables reduce clutter, increase airflow, and improve overall efficiency and thermal performance.

10 Year Warranty : This unit comes with a standard limited manufacturing warranty of 10 years from the date of purchase.

PACKAGE INFORMATION

Cable Type	EAN	UPC
MPY-7501-SFHAGV-3US	4719512134559	884102106873
MPY-7501-SFHAGV-3UK	4719512134566	884102106880
MPY-7501-SFHAGV-3EU	4719512134573	884102106897
MPY-7501-SFHAGV-3ST	4719512134580	884102106903
MPY-7501-SFHAGV-3AU	4719512134597	884102106910
MPY-7501-SFHAGV-3BR	4719512134603	884102106927
MPY-7501-SFHAGV-3KR	4719512134610	884102106934
MPY-7501-SFHAGV-3TW	4719512134627	884102106941
MPY-7501-SFHAGV-3JP	4719512134634	884102106958
MPY-7501-SFHAGV-3IN	4719512134641	884102106965
MPY-7501-SFHAGV-3WO	4719512134658	884102106972

Nett Weight	1.42 kg
Gross Weight	1.86 kg
Package Dimensions	260 x 190 x 100mm (10.24 x 7.48 x 3.94")
Carton Dimensions	520 x 275 x 215mm (20.47 x 10.83 x 8.46")
Unit / Carton	5 pcs
Carton / Pallet	24 pcs

SPECIFICATIONS

Product Name	V750 SFX Gold ATX3.0		
Item Code	MPY-7501-SFHAGV		
ATX Version	ATX3.0 & SFX 12V Ver. 3.42		
PFC	Active PFC		
Input Voltage	100-240V		
Input Current	10-5A		
Input Frequency	50-60Hz		
Dimensions (L x W x H)	100 x 125 x 63.5mm		
Fan Size	92mm		
Fan Bearing	FDB		
Efficiency	90% @ Typical Load		
80 PLUS Rating	80 PLUS Gold		
ErP 2014 Lot 3	Yes		
Operating Temperature	0~50°C		
Power Good Signal	100-500ms		
Hold Up Time	16ms		
MTBF	>100,000 hours		
Protections	OVP / OPP / SCP / OCP / UVP / OTP / Surge and Inrush Protection		
Regulatory	TUV, cTUVus, CE, BSMI, FCC, CCC, EAC, RCM, CB, UKCA		
Connectors	ATX 24 Pin	x1 = 1x (300mm)	
	EPS 4+4 Pin	x1 = 1x (450mm)	
	EPS 8 Pin	x1 = 1x (450mm)	
	SATA	x8 = 2x (100+115+115+115mm)	
	Peripheral 4 Pin	x4 = 1x (100+115+115+115mm)	
	PCI-e 6+2 Pin	x4 = 2x (400+120mm)	
	12VHPWR	x1 = 1x (650mm)	

AC INPUT	100-240V~, 10-5A, 50~60Hz				
DC OUTPUT	+3.3V	+5V	+12V	-12V	+5Vstb
	20A	20A	62.5A	0.3A	3A
TOTAL POWER	120W		750W	3.6W	15W
	750W				



Make It Yours.

FEATURES



SFX Form Factor




SFX-to-ATX Bracket



80 PLUS Gold Certified



Quiet FDB Fan

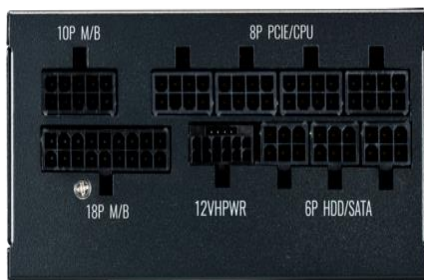

Full-Modular Cabling



10 Year Warranty

