

# DIGITUS Wall Mounting Cabinets - Slim

**DN-19 WM-V6U-SL**  
**EAN 4016032383260**



**Wall mounting cabinet, slim 800x640x309 mm, 6U vertical, color grey (RAL 7035)**

The 483 mm (19") Wall Mounting Cabinet of the Sim Series allows a vertical mounting of 6U in depth. Especially space saving for networks, DVR, sound equipment, paging- and patching applications or other 483 mm (19") active components.

**Slim design with mounting profiles for vertical installations inside**

- 1.0 - 1.5 mm strong steel sheet
- 483 mm (19") mounting areas inside: 6U in depth
- Punched out cable entries with plastic cover on all sides (145x70 mm)
- Bottom is prepared for fan units
- Lockable front door with air ventilation slots
- Door stop is easy to change
- Packaging dimensions (HxWxD): 820x660x320 mm

- Max. equipment mounting height inside: 610 mm

**Attributes**


- Cabinet type: Wall mounting cabinet, home automation
- Color: light grey, RAL 7035
- Depth: 309 mm
- Front door: Steel door, closed, single opening
- Load capacity: 100 kg
- Side panels: Both sides
- Units: 6
- Width: 640 mm
- IP protection class: IP20
- Mounted: yes

**Package contents**

- Earthing wire set
- 2 x Keys

| Logistics                    |              |             |            |            |             |                 |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------------|
|                              | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm <sup>3</sup> |
| Packaging Unit Carton        | 1            | 21.00       | 32.00      | 66.00      | 82.00       | 173,184.00      |
| Packaging Unit Inside        | 1            | 21.00       | 32.00      | 66.00      | 82.00       | 173,184.00      |
| Packaging Unit Single        | 1            | 21.00       | 32.00      | 66.00      | 82.00       | 173,184.00      |
| Net single without Packaging | 1            | 19.00       | 30.90      | 64.00      | 80.00       | 0.00            |

**More images:**

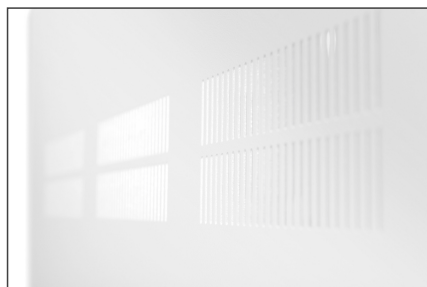

**Safety notes**

- Ensure adequate ventilation to prevent the installed devices from overheating.
- Network cabinets should not be overfilled and the ventilation openings must not be blocked.
- Cables should be laid neatly and organized in cable ducts or trays.
- Use surge protection devices to protect sensitive devices from power surges or lightning strikes.
- Avoid moisture or wetness while observing the respective IP protection class.
- Ensure that the cabinet and the devices used are properly earthed.
- In regions with frequent thunderstorm activity, professional lightning protection should be integrated into the power supply.
- To avoid uneven loading, always mount the heaviest units at the bottom of the cabinet.
- Disconnect the installed devices from the power supply during maintenance or installation work.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)