




TerraWave 2.4/5 GHz 4/6 dBi Mini Quad Ceiling Antenna with Four RA RPTNC Plugs and 18" Pigtails


Ventev's TerraWave 2.4/5 GHz 4/6 dBi small form factor ceiling mount multiple-input and multiple-output (MIMO) omnidirectional Wi-Fi antenna is designed to be operated with Cisco's latest 802.11ac Waves I & II WLAN access points. The antenna's appealing design maintains building decor while providing outstanding Wi-Fi connectivity. The 4 dual-band leads with right-angle connectors deliver exceptional performance while simplifying connection to the access point. Features a threaded plastic bushing and nut for simple ceiling tile mounting. *Every TerraWave antenna is RoHS compliant, and is covered by Ventev's two-year TerraNet warranty program. For more information: 800-851-4965 or sales@ventev.com*



Specifications		
Model	M6040060O2D1802R	
Frequency Range	2400 ~ 2500 MHz	5150 ~ 5850 MHz
Bandwidth	100 MHz	700 MHz
Gain	4 dBi	6 dBi
Vertical Beamwidth	60°	70°
Horizontal Beamwidth	360°	
VSWR	≤ 2.0	≤ 2.5
Nominal Impedance	50 Ohms	
Polarization	Vertical	
Max Power	2 Watts	
Connector	RA RPTNC Plug with 18" Pigtail	
Dimensions	5.4" x 2.9" x 1"	
Weight	0.44 lbs	
Operating Temperature Range	-40°F to +158°F	
Mounting Style	Center Thread Screw	

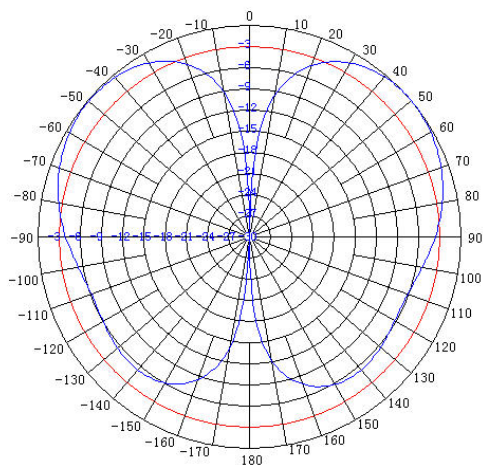


Vertical Radiation Pattern @ 2.4 GHz

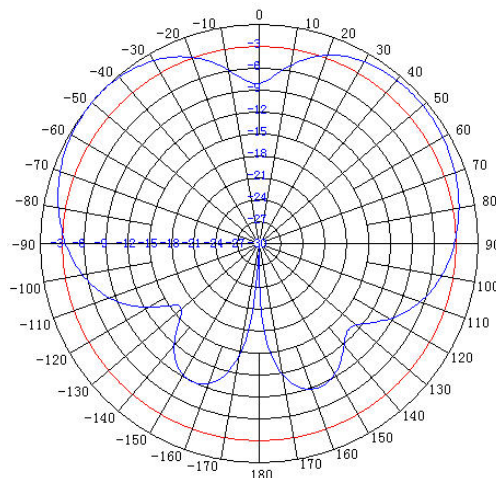

Vertical Radiation Pattern @ 5 GHz



TerraWave 2.4/5 GHz 4/6 dBi Mini Quad Ceiling Antenna with Four RA RPTNC Plugs and 18" Pigtails

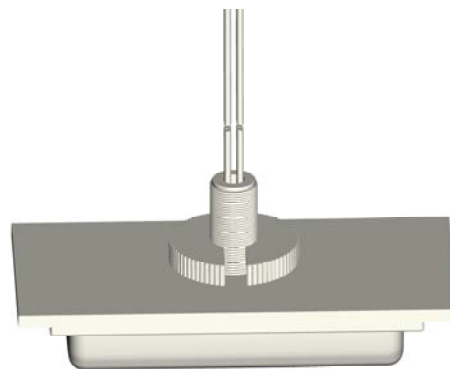

0000-117001

