

MPN: HDM191950V2.0AOP


# Premium Optic Armored Fiber HDMI 2.0 Cable 50m

Premium is a series of high-quality products within the MicroConnect brand, designed with premium materials, reliable performance, and a sharp modern design for professional connectivity solutions.

See the full Premium Assortment at the following link: <https://www.eetgroup.com/inspiration/microconnect-premium>

This cable is provided with a stainless steel and Kevlar armor to protect fibers. Furthermore, these cables are provided with heavy duty connectors with very strong covers and this makes this cable perfect for the harshest use such as concert applications where it can withstand a high pressure and protect the cable from damage. This cable are packed on this special cable are packed on this mobile reel, which makes the cable easy to install and pack after use in a nice way for next installation.

- Supporting 4K60Hz, 18Gbps
- Sampling : YUV 4:4:4
- Outer Diameter: 5,8mm, stainless steel reinforced.
- Supports EDID, CEC, HDCP (2.2), HDR (High Dynamic Range ), ARC
- Hybrid optical cable with fibre and copper wire
- Has Source & Display clearly printed on the connector for easy identification: No loss of signal – delivering crystal clear digital images instantly
- Has high pulling strength and compression load
- Crush Resistance: Long term 100kg
- Short term 200kg

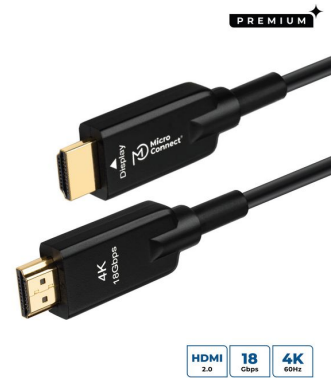

## Specifications

Features	3D	Yes
Audio Return Channel (ARC)	Yes	Yes
Cable jacket material	Thermoplastic polyurethane (TPU)	
Cable length	50 m	
Cable material	Fiber optic	
Connector 1	HDMI Type A (Standard)	
Connector 1 form factor	Straight	
Connector 1 gender	Male	
Connector 2	HDMI Type A (Standard)	
Connector 2 form factor	Straight	
Connector 2 gender	Male	
Connector contacts plating	Gold	
Data transfer rate	18 Gbit/s	
Dolby technologies	Dolby TrueHD	
HDCP	Yes	

<b>Features</b>	<b>HDCP version</b>	1.4/2.2
	<b>HDMI version</b>	2.0
	<b>High Dynamic Range (HDR) supported</b>	Yes
	<b>Maximum refresh rate</b>	60 Hz
	<b>Maximum resolution</b>	4096 x 2160 pixels
	<b>Plug and Play</b>	Yes
	<b>Product colour</b>	Black
	<b>Quantity per pack</b>	1 pc(s)
	<b>RoHS compliance</b>	Yes
	<b>Supported graphics resolutions</b>	4096 x 2160
<b>Operational conditions</b>	<b>Operating temperature (T-T)</b>	-40 - 80 °C
<b>Vendor information</b>	<b>Brand Name</b>	MicroConnect
	<b>Homepage</b>	<a href="https://microconnect.me/">https://microconnect.me/</a>
	<b>Warranty</b>	25 Year(s)
<b>Weight &amp; dimensions</b>	<b>Cable diameter</b>	5.8 mm

## Other products in this series

Cable length	
50	HDM191950V2.0AOP
100	HDM1919100V2.0AOP

## Other images

