


Technical Specifications

HP E27d G4 QHD Advanced Docking Monitor

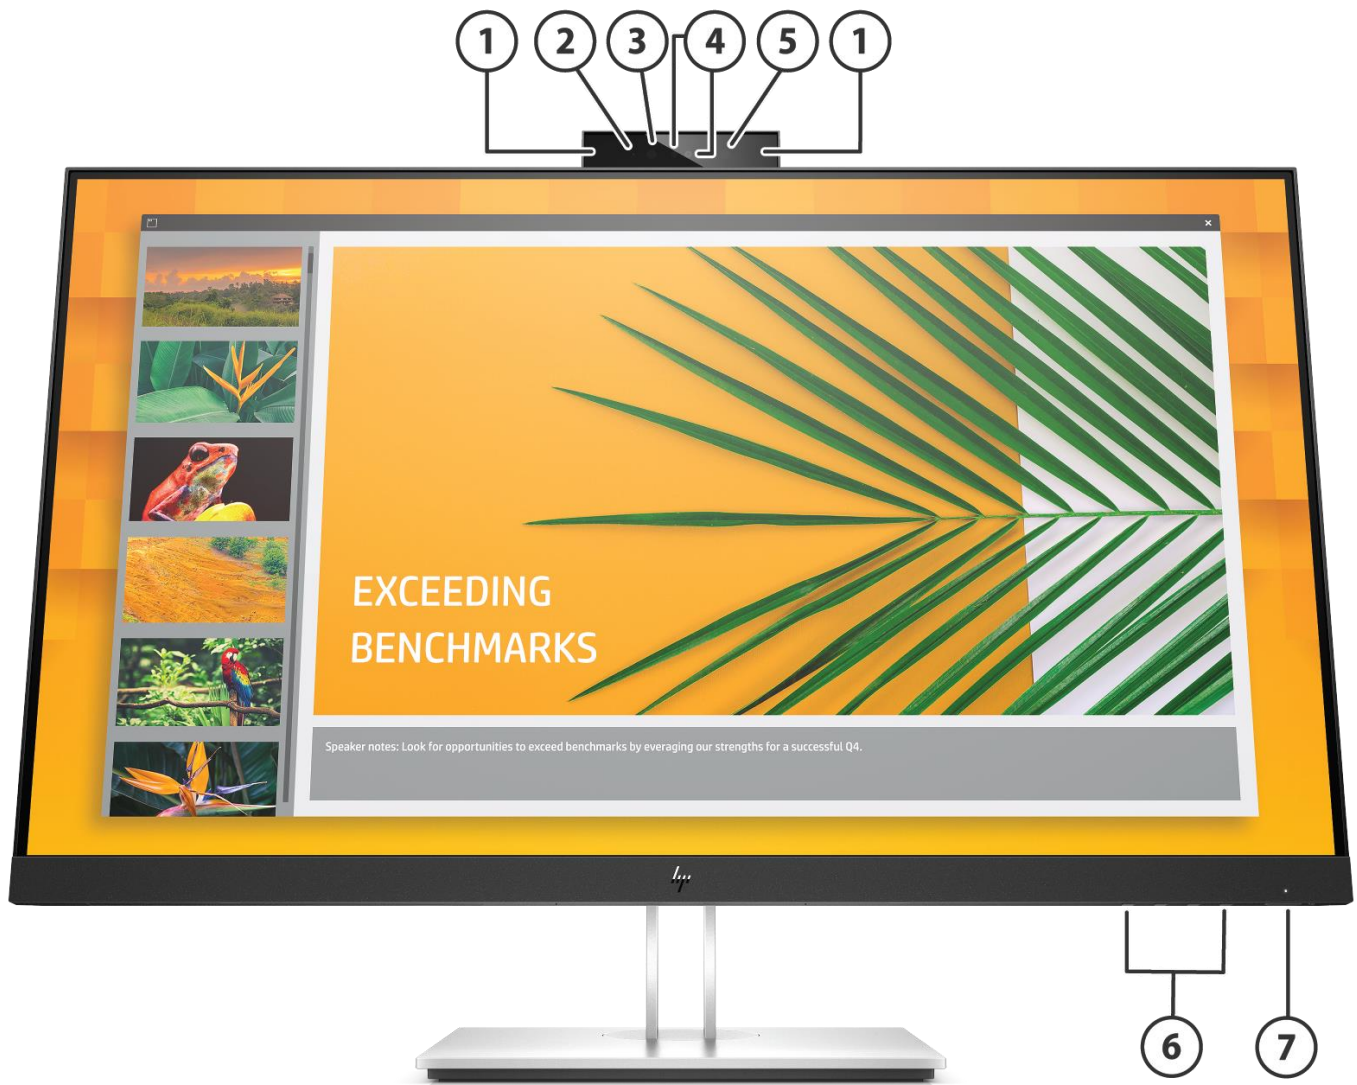


Front

- | | |
|--------------------|------------------------------------|
| 1. Microphones (2) | 5. IR Lens |
| 2. Camera Light | 6. OSD Buttons |
| 3. RGB Lens | 7. Power Button (With power light) |
| 4. IR Lights | |

Technical Specifications

HP E24d G4 FHD Advanced Docking Monitor

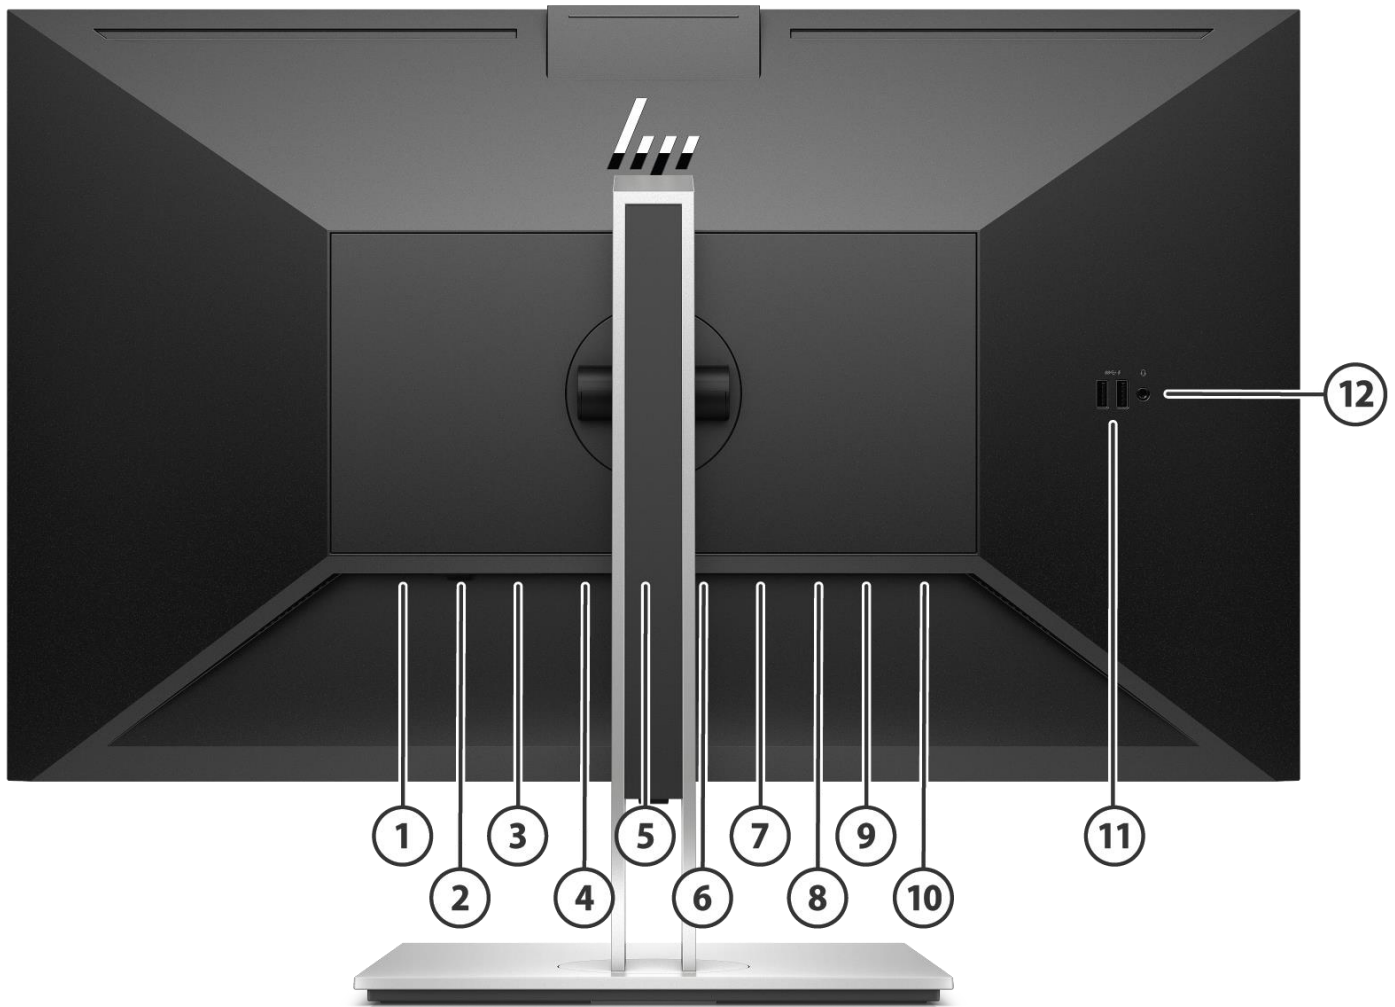

Back

1. Security Cable Slot
2. Master Power Switch
3. Power Connector
4. HDMI Port
5. DisplayPort™ connector
6. USB Type-C™ Port (Connect to Notebook)
7. DisplayPort™ OUT connector
8. USB Type-C™ downstream port
9. RJ-45 (Network) Jack
10. USB SuperSpeed Ports (2)
11. USB SuperSpeed Ports (2)
12. Audio-Out (Headphone)/Audio-in (Microphone) Combo Jack

Technical Specifications

Models: 6PA56A8

Panel Specifications	Display Size (Diagonal)	27-in
	Display Panel Type	IPS
	Micro-Edge Bezel	Yes, 3-sided
	Native Resolution/Timing	2560 x 1440 @60Hz
	Native Resolution	USB Type C™
	Panel Bit Depth	8-bit
	Aspect Ratio	16:9
	Brightness - Typical	300 cd/m ²
	Static Contrast Ratio - Typical	1000:1
	Static Contrast Ratio - Minimum	700:1
	Dynamic Contrast Ratio (DCR)	5M:1
	Flicker Free	Yes
	Pixel Pitch	0.2331(H) x 0.2331(V)
	Pixels Per Inch (PPI)	109
	Backlight Lamp Life (to half brightness - in hours)	30k minimum
	Anti-Glare Panel	Yes
	Response Time - Typical	5 ms
	Horizontal Viewing Angle (typical CR>10)	178°
	Vertical Viewing Angle (typical CR>10)	178°
	Panel Active Area (w x h)	596.736(H) x 335.664(V) mm
	Preset Graphic Modes/Supported Resolutions	640 x 480 @60Hz 720 x 400 @70Hz 800 x 600 @60Hz 1024 x 768 @60Hz 1280 x 720 @60Hz 1280 x 800 @60 Hz 1280 x 1024@60Hz 1440 x 900 @60Hz 1600 x 900 @60Hz 1680 x 1050 @60Hz 1920 x 1080 @60Hz 2560 x 1080 @60Hz 2560 x 1440 @60Hz
	Maximum Resolution	2560 x 1440 @60Hz
	Recommended Resolution	2560 x 1440 @60Hz
	Vertical Scan Range	48-75 Hz
	Horizontal Scan Range	30-90 kHz
	Default Color Temperature	Neutral (6500K)
NOTE: Performance specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower.		
Color Gamut Coverage	sRGB	99% sRGB
Color Management	Factory Color Presets	Neutral
	Color Space / Subsampling Support	RGB 4:4:4, YCBCR 4:4:4, YCBCR 4:2:2
	Default Color Temperature	Neutral (6500 K)
	Low Blue Light Modes	Yes
	RGB Channel Adjust	Yes, Gain

Technical Specifications

Monitor Specifications	Exterior Color of Monitor Bezel and Stand	Black
	Plug & Play	Yes
	Tilt	-5° to +20°
	Swivel	+/-30°
	Pivot	+/-90°
	Height Adjustment Range	150 mm
	VESA Mounting	Yes, 100 mm with integrated mount or with included bracket
	Security Lock Ready	Yes
	Detachable Base	Yes, ships detached
	Warranty	3-3-0 US/JP/AP/EU 3-3-3 AP/PRC
Multimedia	Webcam	Yes
	Infra-Red Sensors	Yes, 1
	Windows Hello Compatible	Yes
	Microphone	Yes
On Screen Display (OSD)	On Screen Display User Controls	Brightness+, Color, Image, Input, Power, Menu, Management, Information
	Monitor Control Buttons or Switches	Menu, Minus ("-")/Information, Plus ("+") /Viewing Mode, OK/Next Active Input, Power
	User-Assignable Function Buttons	Yes, 3 (6 Options)
	Languages	10 (Dutch, T-Chinese and S-Chinese, English, Spanish, French, Italian, Japanese, Netherlands, Portuguese)
Connector Types	DisplayPort™	1 DisplayPort™ 1.2 in 1 DisplayPort™ 1.2 out
	HDMI	1 HDMI 1.4
	USB Type-C™	1 USB Type C™ upstream (Power delivery up to 100 W) 1 USB Type C™ downstream (Power delivery up to 15 W)
	HDCP support	Yes
	Audio Output	1 Headset / Microphone
	Ethernet	Yes
	USB Port Specifications	USB Version
	USB Hub	Yes
	Downstream Ports	5 Ports
	Upstream Ports	1 Port
	Fast Charging USB Ports	4 Ports (Rear, Side) (USB-A)
	Power Output Maximum	Fast Charging: 7.5 W
USB-Type C™ Port Specifications	USB-Type C™ Version	USB 3.1 Gen2 / 10G bps
	USB-Type C™ Hub	Yes
	Downstream USB-Type C™ Ports	1 Port
	Upstream USB-Type C™ Ports	1 Port
	Video Support	USB-C™ Alt mode - DisplayPort™ v1.4 / v1.2
	Power Output	5V/9V/12V/15V/20V, 5A
	Power Output Maximum	Up to 100 W
Special Features	User Presets	Yes
	User Updateable Firmware	Yes

Technical Specifications

Power & Operating Specs	Power Supply	Internal
	Power Source	100 – 240 VAC 50/60 Hz
	Power Consumption - Maximum	175 W
	Energy Saving/Standby Mode	0.5 W
	Power Consumption - Typical	80 W
	Power cable length	1.9 m
EU Energy Efficiency Class (EC1062)	On-mode Power Consumption (EC 1062/2010)	30 W
	Annual Power Consumption (EC 1062/2010)	43 kWh
	Energy Efficiency Class (EC 1062/2010)	A
	Visible Screen Size	27" / 68,6 cm Diagonal
Operating Conditions	Operating Temperature - Celsius	5° – 35°C
	Operating Temperature - Fahrenheit	41°C – 95°F
	Non-operating Temperature - Celsius	–20° – 60°C
	Non-operating Temperature - Fahrenheit	–4° - 140°F
	Operating Humidity	20 – 80% Relative Humidity (non-condensing)
	Non-operating Humidity	5 – 95%
	Operating Altitude	0 – 5,000 m (16,400 ft.)
	Non-operating Altitude	0 – 12,192 m (40,000 ft.)
Environmental Features and Certifications	Mercury-free LED display backlighting	Yes, Mercury-free LED backlighting
	Arsenic-Free Display Glass	Yes
	Low Halogen*	Yes GSE HP-00011-01B, table 2 defines low-halogen (BFR, CFR, PVC) NOTE: External power supplies, power cords, cables and peripherals are not Low Halogen. Service parts obtained after purchase may not be Low Halogen.
	Agency Approvals and Certifications	WW certificate CE, CB, KC/KCC/NOM/ISO 9241-307/ EAC/TUV-GS/cTUVus/PSB/CCC/CEL/ISC/VCCI/FCC/BSMI/Vietnam MEPS/Australian-New Zealand MEPS/WEEE/BIS/CEC/E-Standby/Low Blue Light/CECP/TUV-S/CECP
	Microsoft WHQL Certification	Win 10, Win 8, Win 7
	China Energy Label	CEL Grade 1
	SmartWay Transport Partnership - NA only	Yes (NA SKU)

*External power supplies, power cords, cables and peripherals are not Low Halogen. Service parts obtained after purchase may not be Low Halogen.

Note: DisplayPort™ and the DisplayPort™ logo are trademarks owned by the Video Electronics Standards Association (VESA®) in the United States and other countries.

Metric

Imperial

Technical Specifications

Unit Product/Package Specifications	Product Dimensions (Unpacked with stand) (W x D x H)	61.36 x 53.54 x 4.85 cm	24.16 x 21.08 x 1.91 in	
	Product Dimensions (Packed) (W x D x H)	69.6 x 46.9 x 275 cm	27.40 x 18.46 x 10.83 in	
	Display Head Dimensions (Unpacked without stand) (W x D x H)	61.36 x 36.6 x 4.85 cm	24.16 x 14.41 x 1.91 in	
	Base Area Footprint (w x d mm)	300 x 220 mm	18.11 x 86.61 in	
	Bezel Measurements	Bottom 21.0 mm (display chin)	Bottom 0.83 in (display chin)	
	Product Weight (Unpacked with stand)	8.2 kg	18.08 lb	
	Product Weight (Packed)	13.3 kg	29.3 lb	
	Product Weight (Head Only)	5.5 kg	12.1 lb	
	Pallet Information	Pallet Dimensions (L x W x H)	1140 x 730 x 120 mm	44.88 x 28.74 x 4.72 in
		Pallet Total Weight (L x W x H)	40" GQ: 223 kg 40" HQ: 276 kg	40" GQ: 492 lbs 40" HQ: 609 lbs
Pallet Layers		GQ: 4 HQ: 5		
Pallet Product per Layer		4		
Total Products per Pallet		GQ: 16 HQ: 20		
Container Load, 20-Foot		Wood pallet: 256 Slip sheet: 256		
Container Load, 40-Foot		Wood pallet: 512 Slip sheet: 512		
	Container Load, 40-Foot HighQ	Wood pallet: 640 Slip sheet: 640		
Software Included	HP Display Assistant			
What's in the box?	1 HDMI 2.0	(1.8 m) 5.9 ft		
	1 DisplayPort™ (DisplayPort™ 1.2)	(1.8 m) 5.9 ft		
	1 USB3 Gen 2	(1 m)		
	1 Power Cord	(1.9 m) 6.2 ft		
	1 QSP 1 Doc-Kit			
User Guide and Warranty Languages	User Guide Languages	English, Arabic, S. Chinese, T. Chinese, Czech, Danish, Dutch, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Kazakh, Korean, Norwegian, Polish, Brazilian Portuguese, Russian, Slovenian, Spanish, Swedish and Turkish.		
	Warranty Languages	English, Arabic, S. Chinese, T. Chinese, Czech, Danish, Dutch, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Kazakh, Korean, Norwegian, Polish, Brazilian Portuguese, Russian, Slovenian, Spanish, Swedish and Turkish.		

Technical Specifications

Copyright © 2019 HP Development Company, L.P.

The information contained herein is subject to change without notice. The only warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

Microsoft and Windows are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. ENERGY STAR is a registered trademark owned by the U.S. Environmental Protection Agency.

Summary

Change Log	
V1 to V2	