


## Delock Slot bracket with 1 x SATA 22 pin plug external

### Description

The slot bracket by Delock expands the PC by a SATA 22 pin plug and makes it possible to lead the internal SATA connector to the outside, in order to connect external SATA devices with the help of a cable (e.g. item 84406). This allows e.g. card readers (item 91661 and 91673) or hard disks to be operated externally in case of service.

The cables of the slot bracket are connected internally to the motherboard and the power supply unit. Thus the internal power connection and the SATA connection are led to the outside, in order to connect devices with SATA 22 pin connection to the computer.

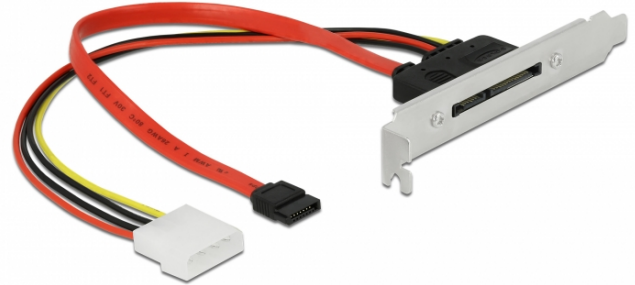

### Note

It is not possible to connect SATA cables with latching function.

### Specification

- Connectors:
  - internal:
    - 1 x SATA 6 Gb/s 7 pin receptacle
    - 1 x Molex 4 pin male
  - external:
    - 1 x SATA 6 Gb/s 22 pin plug
- Data transfer rate up to 6 Gb/s
- Downwards compatible to SATA 1.5 Gb/s and 3 Gb/s
- Screw type: #4-40 UNC
- Cable gauge:
  - 26 AWG data line
  - 18 AWG power line
- Slot bracket: standard
- Cable length without connectors: ca. 25 cm

### System requirements

- PC with one free slot
- A free SATA 7 pin plug on the motherboard
- A free Molex 4 pin receptacle

### Package content

- Slot bracket

### Item no. 90418

EAN: 4043619904181

Country of origin: China

Package: • Zip poly bag

General	
Form factor:	Slot bracket
Specification:	SATA 6 Gb/s
Interface	
External:	1 x SATA 6 Gb/s 22 pin plug
Internal:	1 x 4 pin power connector 1 x SATA 6 Gb/s 7 pin receptacle
Technical characteristics	
Data transfer rate:	6 Gb/s
Physical characteristics	
Cable length:	25 cm
Conductor gauge:	26 AWG data line 18 AWG power line
Screw type:	#4-40 UNC