


# Delock PCI Express x4 Card to 4 x external SuperSpeed USB 10 Gbps (USB 3.2 Gen 2) USB Type-A female

## Description

The PCI Express card by Delock expands a PC by **four external USB 3.2 ports**. Different USB devices, such as docking stations, card readers, external enclosures etc., can be connected to the card. The card allows a data transfer rate of 10 Gbps on all ports when used simultaneously.

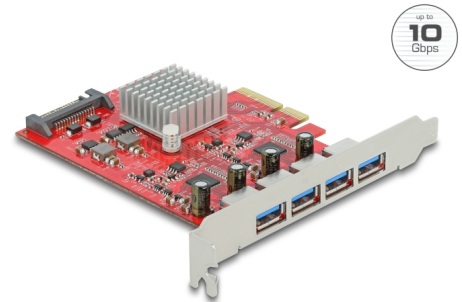

## Power supply

The PCIe card can be supplied with power via the PCIe connector. If this is not sufficient, the card has a SATA power connector. At each USB port the **maximum output is 2 A**, all ports together have an output of maximum 8 A.

### Item no. 90481

EAN: 4043619904815

Country of origin: Taiwan, Republic of China

Package: Retail Box

## Technical details

- Connectors:
  - external:
    - 4 x SuperSpeed USB 10 Gbps (USB 3.2 Gen 2) Type-A female
  - internal:
    - 1 x SATA 15 pin power connector
    - 1 x PCI Express x4, V3.0
- Chipset: Asmedia ASM3142, ASM2806
- Data transfer rate up to:
  - SuperSpeed USB 10 Gbps,
  - SuperSpeed USB 5 Gbps,
  - Hi-Speed 480 Mbps,
  - Full-Speed 12 Mbps,
  - Low-Speed 1.5 Mbps
- Downwards compatible to USB 3.0, USB 2.0, USB 1.1
- Power supply via PCI Express interface or via SATA 15 pin power connector
- Electrical power per port: max. 10 watt (5 V / 2 A)

- Supports eXtensible Host Controller Interface (xHCI) specification 1.1
- 


## System requirements

- Linux Kernel 3.18.37 or above
  - Windows 8.1/8.1-64/10/10-64/11
  - PC with one free PCI Express x4 / x8 / x16 / x32 slot
- 

## Package content

- PCI Express card SuperSpeed USB 10 Gbps
  - User manual
- 

## Images

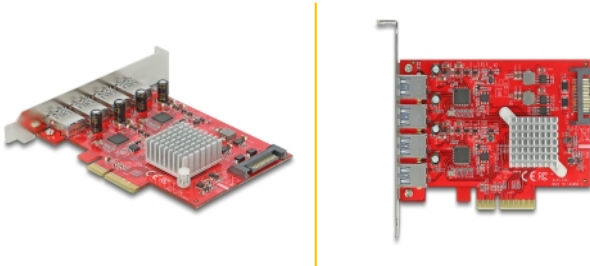

## General

Supported operating system:	Linux Kernel 3.18.37 or above Windows 10 32-Bit Windows 10 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit
-----------------------------	---

## Interface

External:	4 x SuperSpeed USB 10 Gbps (USB 3.2 Gen 2) Type-A female
Internal:	1 x PCI Express x4, V3.0 1 x SATA 15 pin power connector

## Technical characteristics

Chipset:	Asmedia ASM3142
----------	-----------------

## Physical characteristics

Slot bracket:	standard
---------------	----------