


Delock PCI Express x2 Card to 2 x RJ45 2.5 Gigabit LAN i225

Description

The PCI Express card by Delock offers **two network ports** with a data transfer rate up to **2500 Mbps**.

NBASE-T for higher speed

Modern services and new technologies require higher bandwidths. NBASE-T technology enables speeds of 1 Gbps and 2.5 Gbps with conventional networking cables. The best possible transmission rate is set automatically.

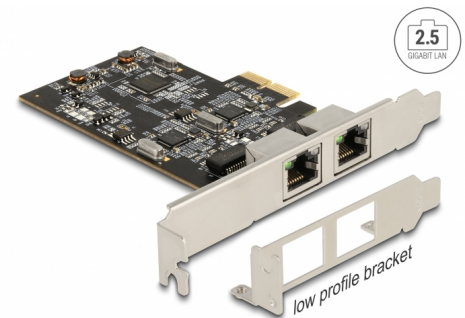

Item no. 89392

EAN: 4043619893928

Country of origin: China

Package: Retail Box

Technical details

- Connectors:
external: 2 x 2.5 Gigabit LAN RJ45 jack
internal: 1 x PCI Express x2, V2.1
- Chipset: Intel i225V
- Data transfer rate:
Ethernet up to 10 Mbps
Fast Ethernet up to 100 Mbps
Gigabit Ethernet up to 1000 Mbps
NBASE-T with up to 2.5 Gbps
PCI Express x1 up to 4 Gbps
- Supports IEEE 802.3 / 802.3u / 802.3ab
- Supports Wake On LAN (WOL)
- Supports 9k Jumbo Frames
- Supports PXE
- LED indicator for link and activity


System requirements

- Linux Kernel 5.8 or above
- Windows 10/11
- PC with one free PCI Express x2 / x4 / x8 / x16 / x32 slot

Package content

- PCI Express card
- Low profile bracket
- Driver CD
- User manual

Images



General

Supported operating system:	Linux Kernel 5.8.0 or above Windows 10 64-Bit Windows 11
LED indicator:	Link and activity

Interface

External:	2 x Gigabit LAN RJ45 jack
Internal:	1 x PCI Express x2, V2.0

Technical characteristics

Chipset:	Intel® i225V v3
Data transfer rate:	Ethernet up to 10 Mbps Fast Ethernet up to 100 Mbps Gigabit Ethernet up to 1 Gbps Gigabit Ethernet up to 2.5 Gbps

Physical characteristics

Slot bracket:	Low Profile standard
---------------	-------------------------