



Lindy USB Type C to DisplayPort 4K144 Converter

Brand : Lindy

Product code: 43269

Product name : USB Type C to DisplayPort 4K144 Converter

- Converts a USB Type C port to an DP port
- Supports DP resolutions up to 4K 3840x2160@144Hz
- Requires DisplayPort Alternate Mode support by the USB Port/Bus
- Plug and Play, no drivers required
- 2 year warranty

USB Type C to DisplayPort 4K144 Converter

Lindy USB Type C to DisplayPort 4K144 Converter:


The Lindy USB Type C to DisplayPort Converter allows users to easily add external video capabilities to a computer featuring the USB Type C port with support for DisplayPort Alternate Mode. The converter is powered by the USB Bus, therefore no external power supply is needed, saving space and time when connecting.

With support for resolutions up to 3840x2160 144Hz, content can be viewed with superior clarity and stunning accuracy, while the Type C connectors reversible design means a connection can be found regardless of which way the cable is inserted into the port of a laptop, notebook or Macbook.

With Plug and Play installation, this converter can be installed with minimum fuss, perfect for both professional and first time users.



Performance		Design	
USB connector type	USB Type-C	Product colour	Black
USB connector gender	Male	Housing material	Acrylonitrile butadiene styrene (ABS), Plastic
USB connector form factor	Straight	Weight & dimensions	
DVI output *	✗	Width	45 mm
HDMI output *	✗	Depth	45 mm
DisplayPort output *	✓	Height	15 mm
Number of displays supported *	1	Weight	30 g
USB 3.2 Gen 1 (3.1 Gen 1) Type-C ports quantity	1	USB cable length	0.21 m
HDCP version	2.2	Operational conditions	
DisplayPort version	1.4	Operating temperature (T-T)	-20 - 40 °C
Maximum resolution	3840 x 2160 pixels	Storage temperature (T-T)	-40 - 80 °C
Refresh rate at maximum resolution	144 Hz	Operating relative humidity (H-H)	10 - 85%
Supported graphics resolutions	3840 x 2160	Packaging data	
Chipset	LT87101CD	Package width	174 mm
Data transfer rate (max)	32.4 Gbit/s	Package depth	194 mm
Certification	CE, FCC, RoHS, REACH, CP65	Package weight	39 g
		Technical details	
		Compliance certificates	CE, RoHS, REACH

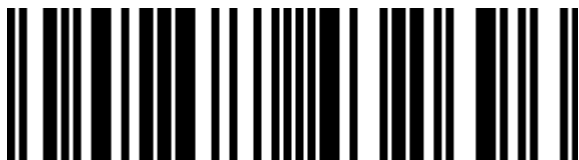

4002888432696

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.