



Lindy 1.5m DisplayPort 1.2 Cable, Black Line

Brand : Lindy

Product code: 36494

Product name : 1.5m DisplayPort 1.2 Cable, Black Line

1.5m DisplayPort 1.2 Cable, Black Line

[Lindy 1.5m DisplayPort 1.2 Cable, Black Line:](#)

From the Lines cable connectivity concept developed by Lindy, Black Line DisplayPort cables are fully featured, entry level high resolution connection solutions, perfect for home and small office use.

Black Line DisplayPort cables feature triple shielded construction with 30AWG copper conductors for performance and corrosion resistance. Nickel connectors and 24K gold plated contacts maintain signal integrity and reliability.

UHD resolutions up to 4K 4096x2160@60Hz 4:4:4 10bit are supported. Black Line DisplayPort cables are also capable of transmitting 32 channel audio and Dolby® True HD. Black Line DisplayPort cables are capable of delivering 4:4:4 colour spacing for the most accurate colour representation possible.

Black Line DisplayPort cables are available in lengths from 0.5m to 3m.



Features

Connector 1 form factor	Straight
Connector 2 form factor	Straight
Connector contacts plating	Gold
DisplayPort version	1.2
Maximum resolution *	4096 x 2160 pixels
Supported graphics resolutions	4096 x 2160
Maximum refresh rate	60 Hz
3D	✓
Cable length *	1.5 m
Connector 1 *	DisplayPort
Connector 2 *	DisplayPort
Connector 1 gender *	Male
Connector 2 gender *	Male
Product colour *	Black
Cable material	Copper
Cable shielding	Copper
Jacket material	Polyvinyl chloride (PVC)
Connector housing material	Acrylonitrile butadiene styrene (ABS)
AWG wire size	30
Data transfer rate	21.6 Gbit/s
Contact material	Phosphor bronze

Features

Connector material	Nickel
Colour sampling	4:4:4
Cable type	Round cable
Nominal attenuation	300kHz-825MHz - 5dB, 825MHz-2.475GHz - 5dB, 2.475GHz-4.125GHz - 12dB, 4.125GHz-5.1GHz - 20dB

Operational conditions

Operating temperature (T-T)	-20 - 80 °C
Storage temperature (T-T)	-25 - 85 °C

Certificates

Certification	RoHS, REACH, UL
---------------	-----------------

Weight & dimensions


Cable diameter	6 mm
Connector 1 dimensions (WxDxH)	21 x 38.9 x 13.6 mm
Connector 2 dimensions (WxDxH)	21 x 38.9 x 13.6 mm
Bend radius (min)	4.8 cm

Packaging data

Package type	Polybag
--------------	---------

Logistics data

Harmonized System (HS) code	84733080
-----------------------------	----------

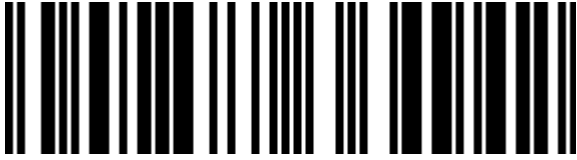

4002888364942

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity. Automated scraping, data mining, or harvesting for the purpose of training machine learning models, neural networks, or artificial intelligence systems is strictly prohibited without a commercial license.